

WEBB
DECO

WEBB DECO

GENERAL CATALOGUE PROGRAM
2019-2020

LED 埋地灯

In-ground Luminaires



10.0911
P_001



10.0921
P_005



10.0912
P_009



10.0913
P_013



10.0913E
P_017



10.0914
P_021



10.0915
P_025



10.0924
P_031



10.0925
P_035




10.0734
P_039



10.0808S
P_043



10.0808D
P_043



10.0808F
P_043



10.0808N
P_043




10.0614
P_047



10.T029
P_051




10.0942
P_055



10.0931
P_061



10.0932
P_065



10.0933
P_069



10.0934
P_073



10.0935
P_077

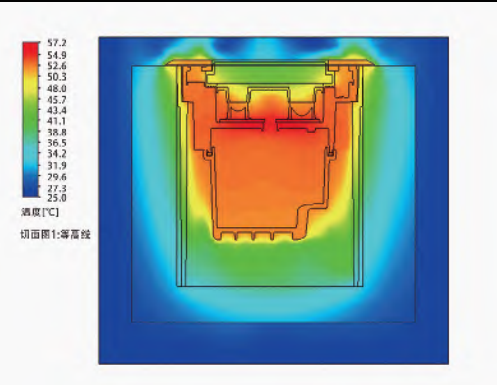
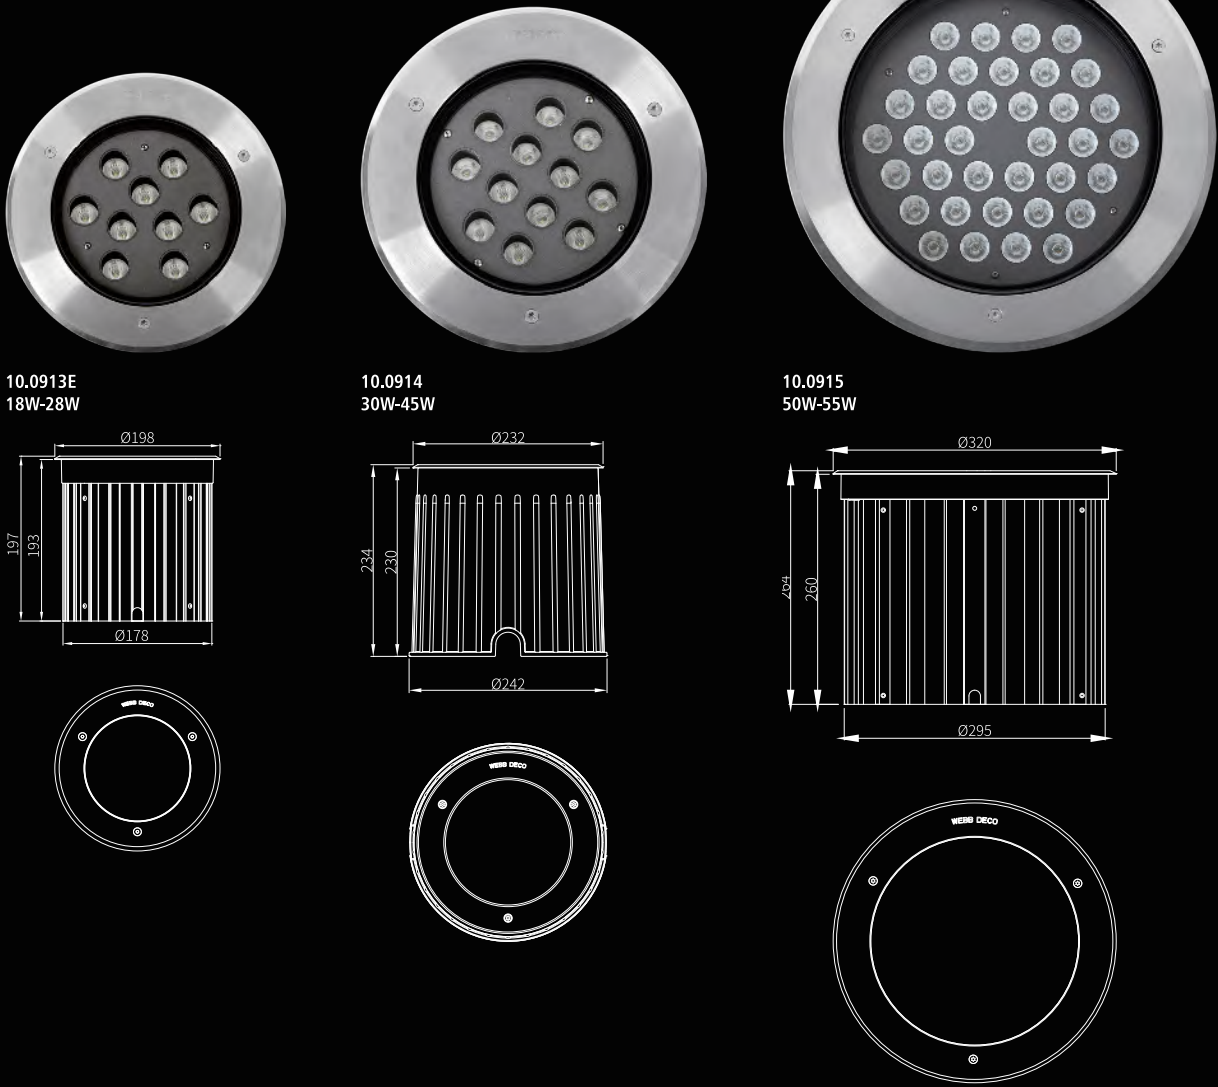
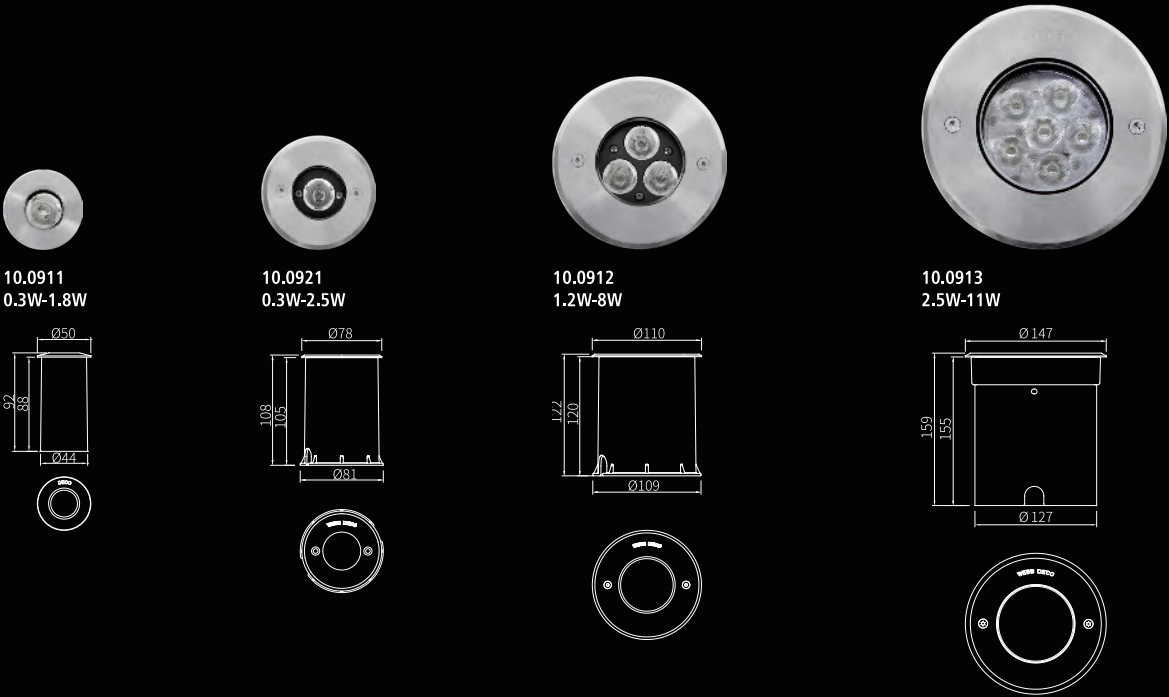


10.0936
P_081



青岛·奥帆中心
Olympic Sailing Center · Qingdao

家族式产品系列，多种灯
体尺寸及多种功率选择
Family product line, different
sizes and power catagories.



优异的散热性能
Excellent heat dissipation



铝面盖找平安装及不锈
钢面盖搭边安装的配置
适应不同安装环境要求
Aluminum cover flush
mounting & Stainless
steel covered mounting
options available



7° 10° 25° 40° 60° 偏配光
多种不同的配光角度选择
Different options of beam
angle light distribution



可承载 2000 千克静态压力
Static pressure loading
≥ 2000kgs



玻璃表面温度约 40°C
Temperature of surface
glass≈40°C



玻璃表面温度约 40°C
Temperature of surface
glass≈40°C



在外接电缆处配置专利设计的
防吸水器，防止水气从电缆处
浸入灯体
Patented design of anti-
condensation device attached
to the external cable to
stop humidity from power
connection



10.0911



材质: ADC12 铝合金灯体;
304/316 不锈钢面盖;
硅胶胶圈密封;
PP 塑料预埋件;
铜镀镍防水接头;
8mm 钢化安全玻璃。

表面处理: 双层耐候耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30°C~ +50°C;
可调角度范围: 不可调

线材: 单色常亮: 1 条 0.5 米两芯线, 线径 7.0mm;
DMX512 控制: 1 条 0.5 米六芯线, 线径 7.5mm

包装: 灯具净重: 0.18kg
内盒尺寸: 100x60x65mm
外箱尺寸: 420x260x220mm
包装容量: 48 灯 / 箱
包装毛重: 10kg

Material: ADC12 corrosion-resistant die-cast aluminum housing;
8mm clear safety glass;
Anti-aging waterproof silicone gasket;
304/316 stainless steel cover ring and external fasten screws;
PP Plastic recessed box

Finishing: Stainless steel

Installation: Ambient temperature: -30°C~ +50°C ;
Single Color: 1x 0.5m length 2-cores Ø7.0mm power supply cable;
DMX512 controllable: 1x 0.5m length 6-cores Ø7.5mm cable;
Nickled plated brass waterproof cable gland

Packaging: Net Weight: 0.18kg
Inner carton: 100x60x65mm
Outer carton: 420x260x220mm(48pcs/ctn)



40°C @ Ta 25°C



Anti-condensation kit



Optional Accessory
IP68 Junction box



10.0901
Aluminum cover for
Flush mounting












Flush mounting
Covered mounting



Compact size



10.0911



 LED 2.2W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 634.4 103.2 24.2 6	maxlux 932 151.8 36.4 9
 LED 2.2W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 137 27.4 6.1 1.6	maxlux 249 39.5 9.1 2.4
 LED 2.2W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 69.8 12.1 2.8 1.2	maxlux 94 15.2 3.9 1.8
 LED 2.2W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 27.4 4.2 0.8 0.3	maxlux 36.5 5.2 1.6 0.6

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
10.0911.A1V12	1X1.8W	2700K-5700K	Ra>80	234lm	1.8W	187lm	104lm/W	ON/OFF	10°/25°/40°/60°
10.0911.D1V12	1X0.3W	2700K-5700K	Ra>80	36lm	0.3W	27lm	90lm/W	ON/OFF	120°
10.0911.D3FV12	3X0.18W	RGB		25lm	0.6W	10lm	17lm/W	DMX512	120°

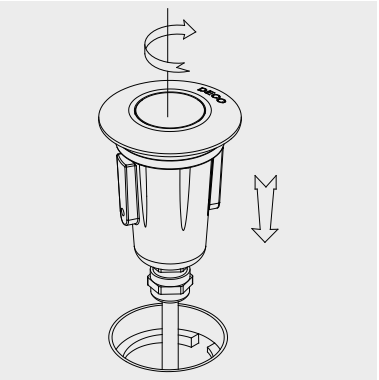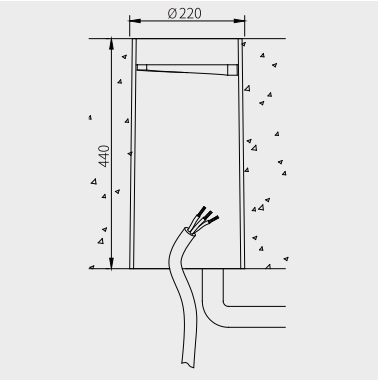Installation:





10.0921



材质: ADC12 铝合金灯体;
304/316 不锈钢紧固螺丝;
硅胶胶圈密封; PP 塑料预埋件;
铜镀镍防水接头;
10mm 钢化安全玻璃

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30°C~ +50°C;
可调角度范围: 水平方向: 0 ~ 350°;
垂直方向: 不可调

线材: 单色常亮: 1 条 0.5m 两芯线, 线径 7.0mm;
DMX512 控制: 1 条 0.5 米六芯线, 线径 7.5mm

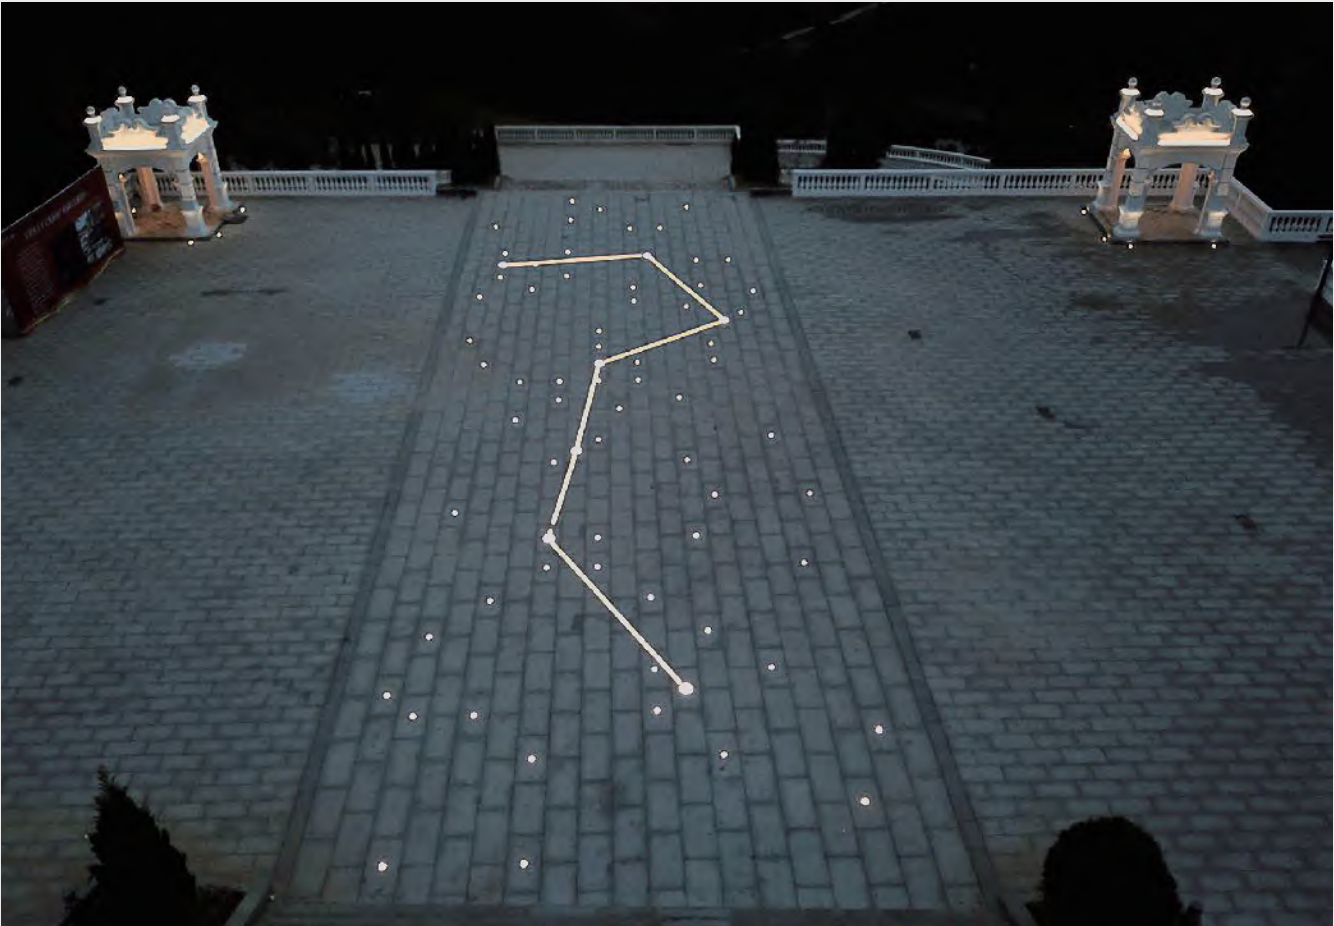
包装: 灯具净重: 0.35kg
内盒尺寸: 85x85x125mm
外箱尺寸: 445x270x270mm
包装容量: 30 灯 / 箱
包装毛重: 12kg

Material: ADC12 corrosion-resistant die-cast aluminum housing;
10mm clear safety glass;
Anti-aging waterproof silicone gasket;
304/316 stainless steel cover ring and external fasten screws
PP Plastic recessed box

Finishing: Stainless steel

Installation: Ambient temperature: -30°C~ +50°C ;
Vertical Rotation angle: 0 ~ 350°
Single Color: 1x 0.5m length 2-cores Ø7.0mm power supply cable;
DMX512 controllable: 1x 0.5m length 6-cores Ø7.5mm cable;
Nickled plated brass waterproof cable gland

Packaging: Net Weight: 0.35kg
Inner carton: 85x85x125mm
Outer carton: 445x270x270mm(30pcs/ctn)



45°C @ Ta 25°C



Anti-condensation kit



Optional Accessory
IP68 Junction box



10.0921
Aluminum cover for
Flush mounting

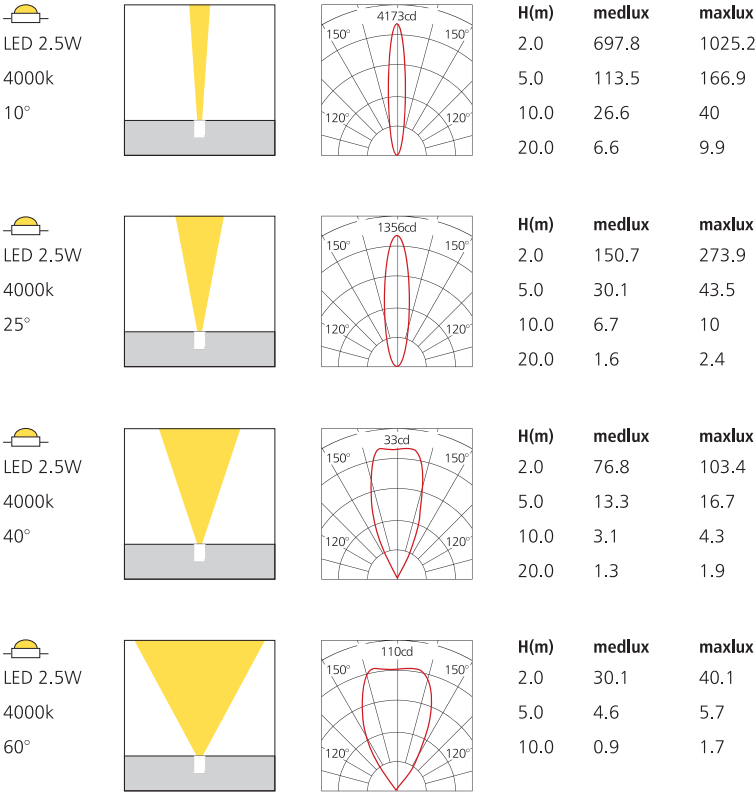
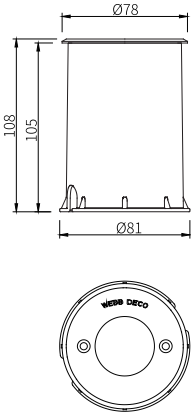


Flush mounting
Covered mounting





Compact size

10.0921



Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
10.0921.A1V12	1X2.5W	2700K-5700K	Ra>80	325lm	2.5W	260lm	104lm/W	ON/OFF	10°/25°/40°/60°/120°/30x65°
10.0921.D1V12	1X0.3W	2700K-5700K	Ra>80	36lm	0.3W	27lm	90lm/W	ON/OFF	120°
10.0921.D3FV12	3X0.18W	RGB		25lm	0.6W	10lm	17lm/W	DMX512	120°

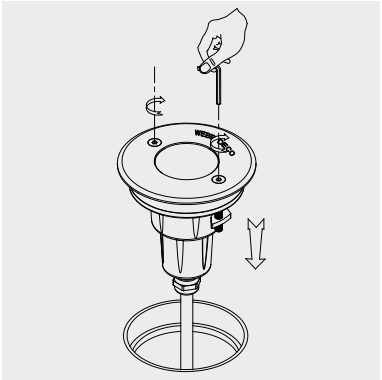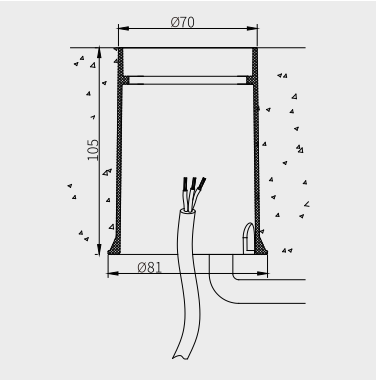Installation :





10.0912



材质: ADC12 铝合金灯体;
304/316 不锈钢面盖;
硅胶胶圈密封;
PP 塑料预埋件;
铜镀镍防水接头;
304# 不锈钢紧固螺丝;
12mm 钢化安全玻璃

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30°C~ +50°C;
可调角度范围: 不可调

线材: 单色常亮: 1 条 0.5 米两 / 三芯线, 线径 7.0mm;
DMX512 控制: 1 条 0.5 米两芯电源线, 线径 7.0mm;
2 条 0.5 米四芯信号线, 线径 6.0mm

包装: 灯具净重: 0.8g
内盒尺寸: 145x145x130mm
外箱尺寸: 450x305x285mm
包装容量: 12 灯 / 箱
包装毛重: 11kg

Material: ADC12 corrosion-resistant die-cast aluminum housing;
12mm clear safety glass;
Anti-aging waterproof silicone gasket;
304/316 stainless steel cover ring and external fasten screws;
PP Plastic recessed box

Finishing: Stainless steel

Installation: Ambient temperature: -30°C~ +50°C ;
Single Color: 1x 0.5m length 2/3-cores Ø7.0mm power supply cable;
DMX512 controllable: 1x 0.5m length 2-cores Ø7.0mm power supply cable & 2x 0.5m 4-cores Ø6.0mm data cables.
Nickled plated brass waterproof cable gland

Packaging: Net Weight: 0.8kg
Inner carton: 145x145x130mm
Outer carton: 450x305x285mm(12pcs/ctn)



40°C @ Ta 25°C



Anti-condensation kit



Optional Accessory
IP68 Junction box



10.0902
Aluminum cover for
Flush mounting

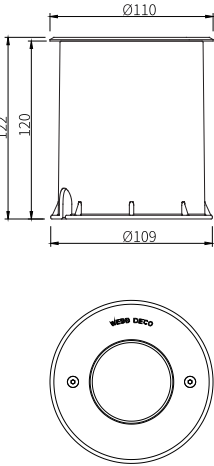










Flush mounting
Covered mounting



Individual gear
compartment



10.0912



 LED 6W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 1442.1 234.6 55.2 13.8	maxlux 2118.3 345 82.8 20.7
 LED 6W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 379.5 62.1 13.8 3.5	maxlux 565.8 89.7 20.7 5.5
 LED 6W 4000k 40°			H(m) 2.0 5.0 10.0	medlux 158.7 27.6 6.2	maxlux 213.9 34.5 9
 LED 6W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 62.1 8.4 2 0.5	maxlux 82.8 11.7 3.5 1.4

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
10.0912.A3V24	3X2W	2700K-5700K	Ra>80	780lm	6W	624lm	104lm/W	ON/OFF	10°/25°/40°/60°
10.0912.A3V220	3X2W	2700K-5700K	Ra>80	780lm	8W	624lm	78lm/W	ON/OFF	10°/25°/40°/60°
10.0912.D6V24	6X0.2W	2700K-5700K	Ra>80	150lm	1.2W	135lm	112.5lm/W	ON/OFF	120°
10.0912.D6FV24	6X0.2W	RGB		50lm	1.2W	45lm	38lm/W	DMX512	120°

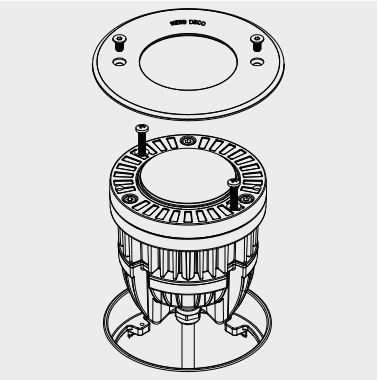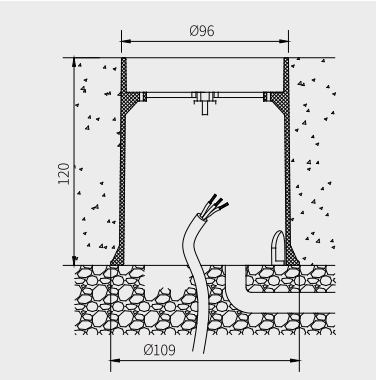Installation :





10.0913



材质: ADC12 铝合金灯体;
304/316 不锈钢面盖;
硅胶圈密封;
PP 塑料预埋件;
铜镀镍防水接头;
304# 不锈钢紧固螺丝;
15mm 钢化安全玻璃

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30°C~ +50°C;
可调角度范围: 不可调

线材: 单色常亮: 1 条 0.5 米两 / 三芯线, 线径 7.0mm;
DMX512 控制: 1 条 0.5 米两芯电源线, 线径 7.0mm;
2 条 0.5 米四芯信号线, 线径 6.0mm

包装: 灯具净重: 1.65kg
内盒尺寸: 180x180x195mm
外箱尺寸: 555x370x410mm
包装容量: 12 灯 / 箱
包装毛重: 21kg

Material: ADC12 corrosion-resistant die-cast aluminum housing;
15mmmm clear safety glass;
Anti-aging waterproof silicone gasket;
304/316 stainless steel cover ring and external fasten screws;
PP plastic recessed box

Finishing: Stainless steel

Installation: Ambient temperature: -30°C~ +50°C ;
Single Color: 1x 0.5m length 2/3-cores Ø7.0mm power supply cable;
DMX512 controllable: 1x 0.5m length 2-cores Ø7.0mm power supply cable & 2x 0.5m 4-cores Ø6.0mm data cables.
Nickled plated brass waterproof cable gland

Packaging: Net Weight: 1.65kg
Inner carton: 180x180x195mm
Outer carton: 555x370x410mm(12pcs/ctn)



45°C @ Ta 25°C



Anti-condensation kit



Optional Accessory
IP68 Junction box



10.0903
Aluminum cover for
Flush mounting

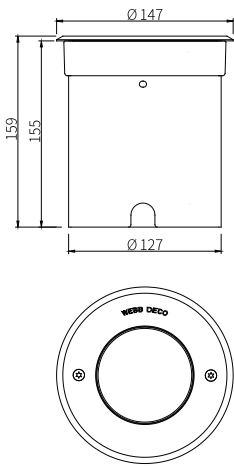










Flush mounting
Covered mounting



Individual gear
compartment



10.0913



 LED 9W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 2163.1 351.9 82.8 20.7	maxlux 3177.5 517.5 124.2 31
 LED 9W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 569.3 93.2 20.7 5.3	maxlux 848.7 134.6 31 8.3
 LED 9W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 238.1 41.4 9.3 4.2	maxlux 320.9 51.8 13.5 5.3
 LED 9W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 93.2 12.6 3 0.8	maxlux 124.1 17.6 5.3 2.1

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
10.0913.A6V24	6X1.5W	2700K-5700K	Ra>80	1170lm	9W	936lm	104lm/W	ON/OFF	10°/25°/40°/60°
10.0913.A6V220	6X1.5W	2700K-5700K	Ra>80	1170lm	11W	936lm	85lm/W	ON/OFF	10°/25°/40°/60°
10.0913.D12V24	12X0.2W	2700K-5700K	Ra>80	300lm	2.5W	225lm	90lm/W	ON/OFF	120°
10.0913.D12FV24	12X0.2W	RGB		105lm	2.5W	90lm	36lm/W	DMX512	120°

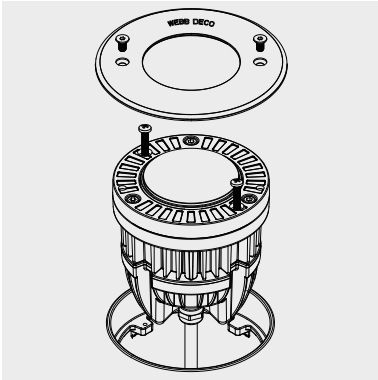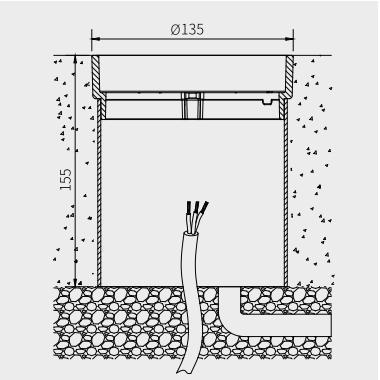Installation:





10.0913E



材质: ADC12 铝合金灯体;
304/316 不锈钢面盖;
硅胶胶圈密封;
PP 塑料预埋件;
铜镀镍防水接头;
304# 不锈钢紧固螺丝;
15mm 钢化安全玻璃

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30°C~ +50°C;

线材: 单色常亮: 1 条 0.5 米两 / 三芯线, 线径 7.5mm;
DMX512 控制: 1 条 0.5 米两 / 三芯电源线, 线径 7.5mm;
2 条 0.5 米四芯信号线, 线径 6.0mm

包装: 灯具净重: 2.5kg
内盒尺寸: 235x235x235mm
外箱尺寸: 485x485x495mm
包装容量: 8 灯 / 箱
包装毛重: 21.5kg

Material: ADC12 corrosion-resistant die-cast aluminum housing;
15mmmm clear safety glass;
Anti-aging waterproof silicone gasket;
304/316 stainless steel cover ring and external fasten screws;
PP plastic recessed box

Finishing: Stainless steel

Installation: Ambient temperature: -30°C~ +50°C ;
Single Color: 1x 0.5m length 2/3-cores Ø7.5mm power supply cable;
DMX512 controllable: 1x 0.5m length 2/3-cores Ø7.5mm power supply cable & 2x 0.5m 4-cores Ø6.0mm data cables.
Nickled plated brass waterproof cable gland

Packaging: Net Weight: 2.5kg
Inner carton: 235x235x235mm
Outer carton: 485x485x495mm(8pcs/ctn)



45°C @ Ta 25°C



Anti-condensation kit



Optional Accessory
IP68 Junction box



10.0913E
Aluminum cover for
Flush mounting

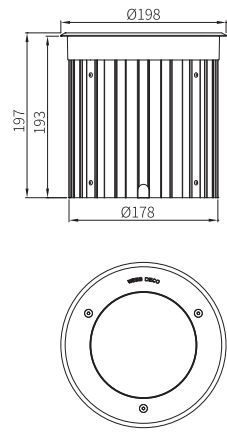










Flush mounting
Covered mounting



Individual gear
compartment



10.0913E



 LED 24W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 5768.4 936.4 220.8 55.2	maxlux 8473.2 1380 331.2 82.8
 LED 24W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 1518 248.4 55.2 14	maxlux 2263.2 358.8 82.8 22
 LED 24W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 634.8 110.4 24.8 11.2	maxlux 855.6 138 36 14
 LED 24W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 248.4 33.6 8 2	maxlux 331 46.8 14 5.6

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
10.0913E.A9V24	9X2W	2700K-5700K	Ra>80	2340lm	18W	1872lm	104lm/W	ON/OFF	10°/25°/40°/60°/20x65°
10.0913E.A9V220	9X2W	2700K-5700K	Ra>80	2340lm	21W	1872lm	89lm/W	ON/OFF	10°/25°/40°/60°/20x65°
10.0913E.A9FV24	9X2W	RGB		756lm	18W	605lm	33.6lm/W	DMX512	10°/25°/40°/60°/20x65°
10.0913E.A9FV220	9X2W	RGB		756lm	21W	605lm	28.5lm/W	DMX512	10°/25°/40°/60°/20x65°
10.0913E.A12V24	12X2W	2700K-5700K	Ra>80	3120lm	24W	2496lm	104lm/W	ON/OFF	10°/25°/40°/60°/20x65°
10.0913E.A12V220	12X2W	2700K-5700K	Ra>80	3120lm	28W	2496lm	89lm/W	ON/OFF	10°/25°/40°/60°/20x65°
10.0913E.A12SV24	12X2W	RGBW		1392lm	24W	1114lm	46.4lm/W	DMX512	10°/25°/40°/60°/20x65°
10.0913E.A12SV220	12X2W	RGBW		1392lm	28W	1114lm	39.8lm/W	DMX512	10°/25°/40°/60°/20x65°

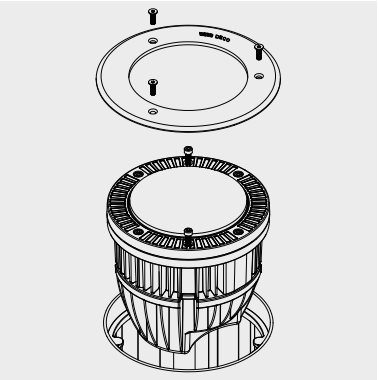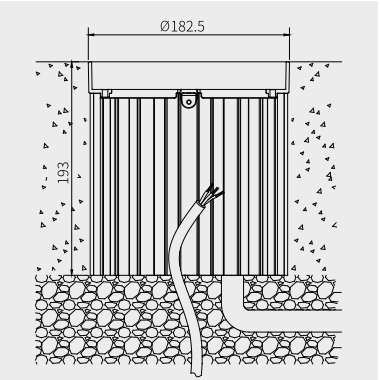Installation:





10.0914



材质: ADC12 铝合金灯体;
304/316 不锈钢面盖;
硅胶胶圈密封, PP 塑料预埋件;
铜镀镍防水接头;
304# 不锈钢紧固螺丝;
15mm 钢化安全玻璃

表面处理: 双层耐候耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30°C~ +50°C;
可调角度范围: 不可调

线材: 单色常亮: 1 条 0.8 米两 / 三芯线, 线径 7.5mm;
DMX512 控制: 1 条 0.8 米两 / 三芯电源线, 线径 7.5mm;
2 条 0.8 米四芯信号线, 线径 6.0mm

包装: 灯具净重: 5.1kg
内盒尺寸: 270x270x270mm
外箱尺寸: 555x555x290mm
包装容量: 4 灯 / 箱
包装毛重: 22kg

Material: ADC12 corrosion-resistant die-cast aluminum housing;
15mm clear safety glass;
Anti-aging waterproof silicone gasket;
304/316 stainless steel cover ring and external fasten screws;
PP plastic recessed box

Finishing: Stainless steel

Installation: Ambient temperature: -30°C~ +50°C ;
Single Color: 1x 0.8m length 2/3-cores Ø7.5mm power supply cable;
DMX512 controllable: 1x 0.8m length 2/3-cores Ø7.5mm power supply cable;
2x 0.8m 4-cores Ø6.0mm data cables.
Nickled plated brass waterproof cable gland

Packaging: Net Weight: 5.1kg
Inner carton: 270x270x270mm
Outer carton: 555x555x290mm(4pcs/ctn)



45°C @ Ta 25°C



2000Kg



Anti-condensation kit



Optional Accessory
IP68 Junction box



10.0904
Aluminum cover for
Flush mounting

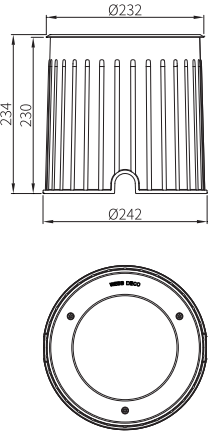










Flush mounting
Covered mounting



Individual gear
compartment



10.0914



 LED 36W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 8652.6 1404.6 331.2 82.8	maxlux 12709.8 2070 496.8 124.2
 LED 36W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 2277 372.6 82.8 21	maxlux 3394.8 538.2 124.2 33
 LED 36W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 952.2 132.5 37.2 16.8	maxlux 1283.4 207 54 21
 LED 36W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 372.6 50.4 12 3	maxlux 496.5 70.2 16.8 8.4

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
10.0914.D30V24	30X1W	2700K-5700K	Ra>80	3750lm	30W	2813lm	93.8lm/W	ON/OFF	10°/25°/40°/60°
10.0914.D30V220	30X1W	2700K-5700K	Ra>80	3750lm	34W	2813lm	82lm/W	ON/OFF	10°/25°/40°/60°
10.0914.A18V24	18X2W	2700K-5700K	Ra>80	4680lm	36W	3744lm	104lm/W	ON/OFF	10°/25°/40°/60°
10.0914.A18V220	18X2W	2700K-5700K	Ra>80	4680lm	41W	3744lm	90lm/W	ON/OFF	10°/25°/40°/60°
10.0914.A18FV24	18X2W	RGB		1512lm	36W	1210lm	33.6lm/W	DMX512	10°/25°/40°/60°
10.0914.A18FV220	18X2W	RGB		1512lm	41W	1210lm	29.2lm/W	DMX512	10°/25°/40°/60°
10.0914.A24SV24	24X1.67W	RGBW		2320lm	40W	1856lm	46.4lm/W	DMX512	10°/25°/40°/60°
10.0914.A24SV220	24X1.67W	RGBW		2320lm	45W	1856lm	41.2lm/W	DMX512	10°/25°/40°/60°

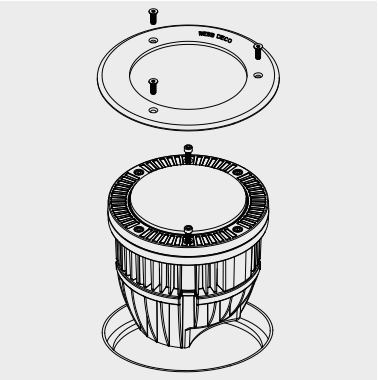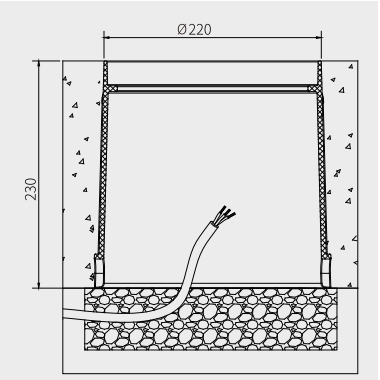Installation:





10.0915



材质: ADC12 铝合金灯体, 6063 铝型材预埋件;
304/316 不锈钢面盖;
硅胶胶圈密封;
铜镀镍防水接头;
304# 不锈钢紧固螺丝;
15mm 钢化安全玻璃

表面处理: 双层耐候耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30°C ~ +50°C;
可调角度范围: 不可调

线材: 单色常亮: 1 条 0.8 米两 / 三芯线, 线径 7.5mm;
DMX512 控制: 1 条 0.8 米两 / 三芯电源线, 线径 7.5mm;
2 条 0.8 米四芯信号线, 线径 6.0mm

包装: 灯具净重: 9.8kg
包装尺寸: 360x360x310mm
包装容量: 1 灯 / 箱
包装毛重: 11kg

Material: ADC12 corrosion-resistant die-cast aluminum housing;
15mmmm clear safety glass;
Anti-aging waterproof silicone gasket;
304/316 stainless steel cover ring and external fasten screws;
Extrusion aluminum recessed box

Finishing: Stainless steel

Installation: Ambient temperature: -30°C ~ +50°C ;
Single Color: 1x 0.8m length 2/3-cores Ø7.5mm power supply cable;
DMX512 controllable: 1x 0.8m length 2/3-cores Ø7.5mm power supply cable;
2x 0.8m 4-cores Ø6.0mm data cables.
Nickled plated brass waterproof cable gland

Packaging: Net Weight: 9.8kg
360x360x310mm(1pc/ctn)



45°C @ Ta 25°C



Anti-condensation kit



Optional Accessory
IP68 Junction box



10.0905
Aluminum cover for
Flush mounting

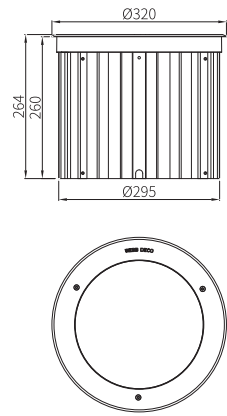










Flush mounting
Covered mounting



Individual gear
compartment



10.0915




 LED 50W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 10815.8 1755.8 414 103.5	maxlux 15887.3 2588 621 155.3
 LED 50W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 2846.3 465.8 103.5 26.3	maxlux 4243.5 672.8 155.4 41.3
 LED 50W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 1190.3 160 46.5 21	maxlux 1604.3 258.8 67.5 26.3
 LED 50W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 465.8 63 15 3.8	maxlux 620.6 87.8 21 10.5

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
10.0915.A36V24	36X1.38W	2700K-5700K	Ra>80	6500lm	50W	5200lm	104lm/W	ON/OFF	10°
10.0915.A36V220	36X1.38W	2700K-5700K	Ra>80	6500lm	55W	5200lm	94.5lm/W	ON/OFF	10°
10.0915.A36FV24	36X1.38W	RGB		2100lm	50W	1680lm	33.6lm/W	DMX512	10°/25°/40°/60°
10.0915.A36FV220	36X1.38W	RGB		2100lm	55W	1680lm	30.5lm/W	DMX512	10°/25°/40°/60°
10.0915.A48SV24	48X1W	RGBW		2900lm	50W	2320lm	46.4lm/W	DMX512	10°/25°/40°/60°
10.0915.A48SV220	48X1W	RGBW		2900lm	55W	2320lm	42.2lm/W	DMX512	10°/25°/40°/60°
10.0915.D48V24	48X1W	2700K-5700K	Ra>80	6250lm	50W	4688lm	94lm/W	ON/OFF	10°/25°/40°/60°
10.0915.D48V220	48X1W	2700K-5700K	Ra>80	6250lm	55W	4688lm	85.2lm/W	ON/OFF	10°/25°/40°/60°

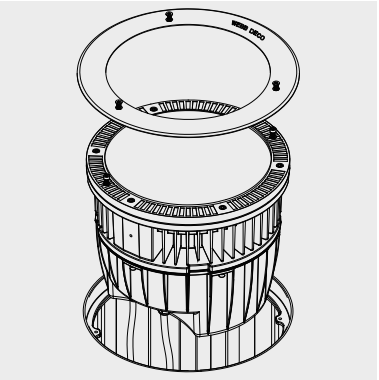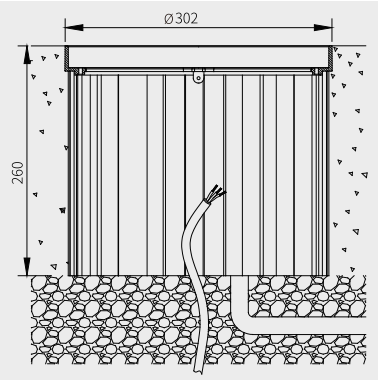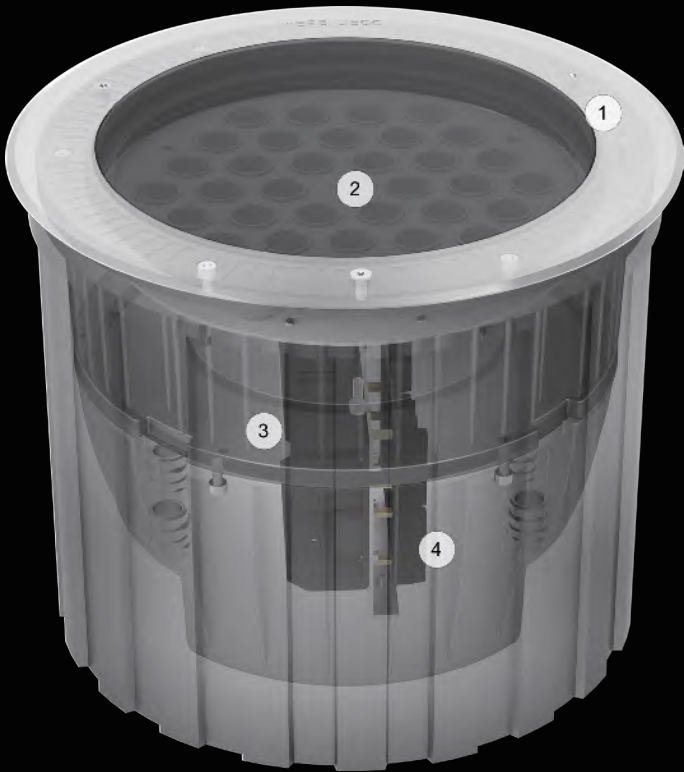
Installation:





- 1. 有 316 不锈钢面盖搭边安装与压铸铝面盖找平安装，适用不同安装环境要求
- 2. 深度防眩光装置
- 3. 独立密封的光源腔体
- 4. 独立的驱动电源空间，便于维护

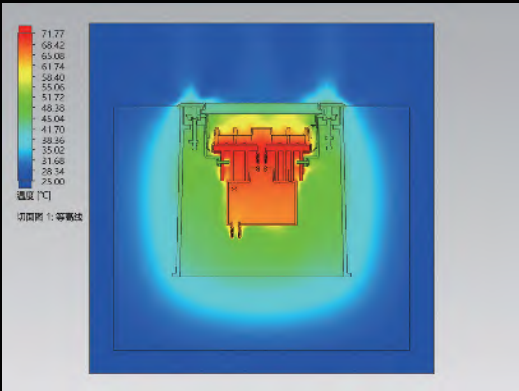
- 1.Options of 316 stainless steel covered mounted and die casting aluminum flush mounted.
- 2.Deep anti-glare louver.
- 3.Individual sealed lamp module compartment.
- 4.Individual compartment for LED driver, easy for maintaining.



优异的散热性能
Excellent heat dissipation



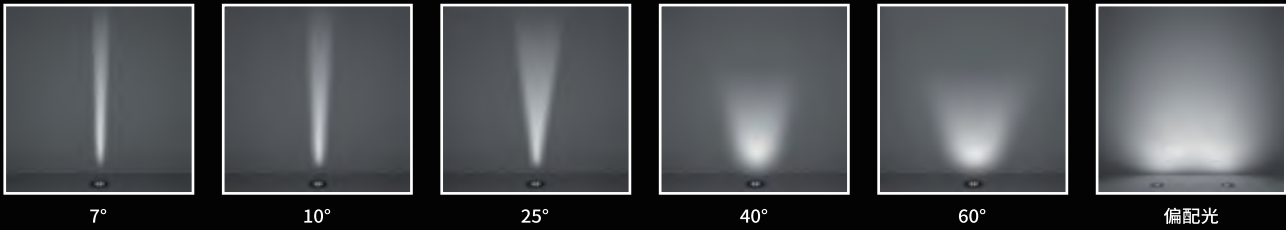玻璃表面温度约 40°C
Temperature of surface glass≈40°C



多种不同的配光角度选择
Different options of beam angle light distribution



获得专利的灯具表面可调节角度设计
Patented design of EASY TITLED device on surface trim



圆形、方形埋地灯系列可承载 2000 千克静态压力
Static pressure loading ≥ 2000kgs for Round and Square in ground luminaire


线形埋地灯系列可承载 500 千克静态压力
Static pressure loading ≥ 500kgs for Linear in ground luminaires



在外接电缆处配置专利设计的防吸水器，防止水气从电缆处浸入灯体
Patented design of anti-condensation device attached to the external cable to stop humidity from power connection



10.0924



- 材质：

ADC12 铝合金灯体；
PP 塑料预埋件；
304/316 不锈钢面盖；
硅胶圈密封；
铜镀镍防水接头；
304# 不锈钢紧固螺丝；
15mm 钢化安全玻璃
- 表面处理：

双层耐侯耐腐蚀静电粉末喷涂
- 安装：

适应环境温度：-30℃～ +50℃；
可调角度范围：水平方向：0 ～ 350°
垂直方向：0-15°
- 线材：

单色常亮：1 条 1 米两 / 三芯线，线径 7.5mm；
DMX512 控制：1 条 0.8 米两 / 三芯电源线，线径 7.5mm；
2 条 0.8 米四芯信号线，线径 6.0mm
- 包装：

灯具净重：5.6kg
内盒尺寸：270x270x230mm
外箱尺寸：555x555x250mm
包装容量：4 灯 / 箱
包装毛重：28kg

- Material:

ADC12 corrosioin-resistant die-cast aluminum housing;
15mm clear safety glass;
Anti-aging waterproof silicone gasket;
304/316 stainless steel cover ring and external fasten screws.
PP plastic recessed box
- Finishing:



Stainless steel
- Installation:

Ambient temperature: -30℃～ +50℃ ;
Tilttable: 0 ～ 15°
Vertical Rotation angle: 0 ～ 350°
Single Color: 1x 0.8m length 2/3-cores Ø7.5mm power supply cable;
DMX512 controllable: 1x 0.8m length 2/3-cores Ø7.5mm power supply cable & 2x 0.8m 4-cores Ø6.0mm data cables.
Nickled plated brass waterproof cable gland
- Packaging:

Net Weight: 5.6g
Inner carton: 270x270x230mm
Outer carton: 555x555x250mm(4pcs/ctn)



45℃ @ Ta 25℃



Anti-condensation kit



Optional Accessory
IP68 Junction box



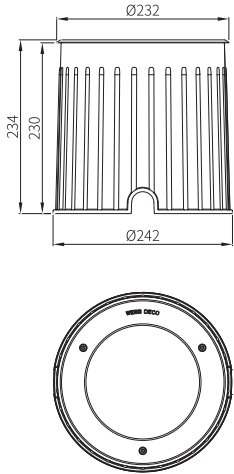
Easy Tilt device















Easy Tilt device




10.0924



 LED 24W 4000k 7°			H(m) 2.0 5.0 10.0 20.0	medlux 8308 1324.8 331.2 82.8	maxlux 13634 2180.4 552 158
 LED 24W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 5768.4 936.4 220.8 55.2	maxlux 8473.2 1380 331.2 82.8
 LED 24W 4000k 15°			H(m) 2.0 5.0 10.0 20.0	medlux 3607.3 576.9 144.5 35.8	maxlux 5253.2 840.9 209.7 53.3
 LED 24W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 1518 248.4 55.2 14	maxlux 2263.2 358.8 82.8 22
 LED 24W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 634.8 110.4 24.8 11.2	maxlux 855.6 138 36 14
 LED 24W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 248.4 33.6 8 2	maxlux 331 46.8 14 5.6


Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
10.0924.D18V24	18X1W	2700K-5700K	Ra>80	2250lm	18W	1688lm	94lm/W	ON/OFF	15°/25°/40°/60°
10.0924.D18V220	18X1W	2700K-5700K	Ra>80	2250lm	22W	1688lm	76lm/W	ON/OFF	15°/25°/40°/60°
10.0924.D18CV24	18X1W	2700K-5700K	Ra>80	2250lm	18W	1688lm	94lm/W	DMX512	15°/25°/40°/60°
10.0924.D18CV220	18X1W	2700K-5700K	Ra>80	2250lm	22W	1688lm	76lm/W	DMX512	15°/25°/40°/60°
10.0924.A18V24	18X1.5W	2700K-5700K	Ra>80	3120lm	24W	2496lm	104lm/W	ON/OFF	7°/10°/25°/40°/60°
10.0924.A18V220	18X1.5W	2700K-5700K	Ra>80	3120lm	29W	2496lm	86lm/W	ON/OFF	7°/10°/25°/40°/60°
10.0924.A18FV24	18X1.5W	RGB		1008lm	24W	806lm	33.6lm/W	DMX512	7°/10°/25°/40°/60°
10.0924.A18FV220	18X1.5W	RGB		1008lm	29W	806lm	27.7lm/W	DMX512	7°/10°/25°/40°/60°
10.0924.B1V220	1X18W	2700K-5700K	Ra>80	2520lm	22W	2016lm	91lm/W	ON/OFF	12°/25°/40°

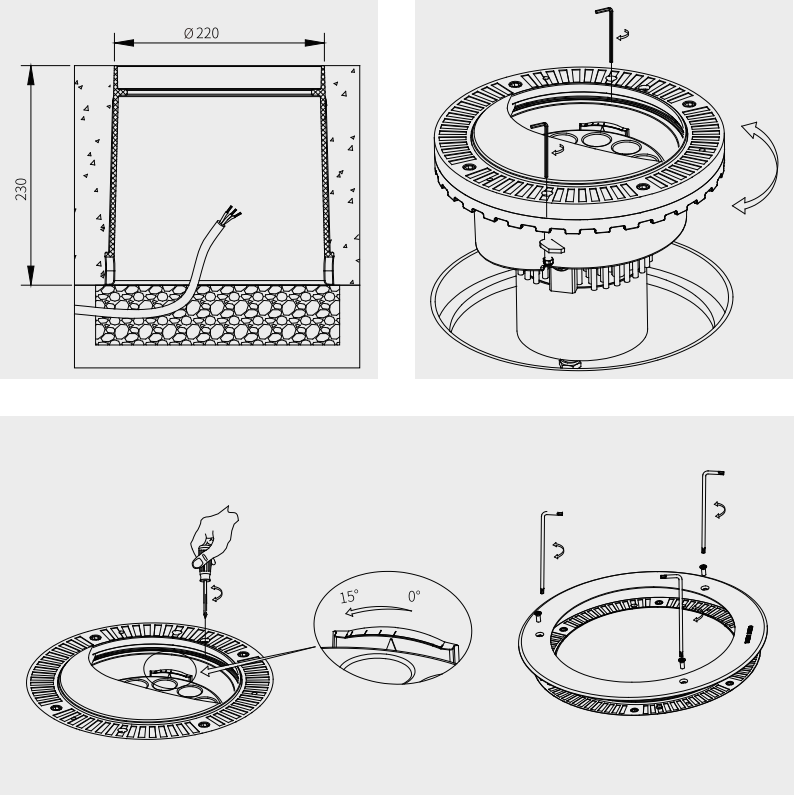Installation :





10.0925



材质: ADC12 铝合金灯体, PP 塑料预埋件;
304/316 不锈钢面盖;
硅胶胶圈密封;
铜镀镍防水接头;
304# 不锈钢紧固螺丝;
15mm 钢化安全玻璃

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30°C ~ +50°C;
可调角度范围: 水平方向: 0 ~ 350°;
垂直方向: 0-15°

线材: 单色常亮: 1 条 0.8 米两 / 三芯线, 线径 7.5mm;
DMX512 控制: 1 条 0.8 米两 / 三芯电源线, 线径 7.5mm;
2 条 0.8 米四芯信号线, 线径 6.0mm

包装: 灯具净重: 9.3kg
包装尺寸: 360x360x250mm
包装容量: 1 灯 / 箱
包装毛重: 10.5kg

Material: ADC12 corrosion-resistant die-cast aluminum housing;
15mmmm clear safety glass;
Anti-aging waterproof silicone gasket;
304/316 stainless steel cover ring and external fasten screws.
PP plastic box



Finishing: Stainless steel

Installation: Ambient temperature: -30°C ~ +50°C ;
Tilttable: 0 ~ 15°
Vertical Rotation angle: 0 ~ 350°
Single Color: 1x 0.8m length 2/3-cores Ø7.5mm power supply cable;
DMX512 controllable: 1x 0.8m length 2/3-cores Ø7.5mm power supply cable & 2x 0.8m 4-cores Ø6.0mm data cables.
Nickled plated brass waterproof cable gland

Packaging: Net Weight: 9.3kg
360x360x250mm(1pc/ctn)



45°C @ Ta 25°C



Anti-condensation kit



Optional Accessory
IP68 Junction box



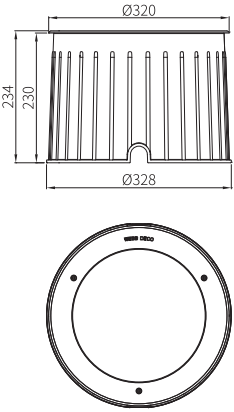
Easy Tilt device















Easy Tilt device




10.0925



 LED 40W 4000k 7°			H(m) 2.0 5.0 10.0 20.0	medlux 13708.2 2185.9 546.5 136.6	maxlux 22496.1 3597.7 910.8 260.7
 LED 40W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 9517.9 1541.1 364.3 91.1	maxlux 13980.8 2277 546.5 136.6
 LED 40W 4000k 15°			H(m) 2.0 5.0 10.0 20.0	medlux 5952.1 951.8 238.4 59.2	maxlux 8667.8 1387.4 346.1 88
 LED 40W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 2504.7 409.8 91.1 23.1	maxlux 3734.3 592 136.6 36.3
 LED 40W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 1047.4 145.8 40.9 18.5	maxlux 1411.7 227.8 59.4 23.1
 LED 40W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 409.9 55.4 13.2 3.3	maxlux 546.1 77.2 18.5 9.2

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
10.0925.A36V24	36X1.1W	2700K-5700K	Ra>80	5200lm	40W	4160lm	104lm/W	ON/OFF	7°/10°/25°/40°/60°
10.0925.A36CV24	36X1.25W	2700K-5700K	Ra>80	5850lm	46W	4680lm	103lm/W	DMX512	7°/10°/25°/40°/60°
10.0925.A36FV24	36X1.25W	RGB		1890lm	46W	1512lm	32.8lm/W	DMX512	7°/10°/25°/40°/60°
10.0925.A36SV36	36X1.25W	RGBW		2610lm	46W	2088lm	45.4lm/W	DMX512	7°/10°/25°/40°/60°
10.0925.A36V220	36X1.1W	2700K-5700K	Ra>80	5200lm	46W	4160lm	90.4lm/W	ON/OFF	7°/10°/25°/40°/60°
10.0925.A36CV220	36X1.25W	2700K-5700K	Ra>80	5850lm	53W	4680lm	88.3lm/W	DMX512	7°/10°/25°/40°/60°
10.0925.A36FV220	36X1.25W	RGB		1890lm	53W	1512lm	28.5lm/W	DMX512	7°/10°/25°/40°/60°
10.0925.A36SV220	36X1.25W	RGBW		2610lm	53W	2088lm	39.4lm/W	DMX512	7°/10°/25°/40°/60°
10.0925.B1V220	1X45W	2700K-5700K	Ra>80	6300lm	50W	5040lm	101lm/W	ON/OFF	12°/24°/38°

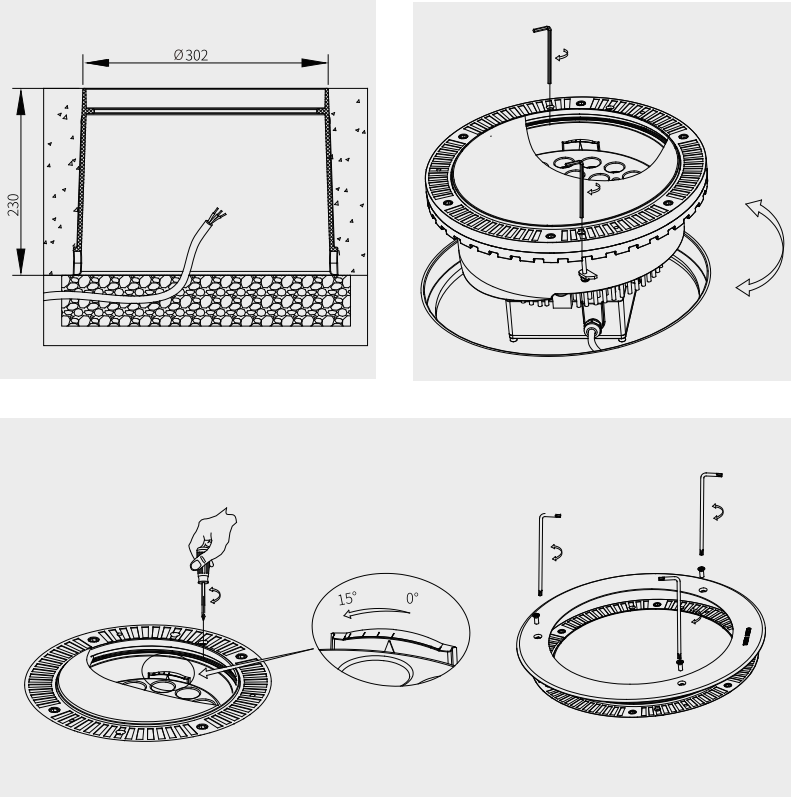Installation:





10.0734



材质: ADC12 铝合金压铸灯体;
304/316 不锈钢面盖;
硅胶胶圈密封;
PP 塑料预埋件;
铜镀镍防水接头;
304# 不锈钢紧固螺丝;
15mm 钢化安全玻璃

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30°C~ +50°C;
可调角度范围: 不可调

线材: 单色常亮: 1 条 0.8 米三芯线, 线径 7.5mm;
DMX512 控制: 1 条 0.8 米三芯电源线, 线径 7.5mm;
2 条 0.8 米四芯公母接头线, 线径 6mm

包装: 灯具净重: 6.5kg
包装尺寸: 270x270x300mm
包装容量: 1 灯 / 箱
包装毛重: 7kg

Material: ADC12 corrision-resistant die-cast aluminum housing;
15mm clear safety glass;
Anti-aging waterproof silicone gasket;
304/316 stainless steel cover ring and external fasten screws;
PP Plastic recessed box

Finishing: Stainless steel

Installation: Ambient temperature: -30°C~ +50°C ;
Single Color: 1x 0.8m length 3-cores Ø7.5mm power supply cable;
DMX512 controllable: 1x 0.8m length 3-cores Ø7.5mm power supply cable;
2x 0.8m 4-cores Ø6.0mm data cables.
Nickled plated brass waterproof cable gland

Packaging: Net Weight: 6.5kg
270x270x300mm(1pc/ctn)



45°C @ Ta 25°C



Anti-condensation kit



Optional Accessory
IP68 Junction box



Optional Symmetric
reflector

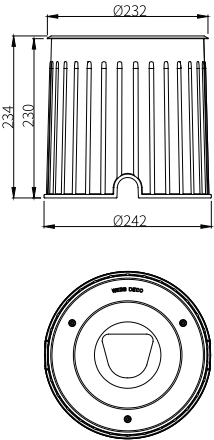
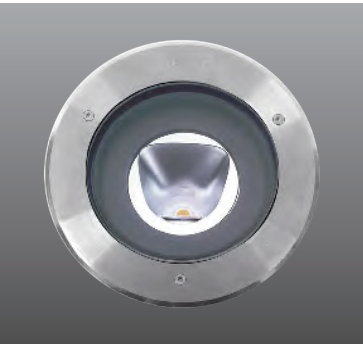










Unique Asymmetric
reflector



Individual gear
compartment



10.0734



 LED 26W 4000k 50X90°			H(m) 2.0 5.0 10.0 20.0	medlux 313 71.7 19 8.5	maxlux 768 192 50 20
 LED 26W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 1518 248.4 55.2 14	maxlux 2263.2 358.8 82.8 22
 LED 26W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 634.8 110.4 24.8 11.2	maxlux 855.6 138 36 14
 LED 26W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 248.4 33.6 8 2	maxlux 331 46.8 14 5.6

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
10.0734.B1V220	1X20W	2700K-5700K	Ra>80	2800lm	24W	2000lm	83lm/W	ON/OFF	Asymmetric 50x90°
10.0734.B1V220	1X20W	2700K-5700K	Ra>80	2800lm	24W	2240lm	93lm/W	ON/OFF	12°/25°/40°
10.0734.B1CV220	1X20W	2700K-5700K	Ra>80	2800lm	24W	2000lm	83lm/W	DMX512	Asymmetric 50x90°
10.0734.B1CV220	1X20W	2700K-5700K	Ra>80	2800lm	24W	2240lm	93lm/W	DMX512	12°/25°/40°

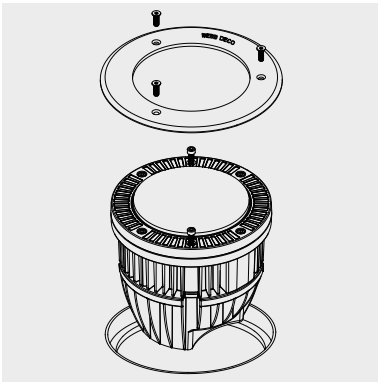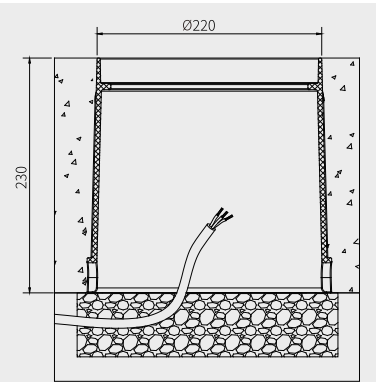Installation:





10.0808



材质: ADC12 铝合金灯体, 6063 铝型材预埋件;
304 不锈钢紧固螺丝;
硅胶圈密封;
铜镀镍防水接头;
3mm 抗紫外线 PC 胶罩

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30°C~ +50°C;
可调角度范围: 不可调

线材: 单色常亮: 1 条 0.5m 两芯 / 三芯线, 线径 7.5mm

包装: 灯具净重: 3.6kg
内箱尺寸: 250x250x210mm
外箱尺寸: 515x515x445mm
包装数量: 8 灯 / 箱
包装毛重: 30kg

Material: ADC12 corrosion-resistant die-cast aluminum housing;
3mm thickness PC diffuser;
Anti-aging waterproof silicone gasket;
304/316 stainless steel external screws;
Extrusion aluminum recessed box

Finishing: Double layers of DUPONT UV-resistant polyester powder coating

Installation: Ambient temperature: -30°C~ +50°C ;
Single Color: 1x 0.5m length 2/3-cores Ø7.5mm power supply cable;
Nickled plated brass waterproof cable gland

Packaging: Net Weight: 3.6kg
Inner carton: 250x250x210mm
Outer carton: 515x515x445mm(8pcs/ctn)



45°C @ Ta 25°C



Anti-condensation kit



Optional Accessory
IP68 Junction box



10.0808S

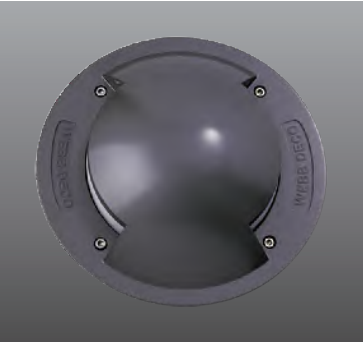









10.0808F



10.0808N


10.0808



 10.0808S A2V12 LED 12W 4000k			H(m) 2.0 5.0 10.0 15.00	medlux 55 9 2 0.5	maxlux 82 13 3 0.8
 10.0808D A4V24 LED 12W 4000k			H(m) 2.0 5.0 10.0 15.00	medlux 165 27 6 1.5	maxlux 246 39 9 2.4
 10.0808F A8V24 LED 12W 4000k			H(m) 2.0 5.0 10.0 15.00	medlux 660 108 24 6	maxlux 992 156 36 9.6
 10.0808N A8V24 LED 12W 4000k			H(m) 2.0 5.0 10.0 15.00	medlux 660 108 24 6	maxlux 992 156 36 9.6


Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
10.0808S.A2V12	2X1.5W	2200K-5700K	Ra>80	390lm	3W	312lm	104lm/W	ON/OFF	Single Window
10.0808.A2V220	2X1.5W	2200K-5700K	Ra>80	390lm	4W	312lm	78lm/W	ON/OFF	Single Window
10.0808D.A4V12	4X1.5W	2200K-5700K	Ra>80	780lm	6W	624lm	104lm/W	ON/OFF	Twin Window
10.0808D.A4V220	4X1.5W	2200K-5700K	Ra>80	780lm	8W	624lm	78lm/W	ON/OFF	Twin Window
10.0808F.A8V24	8X1.5W	2200K-5700K	Ra>80	1560lm	12W	1248lm	104lm/W	ON/OFF	Four Window
10.0808F.A8V220	8X1.5W	2200K-5700K	Ra>80	1560lm	15W	1248lm	83.2lm/W	ON/OFF	Four Window
10.0808N.A8V24	8X1.5W	2200K-5700K	Ra>80	1560lm	12W	1248lm	104lm/W	ON/OFF	Multiple Window
10.0808N.A8V220	8X1.5W	2200K-5700K	Ra>80	1560lm	15W	1248lm	83.2lm/W	ON/OFF	Multiple Window

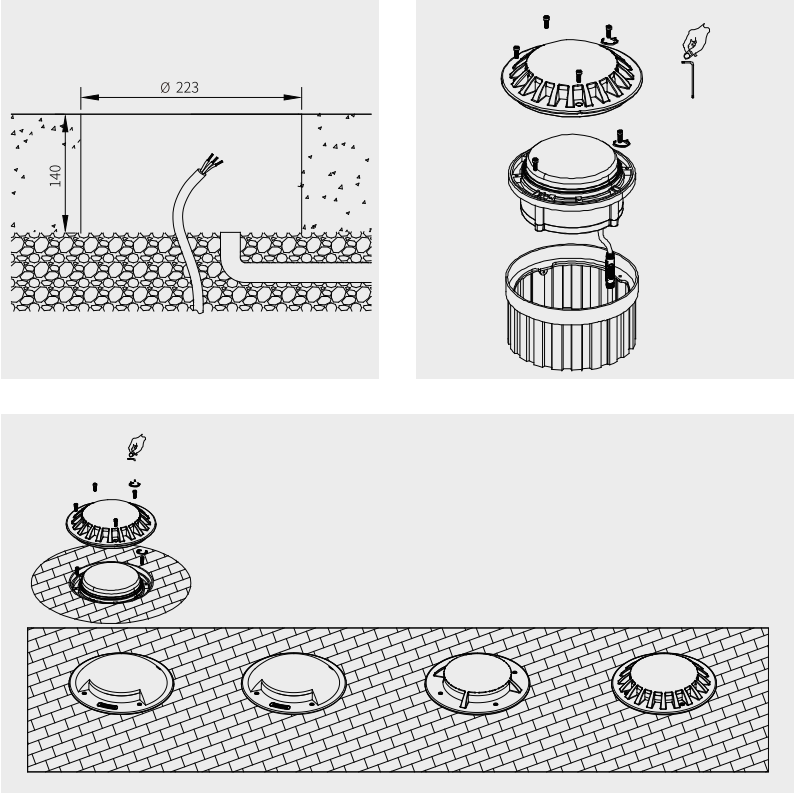Installation :





10.0614



- 材质：

6063 铝型材灯体、预埋件，ADC12 铝合金端盖；
304/316 不锈钢面盖；
硅胶胶圈密封；
铜镀镍防水接头；
304# 不锈钢紧固螺丝；
15mm 钢化安全玻璃
- 表面处理：

双层耐侯耐腐蚀静电粉末喷涂
- 安装：

适应环境温度：-30℃～+50℃；
可调角度范围：垂直方向 0-20°；
水平方向不可调
- 线材：

单色常亮：1 条 0.8 米三芯线，线径 7.5mm；
DMX512 控制：1 条 0.8 米三芯电源线，线径 7.5mm；
2 条 0.8 米四芯公母接头线，线径 6mm
- 包装：

灯具净重：11.0kg
包装尺寸：360x360x210mm
包装容量：1 灯 / 箱
包装毛重：12.4kg

* 包装以 10.0614.A36V220 为准，仅供参考。

- Material:

Corrosion-resistant aluminum housing
15mm clear safety glass;
Anti-aging waterproof silicone gasket;
304/316 stainless steel cover ring and external fasten screws
Extrusion aluminum recessed box
- Finishing:


Stainless steel
- Installation:

Ambient temperature: -30℃～+50℃ ;
Tilttable: 0°～ 20°
Single Color: 1x 0.8m length 3-cores Ø7.5mm power supply cable;
DMX512 controllable: 1x 0.8m length 3-cores Ø7.5mm power supply cable;
2x 0.8m 4-cores Ø6.0mm data cables.
Nickled plated brass waterproof cable gland
- Packaging:

Net Weight: 11.0kg
360x360x210mm(1pc/ctn)



45℃ @ Ta 25℃



Anti-condensation kit



Shorter Height



Optional Accessory
IP68 Junction box



Anti-glare louver

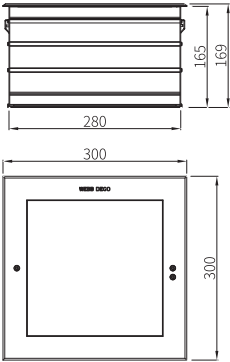
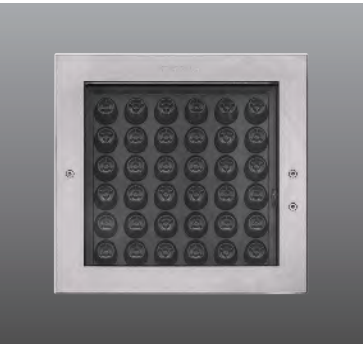









Easy Tilt device



Easy Tilt device



10.0614



 LED 50W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 10815.8 1755.8 414 103.5	maxlux 15887.3 2588 621 155.3
 LED 50W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 2846.3 465.8 103.5 26.3	maxlux 4243.5 672.8 155.4 41.3
 LED 50W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 1190.3 160 46.5 21	maxlux 1604.3 258.8 67.5 26.3
 LED 50W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 465.8 63 15 3.8	maxlux 620.6 87.8 21 10.5

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
10.0614.A36V220	36X1.25W	2200K-5700K	Ra>80	5850lm	50W	4680lm	93.6lm/W	ON/OFF	10°/25°/40°/60°
10.0614.A36CV220	36X1.39W	2200K-5700K	Ra>80	6500lm	55W	5200lm	94.5lm/W	DMX512	10°/25°/40°/60°
10.0614.A36FV220	36X1.39W	RGB		2100lm	55W	1680lm	30.5lm/W	DMX512	10°/25°/40°/60°
10.0614.E36SV220	36X1.39W	RGBW		2850lm	55W	2150lm	39lm/W	DMX512	25°/40°/60°

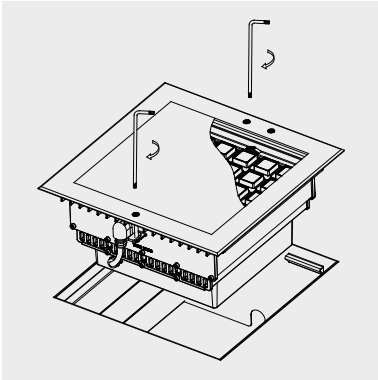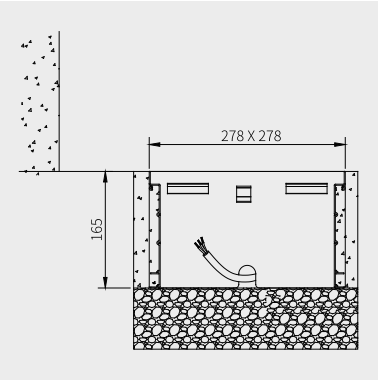Installation:





10.T029



材质: ADC12 铝合金灯体，预埋件；
304/316 不锈钢面盖；
硅胶胶圈密封；
铜镀镍防水接头；
304# 不锈钢紧固螺丝；
12mm 钢化安全玻璃

表面处理: 双层耐候耐腐蚀静电粉末喷涂

安装: 适应环境温度：-30℃～ +45℃；
可调角度范围：不可调

线材: 单色常亮： 1 条 0.8 米三芯线，线径 7.5mm；
DMX512 控制： 1 条 0.8 米两 / 三芯电源线，线径 7.5mm；
2 条 0.8 米四芯信号线，线径 6.0mm

包装: 灯具净重： 15kg
包装尺寸： 395x395x220mm
包装容量： 1 灯 / 箱
包装毛重： 15.5kg

Material: ADC12 corrosion-resistant die-cast aluminum housing;
12mm clear safety glass;
Anti-aging waterproof silicone gasket;
304/316 stainless steel cover ring and external fasten screws.
die-cast aluminum recessed box

Finishing: Stainless steel

Installation: Ambient temperature: -30℃～ +45℃ ;
Single Color: 1x 0.8m length 2/3-cores Ø7.5mm power supply cable;
DMX512 controllable: 2x 0.8m length 2/3-cores Ø7.5mm power supply cable & 2x 0.8m 4-cores Ø6.0mm data cables.
Nickled plated brass waterproof cable gland

Packaging: Net Weight: 15kg
395x395x220mm(1pc/ctn)



Optimised system power



One-piece heat sink



50°C @ Ta 25°C



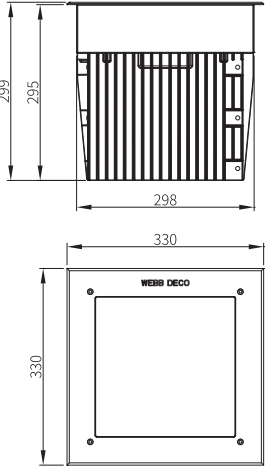
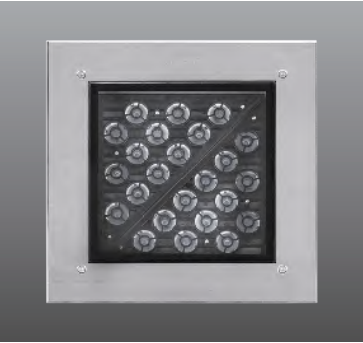
Anti-condensation kit





Optional Accessory
IP68 Junction box



10.T029





LED 100W
4000k
5°





H(m)	medlux	maxlux
2.0	77262	160062
5.0	12358	25616.2
10.0	3059.7	6401.5
20.0	771	1599

LED 100W
4000k
15°



H(m)	medlux	maxlux
2.0	13527.5	19699
5.0	2163.2	3153.3
10.0	541.8	786.5
20.0	134.5	200




LED 100W
4000k
15+45°



H(m)	medlux	maxlux
2.0	5692.5	8487
5.0	931.5	1345.5
10.0	207	355.5
20.0	52.5	82.5


Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
10.T029.A24V220	24X3.7W	2700K-5700K	Ra>80	11700lm	100W	7200lm	72lm/W	ON/OFF	5°/15°(15+45°2:1)
10.T029.A36V220	36X3W	2700K-5700K	Ra>80	15000lm	120W	9500lm	79lm/W	ON/OFF	5°/15°(15+45°2:1)
10.T029.E24FV220	24X6W	RGB		6050lm	160W	3750lm	23.5lm/W	DMX512	10°/15°(15+45°2:1)
10.T029.E24SV220	24X6W	RGBW		8700lm	160W	5300lm	32.5lm/W	DMX512	10°/15°(15+45°2:1)

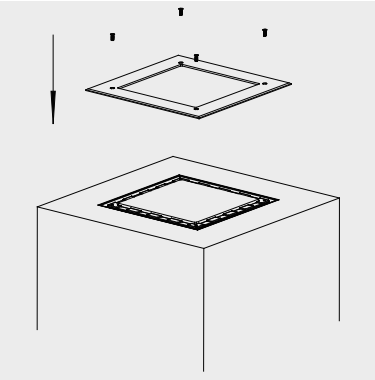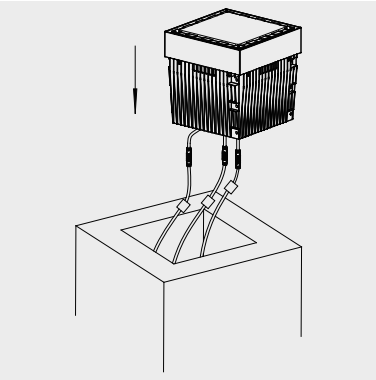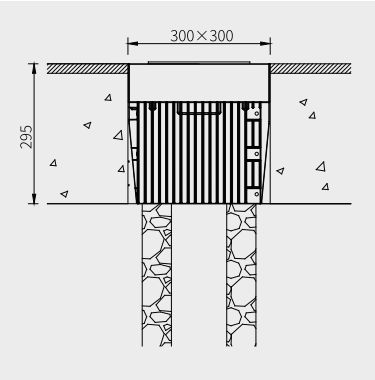Installation:





10.0942



材质: ADC12 铝合金灯体;
304# 不锈钢紧固螺丝;
硅胶胶圈密封;
PP 塑料预埋件;
铜镀镍防水接头;
6mm 钢化安全玻璃

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30°C~ +50°C;
可调角度范围: 不可调

线材: 单色常亮: 1 条 0.5 米两 / 三芯线, 线径 7.5mm;
DMX512 控制: 1 条 0.5 米两 / 三芯电源线, 线径 7.5mm;
2 条 0.5 米四芯公母接头线, 线径 6.0mm

包装: 灯具净重: 3.8kg
内箱尺寸: 445x190x185mm
外箱尺寸: 585x455x385mm
包装容量: 6 灯 / 箱
包装毛重: 24kg

Material: ADC12 corrosion-resistant die-cast aluminum housing;
6mm clear safety glass;
Anti-aging waterproof silicone gasket;
304/316 stainless steel external fasten screws.
PP plastic recessed box

Finishing: Double layers of DUPONT UV-resistant polyester powder coating

Installation: Ambient temperature: -30°C~ +50°C ;
Single Color: 1x 0.5m length 2/3-cores Ø7.5mm power supply cable;
DMX512 controllable: 1x 0.5m length 2/3-cores Ø7.5mm power supply cable & 2x 0.5m 4-cores Ø6.0mm data cables with waterproof connector.
Nickled plated brass waterproof cable gland

Packaging: Net Weight: 3.8kg
Inner carton: 445x190x185mm
Outer carton: 585x455x385mm(6pcs/ctn)



50°C @ Ta 25°C



Anti-condensation kit





Optional Accessory
IP68 Junction box



10.0942





LED 36W
4000k
15°






H(m)	medlux	maxlux
2.0	5411	7879.8
5.0	865.3	1261.3
10.0	216.7	314.6
20.0	53.8	80

LED 36W
4000k
15+45°







H(m)	medlux	maxlux
2.0	2277	3394.8
5.0	372.6	538.2
10.0	82.8	124.2
20.0	21	33



Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
10.0942.D24V24	24X1.1W	2200K-5700K	Ra>80	3300lm	26W	2000lm	76lm/W	ON/OFF	15°(15+45°2:1)
10.0942.D30V220	30X1.05W	2200K-5700K	Ra>80	3930lm	36W	2400lm	66lm/W	ON/OFF	15°(15+45°2:1)
10.0942.D30CV220	30X1.05W	2200K-5700K	Ra>80	3930lm	36W	2400lm	66lm/W	DMX512	15°(15+45°2:1)
10.0942.A18FV24	18X2W	RGB		1400lm	36W	900lm	25lm/W	DMX512	15°(15+45°2:1)
10.0942.A24FV36	24X1.5W	RGB		1550lm	36W	990lm	27lm/W	DMX512	15°(15+45°2:1)
10.0942.A18FV220	18X2W	RGB		1400lm	40W	900lm	22.5lm/W	DMX512	15°(15+45°2:1)
10.0942.A24FV220	24X1.5W	RGB		1550lm	40W	990lm	24.7lm/W	DMX512	15°(15+45°2:1)
10.0942.A24SV220	24X1.5W	RGBW		2150lm	40W	1300lm	32.5lm/W	DMX512	15°(15+45°2:1)

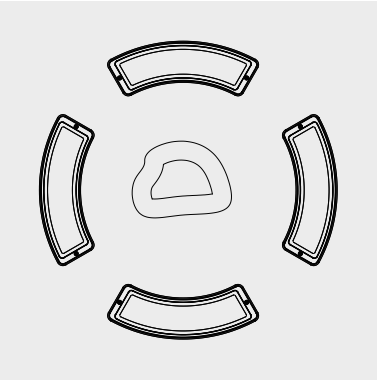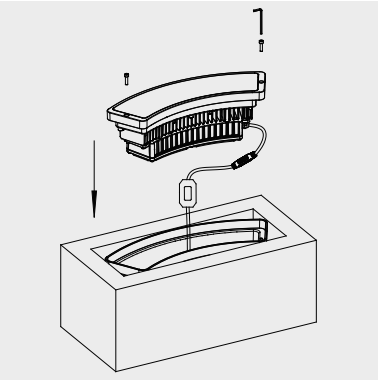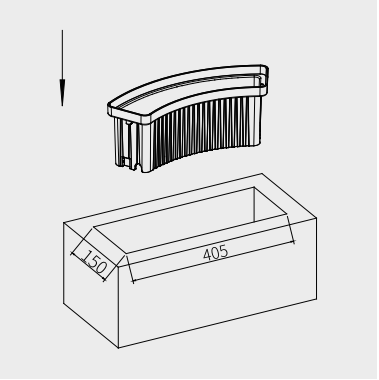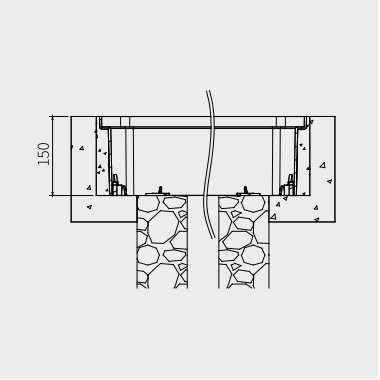Installation:






南京·胜利广场
Victory Square · Nanjing



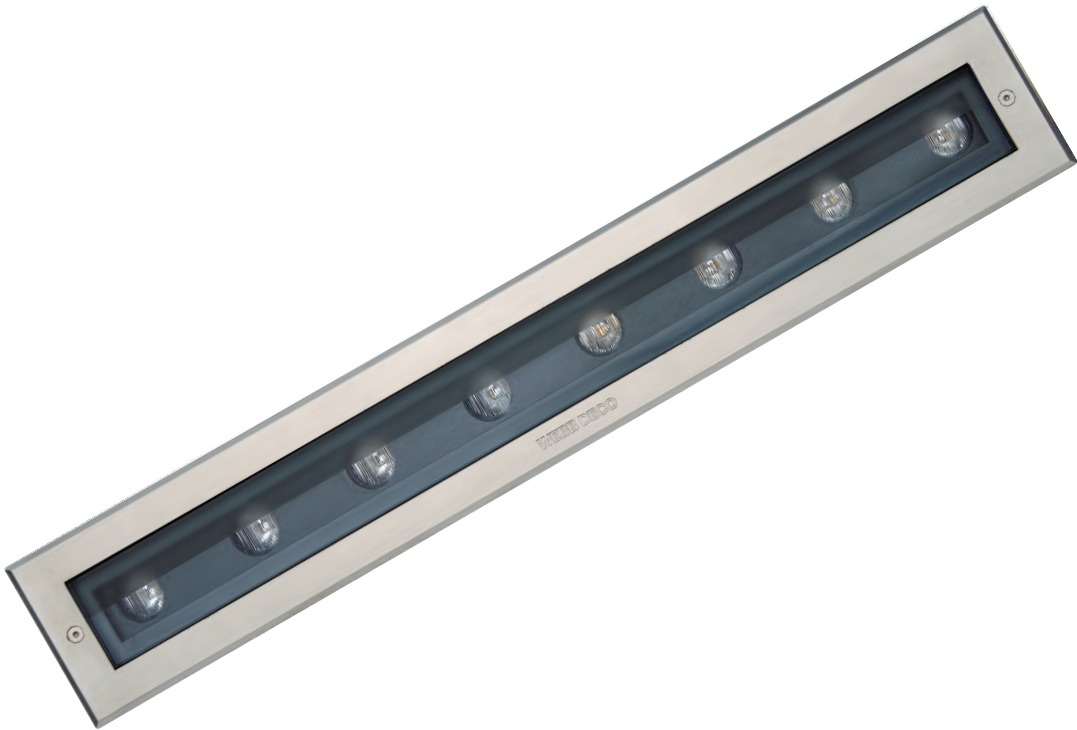10.0931



材质: 6063 T5 铝型材灯体;
锌合金端盖;
304/316 不锈钢面盖;
硅胶胶圈密封;
6063 铝型材预埋件;
铜镀镍防水接头, 304# 不锈钢紧固螺丝;
6mm 钢化安全玻璃

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30°C~ +50°C;
可调角度范围: 不可调

线材: 单色常亮: 1 条 0.5 米两 / 三芯线, 线径 7.5mm;
DMX512 控制: 2 条 0.5 米两 / 三芯电源线, 线径 7.5mm;
2 条 0.5 米四芯公母接头线, 线径 6.0mm

包装: 灯具净重: 4.22kg
包装尺寸: 1095x320x190mm
包装容量: 6 灯 / 箱
包装毛重: 25kg

Material: Corrosion-resistant aluminum housing & end caps;
6mm clear safety glass;
Anti-aging waterproof silicone gasket;
304/316 stainless steel cover ring and external fasten screws.
Extrusion aluminum recessed box

Finishing: Stainless steel

Installation: Ambient temperature: -30°C~ +50°C ;
Single Color: 1x 0.5m length 2/3-cores Ø7.5mm power supply cable;
DMX512 controllable: 2x 0.5m length 2/3-cores Ø7.5mm power supply cable & 2x 0.5m 4-cores Ø6.0mm data cables with waterproof connector.
Nickled plated brass waterproof cable gland

Packaging: Net Weight: 4.22kg
1095x320x190mm(6pcs/ctn)



45°C @ Ta 25°C



500Kg



Anti-condensation kit




IP68 Waterproof male-female connector





Optional Accessory IP68 Junction box















Optional frosted glass



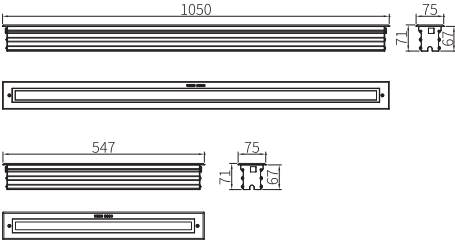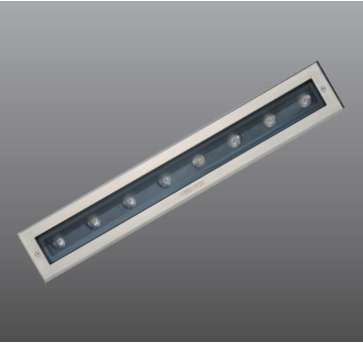

10.0931



 LED 20W 4000k 15°			H(m) 2.0 5.0 10.0 20.0	medlux 2352.6 376.2 94.2 23.4	maxlux 3426 548.4 136.8 34.8
 LED 20W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 1200.3 191.8 43.3 11	maxlux 1804.4 280 67.7 17.1
 LED 20W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 510.6 85.1 19.1 7.7	maxlux 687.2 104.6 28.1 12.7
 LED 20W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 188.7 31.6 7 3	maxlux 253.8 38.5 10.3 4.8
 LED 20W 4000k 12X50°			H(m) 2.0 5.0 10.0 20.0	medlux 5478 1585.7 330.8 151.1	maxlux 7260 1802.2 454.7 201.9
 LED 20W 4000k 30X65°			H(m) 2.0 5.0 10.0 20.0	medlux 3874 956.3 238.4 106	maxlux 4800 1199.4 300.7 133.7

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
10.0931.D18V24L1050	18X1.1W	2700K-5700K	Ra>80	2500lm	20W	1875lm	93.8lm/W	ON/OFF	15°/25°/40°/60°/12x50°
10.0931.D18V220L1050	18X1.1W	2700K-5700K	Ra>80	2500lm	24W	1875lm	78lm/W	ON/OFF	15°/25°/40°/60°/12x50°
10.0931.A18FV24L1050	18X1.1W	RGB		840lm	20W	672lm	33.6lm/W	DMX512	12x65°/30x65°
10.0931.A18FV220L1050	18X1.1W	RGB		840lm	24W	672lm	28lm/W	DMX512	12x65°/30x65°
10.0931.D9V24L547	9X1.1W	2700K-5700K	Ra>80	1250lm	10W	938lm	93.8lm/W	ON/OFF	15°/25°/40°/60°/12x50°
10.0931.D9V220L547	9X1.1W	2700K-5700K	Ra>80	1250lm	13W	938lm	72lm/W	ON/OFF	15°/25°/40°/60°/12x50°
10.0931.A9FV24L547	9X1.1W	RGB		420lm	10W	336lm	33.6lm/W	DMX512	12x65°/30x65°
10.0931.A9FV220L547	9X1.1W	RGB		420lm	13W	336lm	25.8lm/W	DMX512	12x65°/30x65°

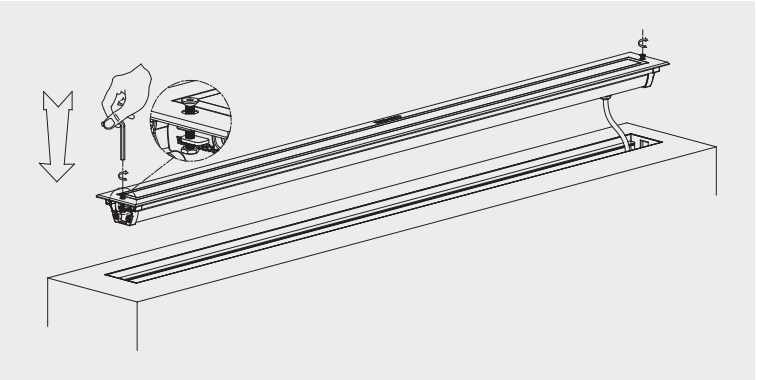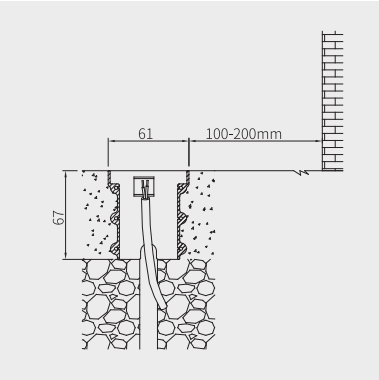Installation:





10.0932



材质: 6063 T5 铝型材灯体、预埋件；
锌合金端盖；
304/316 不锈钢面盖；
硅胶圈密封；
铜镀镍防水接头，304# 不锈钢紧固螺丝；
8mm 钢化安全玻璃

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度：-30℃～ +50℃；
可调角度范围：不可调

线材: 单色常亮：1 条 0.5 米两 / 三芯线，线径 7.5mm；
DMX512 控制：2 条 0.5 米两 / 三芯电源线，线径 7.5mm；
2 条 0.5 米四芯公母接头线，线径 6.0mm

包装: 灯具净重：6.8kg
包装尺寸：1070x255x190mm
包装容量：4 灯 / 箱
包装毛重：28kg

Material: Corrosion-resistant aluminum housing & end caps;
8mm clear safety glass;
Anti-aging waterproof silicone gasket;
304/316 stainless steel cover ring and external fasten screws.
Extrusion aluminum recessed box

Finishing: Stainless steel

Installation: Ambient temperature: -30℃～ +50℃ ;
Single Color: 1x 0.5m length 2/3-cores Ø7.5mm power supply cable;
DMX512 controllable: 2x 0.5m length 2/3-cores Ø7.5mm power supply cable & 2x 0.5m 4-cores Ø6.0mm data cables with waterproof connector.
Nickled plated brass waterproof cable gland

Packaging: Net Weight: 6.8kg
1070x255x190mm(4pcs/ctn)



45°C @ Ta 25°C



500Kg



Anti-condensation kit



IP68 Waterproof male-female connector



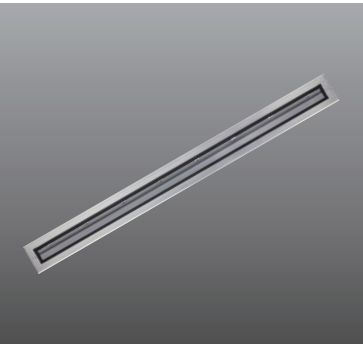
Optional Accessory IP68 Junction box





Unique Asymmetric Optics




10.0932




LED 36W
4000k
75X135°





H(m)	medlux	maxlux
2.0	514.6	552.6
5.0	131.2	145.7
10.0	32.3	35.9
20.0	14	15.7

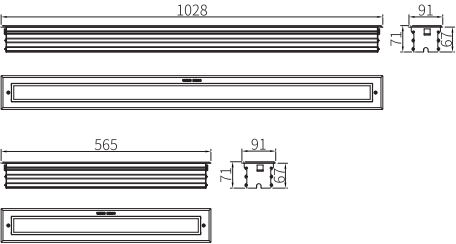


Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
10.0932.A18V24L1028	18X2W	2700K-5700K	Ra>80	4680lm	36W	3744lm	104lm/W	ON/OFF	Asymmetric 75x135°
10.0932.A18V220L1028	18X2W	2700K-5700K	Ra>80	4680lm	41W	3744lm	90.5lm/W	ON/OFF	Asymmetric 75x135°
10.0932.A18FV24L1028	18X2W	RGB		1512lm	36W	1210lm	33.6lm/W	DMX512	Asymmetric 75x135°
10.0932.A18FV220L1028	18X2W	RGB		1512lm	41W	1210lm	29.4lm/W	DMX512	Asymmetric 75x135°
10.0932.A9V24L565	9X2W	2700K-5700K	Ra>80	2340lm	18W	1872lm	104lm/W	ON/OFF	Asymmetric 75x135°
10.0932.A9V220L565	9X2W	2700K-5700K	Ra>80	2340lm	21W	1872lm	89lm/W	ON/OFF	Asymmetric 75x135°
10.0932.A9FV24L565	9X2W	RGB		756lm	18W	605lm	33.6lm/W	DMX512	Asymmetric 75x135°
10.0932.A9FV220L565	9X2W	RGB		756lm	21W	605lm	28.5lm/W	DMX512	Asymmetric 75x135°

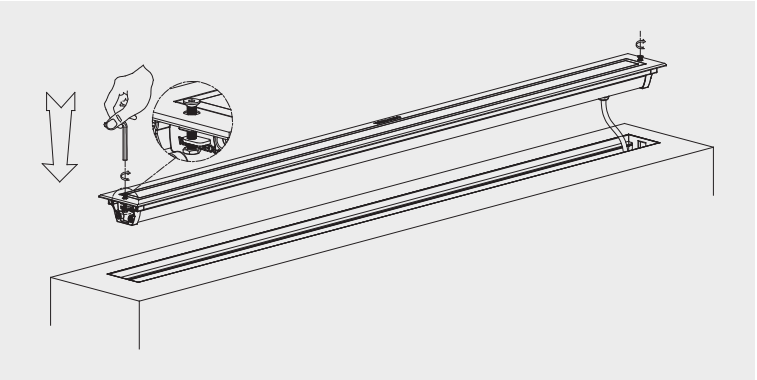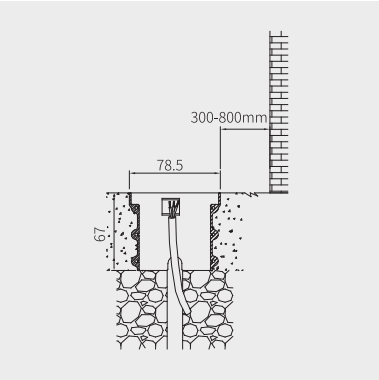Installation：





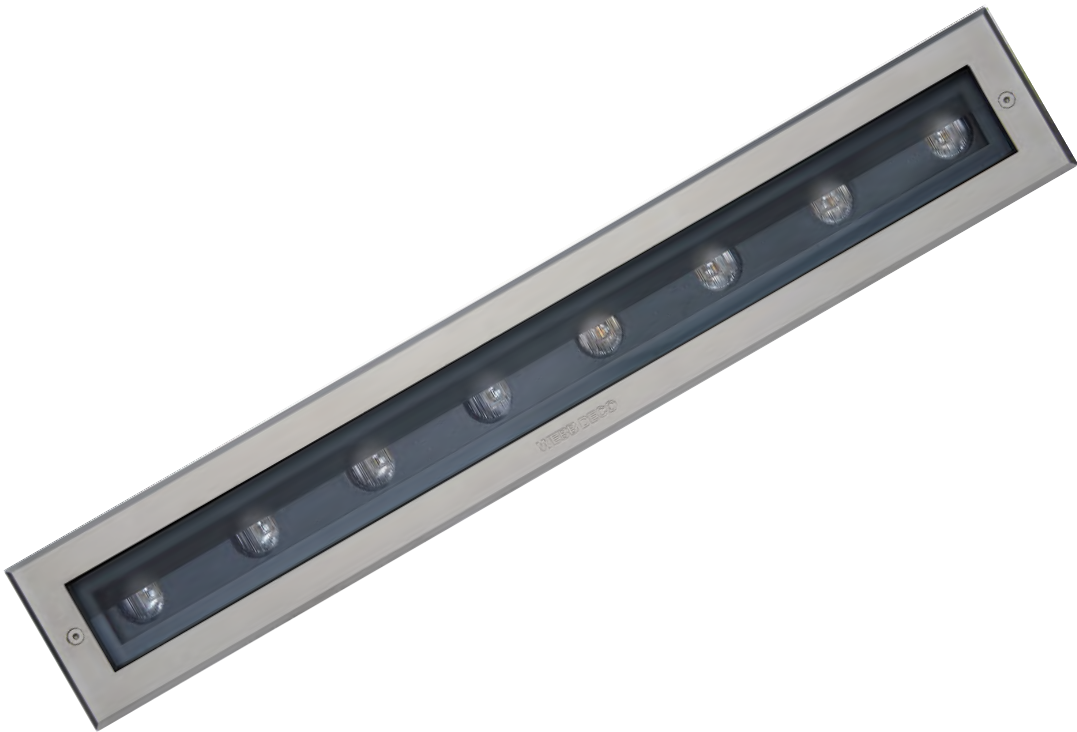10.0933



材质: 6063 T5 铝型材灯体、预埋件； 锌合金端盖；
304/316 不锈钢面盖；
硅胶胶圈密封；
铜镀镍防水接头，304# 不锈钢紧固螺丝；
8mm 钢化安全玻璃

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度：-30℃～ +50℃；
可调角度范围：不可调

线材: 单色常亮： 1 条 0.5 米两 / 三芯线，线径 7.5mm；
DMX512 控制： 2 条 0.5 米两 / 三芯电源线，线径 7.5mm；
2 条 0.5 米四芯公母接头线，线径 6.0mm

包装: 灯具净重： 6.9kg
包装尺寸： 1120x305x245mm
包装容量： 4 灯 / 箱
包装毛重： 28kg

Material: Corrosion-resistant aluminum housing & end caps;
8mm clear safety glass;
Anti-aging waterproof silicone gasket;
304/316 stainless steel cover ring and external fasten screws.
Extrusion aluminum recessed box

Finishing: Stainless steel

Installation: Ambient temperature: -30℃～ +50℃ ;
Single Color: 1x 0.5m length 2/3-cores Ø7.5mm power supply cable;
DMX512 controllable: 2x 0.5m length 2/3-cores Ø7.5mm power supply cable & 2x 0.5m 4-cores Ø6.0mm data cables with waterproof connector.
Nickled plated brass waterproof cable gland

Packaging: Net Weight: 6.9kg
1120x305x245mm(4pcs/ctn)



45°C @ Ta 25°C



500Kg



Anti-condensation kit

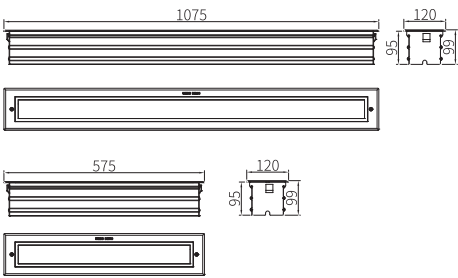
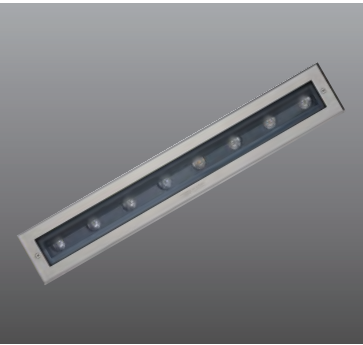
















IP68 Waterproof male-female connector



Optional Accessory IP68 Junction box



10.0933



 LED 36W 4000k 75X135°			H(m) 2.0 5.0 10.0 20.0	medlux 514.6 131.2 32.3 14	maxlux 552.6 145.7 35.9 15.7
 LED 36W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 8652.6 1404.6 331.2 82.8	maxlux 12709.8 2070 496.8 124.2
 LED 36W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 2160.5 345.2 77.9 19.8	maxlux 3247.9 504 121.8 30.8
 LED 36W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 919 153.2 43.4 13.9	maxlux 1236.9 188.3 50.6 22.9
 LED 36W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 339.7 56.9 12.6 5.4	maxlux 42.8 70 18.5 8.6
 LED 36W 4000k 12X55°			H(m) 2.0 5.0 10.0 20.0	medlux 9860.4 2854.3 595.4 271.9	maxlux 13068 3243.9 818.5 363.4
 LED 36W 4000k 30X65°			H(m) 2.0 5.0 10.0 20.0	medlux 6973.2 1721.3 429.1 190.8	maxlux 8640 2158.9 541.2 240.6


Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
10.0933.A18V24L1075	18X2W	2700K-5700K	Ra>80	4680lm	36W	3744lm	104lm/W	ON/OFF	Asymmetirc 75x135° 10°/ 25°/40°/60°/12x50°
10.0933.A18V220L1075	18X2W	2700K-5700K	Ra>80	4680lm	48W	3744lm	78lm/W	ON/OFF	Asymmetric 75x135° 10°/ 25°/40°/60°/12x50°
10.0933.A18FV24L1075	18X2W	RGB		1512lm	36W	1210lm	33.6lm/W	DMX512	Asymmetirc 75x135° 10°/ 25°/40°/60°/12x50°
10.0933.A18FV220L1075	18X2W	RGB		1512lm	48W	1210lm	25.2lm/W	DMX512	Asymmetric 75x135° 10°/ 25°/40°/60°/12x50°
10.0933.A9V24L575	9X2W	2700K-5700K	Ra>80	2340lm	18W	1872lm	104lm/W	ON/OFF	Asymmetirc 75x135° 10°/ 25°/40°/60°/12x50°
10.0933.A9V220L575	9X2W	2700K-5700K	Ra>80	2340lm	24W	1872lm	78lm/W	ON/OFF	Asymmetric 75x135° 10°/ 25°/40°/60°/12x50°
10.0933.A9FV24L575	9X2W	RGB		756lm	18W	605lm	33.6lm/W	DMX512	Asymmetirc 75x135° 10°/ 25°/40°/60°/12x50°
10.0933.A9FV220L575	9X2W	RGB		756lm	24W	605lm	25.2lm/W	DMX512	Asymmetric 75x135° 10°/ 25°/40°/60°/12x50°

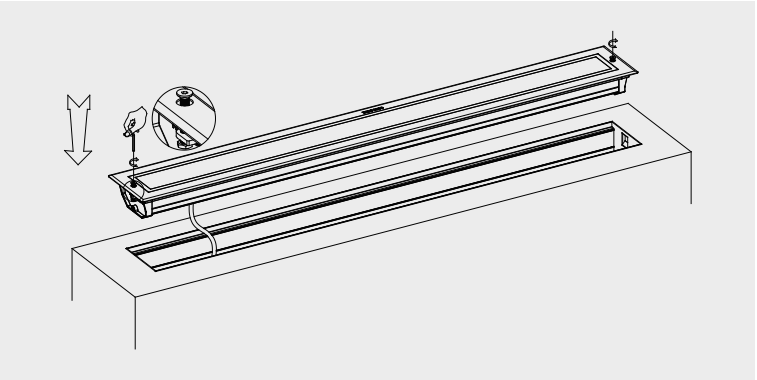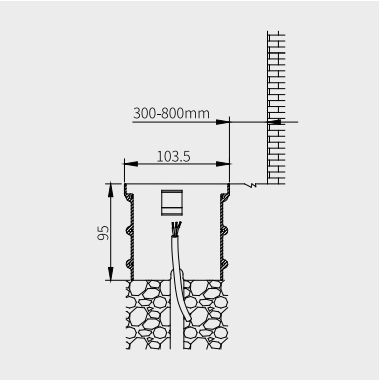Installation:





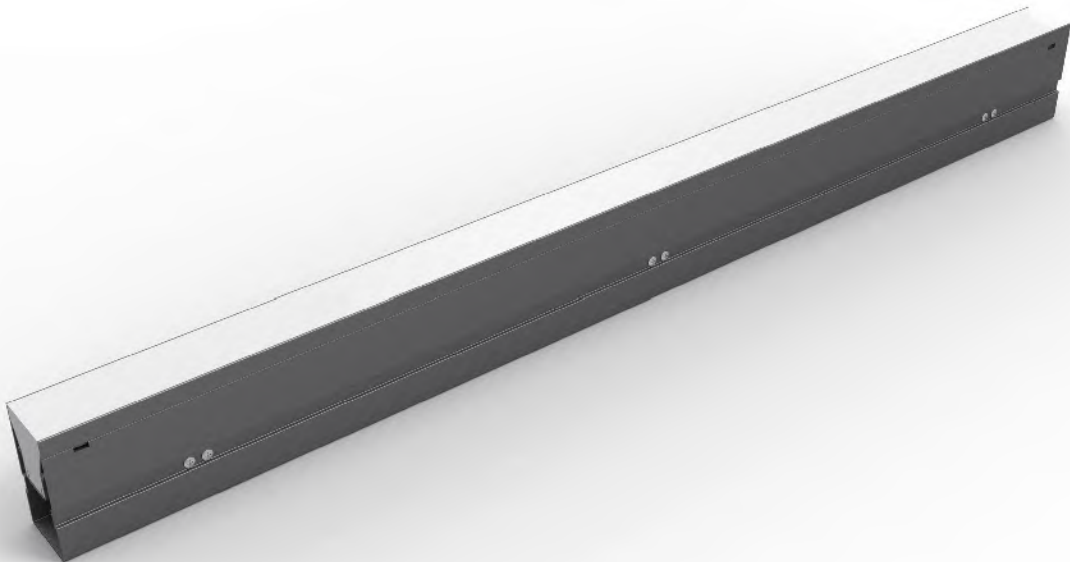10.0934



材质: 6063 T5 铝型材灯体, 预埋件;
304# 不锈钢紧固螺丝;
抗 UV 聚氨酯 + 扩散剂灌封;
铜镀镍防水接头

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30°C~ +50°C;
可调角度范围: 不可调

线材: 单色常亮: 1 条 0.5 米两、三芯线, 线径 7.5mm;
DMX512 控制: 2 条 0.5 米两 / 三芯电源线, 线径 7.5mm;
2 条 0.5 米四芯公母接头线, 线径 6.0mm

包装: 灯具净重: 4.24kg
包装尺寸: 1055x198x255mm
包装容量: 4 灯 / 箱
包装毛重: 17.5kg

Material: Corrosion-resistant aluminum housing & end caps;
UV-resistant PU diffuser;
304/316 external fasten screws.
Extrusion aluminum recessed box

Finishing: Anodized aluminum finishing

Installation: Ambient temperature: -30°C~ +50°C ;
Single Color: 1x 0.5m length 2/3-cores Ø7.5mm power supply cable;
DMX512 controllable: 2x 0.5m length 2/3-cores Ø7.5mm power supply cable & 2x 0.5m 4-cores Ø6.0mm data cables with waterproof connector.
Nickled plated brass waterproof cable gland

Packaging: Net Weight: 4.24kg
1055x198x255mm(4pcs/ctn)



40°C @ Ta 25°C



500Kg



Anti-condensation kit



IP68 Waterproof male-female connector

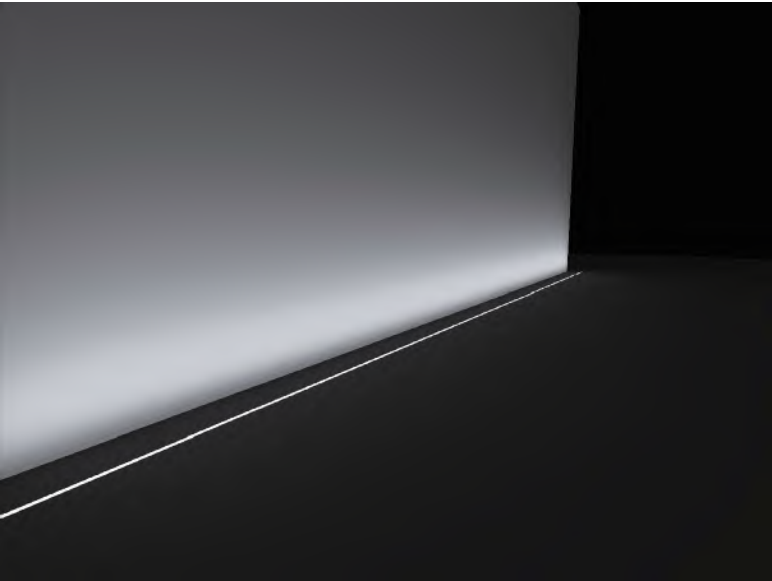


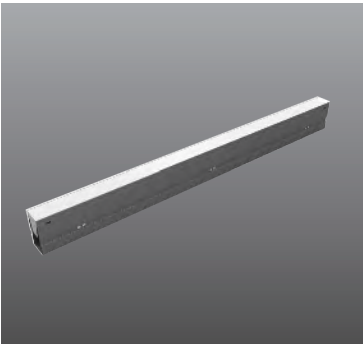


Optional Accessory IP68 Junction box




Continuous installation

10.0934




Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
10.0934.D60V24L1000	60X0.17W	2200K-5700K	Ra>80	1250lm	10W	625lm	62.5lm/W	ON/OFF	120°
10.0934.D60V220L1000	60X0.17W	2200K-5700K	Ra>80	1250lm	13W	625lm	48lm/W	ON/OFF	120°
10.0934.D60FV24L1000	60X0.17W	RGB		420lm	10W	210lm	21lm/W	DMX512	120°
10.0934.D60FV220L1000	60X0.17W	RGBW		420lm	13W	210lm	16.1lm/W	DMX512	120°
10.0934.D30V24L500	30X0.17W	2200K-5700K	Ra>80	625lm	5W	312.5lm	62.5lm/W	ON/OFF	120°
10.0934.D30V220L500	30X0.17W	2200K-5700K	Ra>80	625lm	6.5W	312.5lm	48lm/W	ON/OFF	120°
10.0934.D30FV24L500	30X0.17W	RGB		210lm	5W	105lm	21lm/W	DMX512	120°
10.0934.D30SV220L500	30X0.17W	RGBW		210lm	6.5W	105lm	16.1lm/W	DMX512	120°

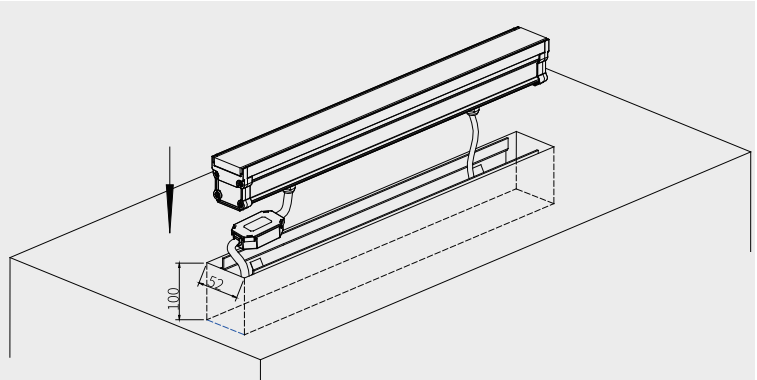Installation:





10.0935



材质: 6063 T5 铝型材灯体、预埋件； 锌合金端盖；
304/316 不锈钢面盖；
硅胶胶圈密封；
铜镀镍防水接头，304# 不锈钢紧固螺丝；
8mm 钢化安全玻璃

表面处理: 双层耐候耐腐蚀静电粉末喷涂

安装: 适应环境温度：-30℃～ +50℃；
可调角度范围：水平方向，不可调；
垂直方向，±15°

线材: 单色常亮：1 条 0.5m 两芯线，线径 7.5mm；
DMX512 控制：2 条 0.5 米两 / 三芯电源线，线径 7.5mm；
2 条 0.5 米四芯公母接头线，线径 6.0mm

包装: 灯具净重：6.87kg
包装尺寸：1080x255x310mm
包装容量：4 灯 / 箱
包装毛重：28kg

Material: Corrosion-resistant aluminum housing & end caps;
8mm clear safety glass;
Anti-aging waterproof silicone gasket;
304/316 stainless steel cover ring and external fasten screws.
Extrusion aluminum recessed box

Finishing: Stainless steel

Installation: Ambient temperature: -30℃～ +50℃ ;
Tilttable: ±15° ;
Single Color: 1x 0.5m length 2/3-cores Ø7.5mm power supply cable;
DMX512 controllable: 2x 0.5m length 2/3-cores Ø7.5mm power supply cable & 2x 0.5m 4-cores Ø6.0mm data cables with waterproof connector.
Nickled plated brass waterproof cable gland


Packaging: Net Weight: 6.87kg
1080x255x310mm(4pcs/ctn)



45°C @ Ta 25°C



500Kg



Anti-condensation kit



IP68 Waterproof male-female connector



Optional Accessory
IP68 Junction box



Anti-glare louver



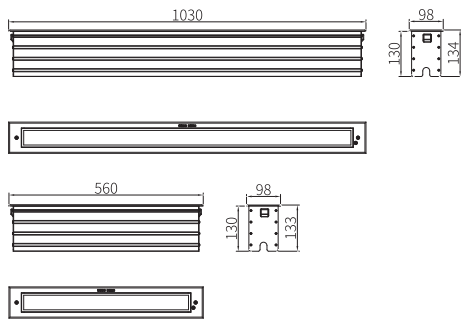
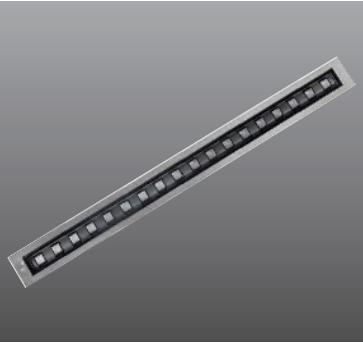
Easy Tilt device













Easy Tilt device





10.0935



 LED 36W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 8652.6 1404.6 331.2 82.8	maxlux 12709.8 2070 496.8 124.2
 LED 36W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 2160.5 345.2 77.9 19.8	maxlux 3247.9 504 121.8 30.8
 LED 36W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 919 153.2 43.4 13.9	maxlux 1236.9 188.3 50.6 22.9
 LED 36W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 339.7 56.9 12.6 5.4	maxlux 42.8 70 18.5 8.6
 LED 36W 4000k 12X50°			H(m) 2.0 5.0 10.0 20.0	medlux 9860.4 2854.3 595.4 271.9	maxlux 13068 3243.9 818.5 363.4

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
10.0935.D18V24L1030	18X1.1W	2200K-5700K	Ra>80	2500lm	20W	1875lm	93.8lm/W	ON/OFF	15°/30°/40°/60°/12x50°
10.0935.A18V24L1030	18X2W	2200K-5700K	Ra>80	4680lm	36W	3744lm	104lm/W	ON/OFF	15°/30°/40°/60°/12x50°
10.0935.A18FV24L1030	18X2W	RGB		1512lm	36W	1210lm	33.6lm/W	DMX512	40°/60°/12x50°
10.0935.D9V24L560	9X1W	2200K-5700K	Ra>80	1125lm	9W	938lm	93.8lm/W	ON/OFF	15°/30°/40°/60°/12x50°

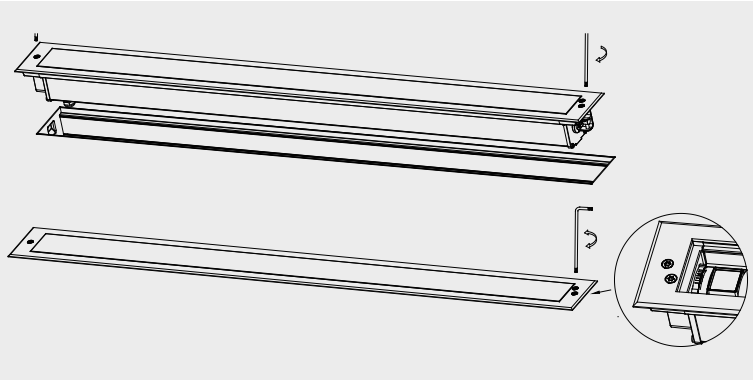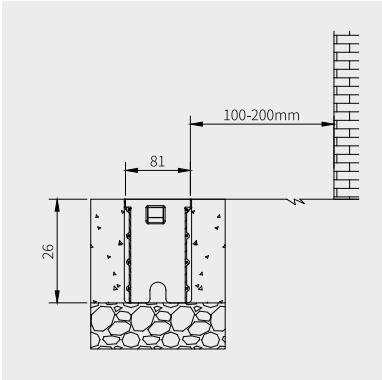Installation:





10.0936



材质: ADC12 铝合金灯体;
6063 T5 铝型材预埋件;
硅胶胶圈密封;
铜镀镍防水接头;
6mm 钢化安全玻璃

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30°C~ +50°C;

线材: 单色常亮: 1 条 1m 两 / 三芯线;
DMX512 控制: 2 条 0.5 米两 / 三芯电源线;
+ 2 条 0.5 米四芯公母接头线

包装: 灯具净重: 6kg
包装尺寸: 1255x225x235mm
包装容量: 4 灯 / 箱
包装毛重: 25kg

Material: Corrosion-resistant aluminum housing & end caps;
6mm clear safety glass;
Anti-aging waterproof silicone gasket;
Extrusion aluminum recessed box

Finishing: Double layers of DUPONT UV-resistant polyester powder coating

Installation: Ambient temperature: -30°C~ +50°C ;
Single Color: 1x 0.5m length 2/3-cores Ø7.5mm power supply cable;
DMX512 controllable: 2x 0.5m length 2/3-cores Ø7.5mm power supply cable & 2x 0.5m 4-cores Ø6.0mm data cables with waterproof connector.
Nickled plated brass waterproof cable gland

Packaging: Net Weight: 6kg
1255x225x235mm(4pcs/ctn)



45°C @ Ta 25°C



500Kg



Anti-condensation kit



IP68 Waterproof male-female connector



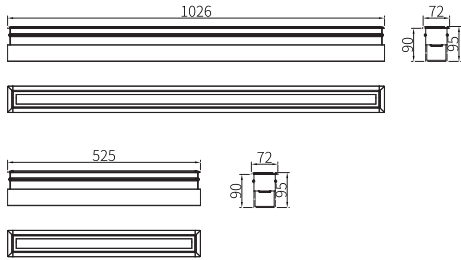
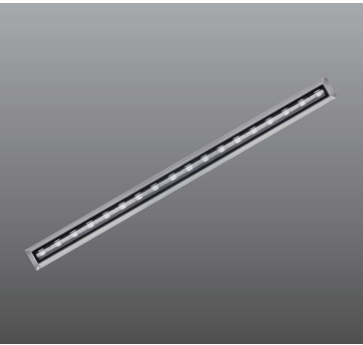
Optional Accessory IP68 Junction box





Excellent anti-glare design



10.0936





LED 36W
4000k
40°





H(m)	medlux	maxlux
2.0	919	1236.9
5.0	153.2	188.3
10.0	43.4	50.6
20.0	13.9	22.9

LED 36W
4000k
60°



H(m)	medlux	maxlux
2.0	339.7	42.8
5.0	56.9	70
10.0	12.6	18.5
20.0	5.4	8.6

LED 36W
4000k
12X50°



H(m)	medlux	maxlux
2.0	9860.4	13068
5.0	2854.3	3243.9
10.0	595.4	818.5
20.0	271.9	363.4

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
10.0936.D24V24L1026	24X1.1W	2200K-5700K	Ra>80	3250lm	26W	2438lm	93.8lm/W	ON/OFF	40°/60°/12x50°
10.0936.D24CV24L1026	24X1.1W	2200K-5700K	Ra>80	3250lm	26W	2438lm	93.8lm/W	DMX512	40°/60°/12x50°
10.0936.A18V24L1026	18X2W	2200K-5700K	Ra>80	4680lm	36W	3744lm	104lm/W	ON/OFF	40°/60°/12x50°
10.0936.A18FV24L1026	18X2W	RGB		1500lm	36W	1200lm	33lm/W	DMX512	40°/60°/12x50°
10.0936.A18V220L1026	18X2W	2200K-5700K	Ra>80	4680lm	40W	3744lm	93lm/W	ON/OFF	40°/60°/12x50°
10.0936.A18FV220L1026	18X2W	RGB		1500lm	40W	1200lm	30lm/W	DMX512	40°/60°/12x50°

Installation:

