



10.0913



**材质:** ADC12 铝合金灯体;  
304/316 不锈钢面盖;  
硅胶圈密封;  
PP 塑料预埋件;  
铜镀镍防水接头;  
304# 不锈钢紧固螺丝;  
15mm 钢化安全玻璃

**表面处理:** 双层耐侯耐腐蚀静电粉末喷涂

**安装:** 适应环境温度: -30°C~ +50°C;  
可调角度范围: 不可调

**线材:** 单色常亮: 1 条 0.5 米两 / 三芯线, 线径 7.0mm;  
DMX512 控制: 1 条 0.5 米两芯电源线, 线径 7.0mm;  
2 条 0.5 米四芯信号线, 线径 6.0mm


**包装:** 灯具净重: 1.65kg  
内盒尺寸: 180x180x195mm  
外箱尺寸: 555x370x410mm  
包装容量: 12 灯 / 箱  
包装毛重: 21kg

**Material:** ADC12 corrosion-resistant die-cast aluminum housing;  
15mm clear safety glass;  
Anti-aging waterproof silicone gasket;  
304/316 stainless steel cover ring and external fasten screws;  
PP plastic recessed box

**Finishing:** Stainless steel

**Installation:** Ambient temperature: -30°C~ +50°C ;  
Single Color: 1x 0.5m length 2/3-cores Ø7.0mm power supply cable;  
DMX512 compatible: 1x 0.5m length 2-cores Ø7.0mm power supply cable & 2x 0.5m 4-cores Ø6.0mm data cables.  
Nickel plated brass waterproof cable gland


**Packaging:** Net Weight: 1.65kg  
Inner carton: 180x180x195mm  
Outer carton: 555x370x410mm(12pcs/ctn)



45°C @ Ta 25°C



2000kg



Anti-condensation kit



Optional Accessory  
IP68 Junction box



10.0903  
Aluminum cover for  
Flush mounting




Flush mounting  
Covered mounting



Individual gear  
compartment

10.0913

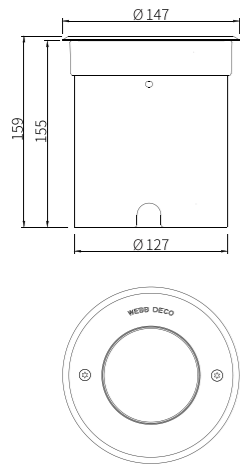

| LED 12W<br>4000k<br>Beam Angle | Beam Diagram | Beam Diagram | H(m) | medlux | maxlux |
|--------------------------------|--------------|--------------|------|--------|--------|
| 8°                             |              |              | 2.0  | 4304.4 | 5994   |
|                                |              |              | 5.0  | 688.8  | 960    |
|                                |              |              | 10.0 | 172.2  | 240    |
|                                |              |              | 20.0 | 43     | 60     |
| 14°                            |              |              | 2.0  | 3033.6 | 4221.6 |
|                                |              |              | 5.0  | 485.4  | 675.4  |
|                                |              |              | 10.0 | 121    | 168.9  |
|                                |              |              | 20.0 | 30.3   | 42.2   |
| 20°                            |              |              | 2.0  | 1725   | 2430   |
|                                |              |              | 5.0  | 280.5  | 389    |
|                                |              |              | 10.0 | 70.1   | 97.2   |
|                                |              |              | 20.0 | 17.5   | 24.2   |
| 30°                            |              |              | 2.0  | 704    | 977.5  |
|                                |              |              | 5.0  | 112.8  | 162    |
|                                |              |              | 10.0 | 35.2   | 40.8   |
|                                |              |              | 20.0 | 7.2    | 10.2   |
| 40°                            |              |              | 2.0  | 503.3  | 756    |
|                                |              |              | 5.0  | 80.4   | 120    |
|                                |              |              | 10.0 | 20.4   | 30     |
|                                |              |              | 20.0 | 5      | 7.56   |
| 60°                            |              |              | 2.0  | 237.2  | 366.7  |
|                                |              |              | 5.0  | 38.4   | 58.8   |
|                                |              |              | 10.0 | 9.6    | 14.4   |
|                                |              |              | 20.0 | 2.4    | 3.6    |

| Model No.       | LED Color   | CRI   | Light source Luminous Flux @4000K | System Power | Luminaire Luminous Flux @4000K | Luminaire Efficiency | Control Mode | Beam Angle  |
|-----------------|-------------|-------|-----------------------------------|--------------|--------------------------------|----------------------|--------------|---|
| 10.0913.A4V24   | 2200K-5700K | Ra>80 | 1680lm                            | 12W          | 1236lm                         | 103lm/W              | ON/OFF       | 8°/14°/20°/30°/40°/60°                            |
| 10.0913.A4CV24  | 2200K-5700K | Ra>80 | 1680lm                            | 12W          | 1236lm                         | 103lm/W              | DMX512       | 8°/14°/20°/30°/40°/60°                            |
| 10.0913.A4V220  | 2200K-5700K | Ra>80 | 1960lm                            | 14W          | 1330lm                         | 95lm/W               | ON/OFF       | 8°/14°/20°/30°/40°/60°                            |
| 10.0913.E4SV24  | RGBW        |       | 840lm                             | 12W          | 480lm                          | 40lm/W               | DMX512       | 10°/16°/25°/40°                                   |
| 10.0913.E4SV220 | RGBW        |       | 980lm                             | 14W          | 532lm                          | 38lm/W               | DMX512       | 10°/16°/25°/40°                                   |
| 10.0913.D18CV24 | 2200K-5700K | Ra>80 | 450lm                             | 3W           | 180lm                          | 60m/W                | ON/OFF       | 120°  |
| 10.0913.E18SV24 | RGBW        |       | 165lm                             | 3W           | 51lm                           | 17lm/W               | DMX512       | 120°  |
| 10.0913.B1V220  | 2200K-5700K | Ra>80 | 1450lm                            | 10W          | 940lm                          | 94lm/W               | ON/OFF       | 12°/25°/40°/60°<br>Asymmetric 34x60-20°/35x85-30° |
| 10.0913.B1CV220 | 2200K-5700K | Ra>80 | 1450lm                            | 10W          | 920lm                          | 92lm/W               | DMX512       | 12°/25°/40°/60°<br>Asymmetric 34x60-20°/35x85-30° |

Installation:

