

产品型号：


20. 0508S



基本参数：

- 材质：灯体：ADC12压铸铝合金及6063挤压铝合金
反射器：99.99%高纯度阳极氧化铝
出光玻璃：4mm强化安全玻璃
密封圈：耐老化耐水蒸气胶圈
紧固件：304#不锈钢螺丝
- 表面处理：DuPont2层氟碳喷涂或环氧聚酯粉喷涂
- 输入电压：AC220V 50Hz；
- 光源寿命：≥9000小时；
- 防护等级：IP65, I 类绝缘,
- 引出线：灯具出线1.1m, 3×1mm² 电缆线
- 环境温度：（-30℃, +45℃）
- 内箱尺寸：
- 外箱尺寸：

灯具尺寸图：

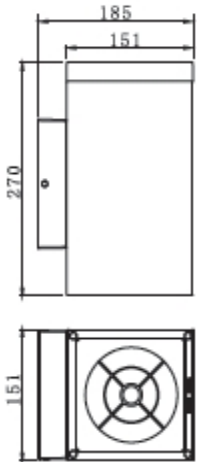

配光曲线图：

20.0508S.1S



H(m)	medlux	maxlux
2.0	9990	16918
5.0	1635	2588
10.0	426	747
20.0	107	168.3

20.0508S.1M18



H(m)	medlux	maxlux
2.0	1790	3159
5.0	290.6	478.2
10.0	83.8	126.7
20.0	21.1	29.8

20.0508S.1M28



H(m)	medlux	maxlux
2.0	1142	1654
5.0	186.6	269.8
10.0	46.9	68.2
20.0	11.8	17.3

20.0508S.1F38



H(m)	medlux	maxlux
2.0	895.3	1220.5
5.0	133.2	196.8
10.0	33.9	49.2
20.0	8.5	12.7

20.0508S.1F58




H(m)	medlux	maxlux
2.0	384.8	560.5
5.0	62.6	94.8
10.0	15.6	22.2
15.0	6.9	10.1

20.0508S.2S



H(m)	medlux	maxlux
2.0	19185	32248
5.0	3070	5160
10.0	768	1290
20.0	192	322

20.0508S.2M18




H(m)	medlux	maxlux
2.0	3420	4965
5.0	564.6	808.2
10.0	144.8	226.7
20.0	36.1	52.8

20.0508S.2M28



H(m)	medlux	maxlux
2.0	2263	3247
5.0	362.6	519.8
10.0	90.5	129.2
20.0	22.8	32.7

20.0508S.2F38



H(m)	medlux	maxlux
2.0	1647	2416
5.0	263.6	386.8
10.0	65.9	96.7
20.0	16.5	24.2

20.0508S.2F58



H(m)	medlux	maxlux
2.0	747	1116
5.0	123	186.8
10.0	29.9	41.7
15.0	13.5	19.2

产品型号说明：


20	0508S	*	*
灯具种类	模具型号	光源代码	光束角
20: 壁灯		1: HIT 30W-G12 2: HIT 70W-G12	S:窄角5-10° M:中角15-30° F:宽角30-60° W:超宽60-100°

灯具参数：

产品型号	光源	色温	灯头	光束角	光通量	灯具重量	包装毛重	图号
20. 0508S. 1S	HIT 35W	3000K/4200K	G12	6°	3300lm	3.6kg		
20. 0508S. 1M18	HIT 35W	3000K/4200K	G12	18°	3300lm	3.6kg		
20. 0508S. 1M28	HIT 35W	3000K/4200K	G12	28°	3300lm	3.6kg		
20. 0508S. 1F38	HIT 35W	3000K/4200K	G12	38°	3300lm	3.6kg		
20. 0508S. 1F58	HIT 35W	3000K/4200K	G12	58°	3300lm	3.6kg		
20. 0508S. 2S	HIT 70W	3000K/4200K	G12	6°	6600lm	4.1kg		
20. 0508S. 2M18	HIT 70W	3000K/4200K	G12	18°	6600lm	4.1kg		
20. 0508S. 2M28	HIT 70W	3000K/4200K	G12	28°	6600lm	4.1kg		
20. 0508S. 2F38	HIT 70W	3000K/4200K	G12	38°	6600lm	4.1kg		
20. 0508S. 2F58	HIT 70W	3000K/4200K	G12	58°	6600lm	4.1kg		

可选配件：

光学玻璃



0852.303

0852.304

彩色镀膜玻璃



0852.302P 0852.302B 0852.302Ψ 0852.302Γ 0852.302Π

遮光罩



0852.208

0852.209