

# WEBB DECO Lighting Specification

灯具技术规格书

www.webbdecolighting.com

## 产品型号:


20.0509S



## 基本参数:


- 材质: 灯体: ADC12压铸铝合金及6063挤压铝合金  
反射器: 99.99%高纯度阳极氧化铝  
出光玻璃: 4mm强化安全玻璃  
密封圈: 耐老化耐水蒸气胶圈  
紧固件: 304#不锈钢螺丝
- 表面处理: DuPont2层氟碳喷涂或环氧聚酯粉喷涂
- 输入电压: AC220V 50Hz;
- 光源寿命: ≥9000小时;
- 防护等级: IP65, I类绝缘,  $\nabla$ F
- 引出线: 灯具出线1.1m, 3×1mm<sup>2</sup>电缆线
- 环境温度: (-30℃, +45℃)
- 内箱尺寸:
- 外箱尺寸:

## 灯具尺寸图:

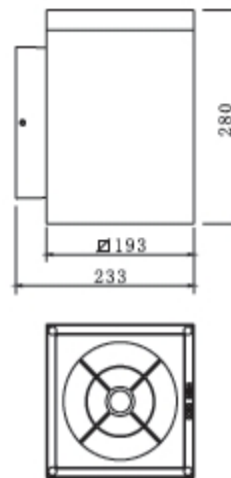


## 配光曲线图:

20.0509S.2S




H(m)	medlux	maxlux
2.0	29185	55248
5.0	5070	8810
10.0	1225	1990
20.0	331.2	525.6

20.0509S.2M18




H(m)	medlux	maxlux
2.0	4100	5865
5.0	616.3	968.2
10.0	159.3	270.7
20.0	43.3	63.2

20.0509S.2M28




H(m)	medlux	maxlux
2.0	2703	3887
5.0	434.6	571.8
10.0	108.5	155.2
20.0	27.2	37.1

20.0509S.2F38



H(m)	medlux	maxlux
2.0	1967	2896
5.0	315.6	386.8
10.0	78.9	96.7
20.0	19.7	24.2

20.0509S.2F58




H(m)	medlux	maxlux
2.0	889	1336
5.0	148.3	224.8
10.0	35.9	49.7
15.0	15.6	23.2

20.0509S.3S




H(m)	medlux	maxlux
2.0	58185	104248
5.0	9870	17660
10.0	2165	4060
20.0	681.2	1092.6

20.0509S.3M18




H(m)	medlux	maxlux
2.0	8210	11665
5.0	1216.3	1868.2
10.0	309.3	540.7
20.0	86.3	126.2

20.0509S.3M28




H(m)	medlux	maxlux
2.0	5403	7687
5.0	864.6	1141.8
10.0	208.5	305.2
20.0	54.2	74.1

20.0509S.3F38



H(m)	medlux	maxlux
2.0	3877	5696
5.0	625.6	766.8
10.0	156.9	186.7
20.0	39.7	48.2

20.0509S.3F58



H(m)	medlux	maxlux
2.0	1759	2356
5.0	248.3	448.6
10.0	70.9	98.8
15.0	30.8	46.5

灯具技术规格书

www.webbdecolighting.com

## 产品型号说明:


20	0509S	*	*
灯具种类	模具型号	光源代码	光束角
20: 壁灯		2: HIT 70W-G12 3: HIT 150W-G12	S: 窄角5-10° M: 中角15-30° F: 宽角30-60° W: 超宽60-100°

## 灯具参数:

产品型号	光源	色温	灯头	光束角	光通量	灯具重量	包装毛重	图号
20.0509S.2S	HIT 70W	3000K/4200K	G12	6°	6600lm	5.9kg		
20.0509S.2M18	HIT 70W	3000K/4200K	G12	18°	6600lm	5.9kg		
20.0509S.2M28	HIT 70W	3000K/4200K	G12	28°	6600lm	5.9kg		
20.0509S.2F38	HIT 70W	3000K/4200K	G12	38°	6600lm	5.9kg		
20.0509S.2F58	HIT 70W	3000K/4200K	G12	58°	6600lm	5.9kg		
20.0509S.3S	HIT 150W	3000K/4200K	G12	6°	14000lm	6.4kg		
20.0509S.3M18	HIT 150W	3000K/4200K	G12	18°	14000lm	6.4kg		
20.0509S.3M28	HIT 150W	3000K/4200K	G12	28°	14000lm	6.4kg		
20.0509S.3F38	HIT 150W	3000K/4200K	G12	38°	14000lm	6.4kg		
20.0509S.3F58	HIT 150W	3000K/4200K	G12	58°	14000lm	6.4kg		

## 可选配件:

光学玻璃



0853.303 0853.304

彩色镀膜玻璃



0853.305P 0853.305B 0853.305Ψ 0853.305Γ 0853.305Π

遮光罩



0853.208 0853.209