

WEBB
DECO

WEBB DECO

GENERAL CATALOGUE PROGRAM
2019-2020

LED 水下灯

Underwater Luminaires



80.8030
P_423



80.8031
P_427



80.8033
P_431



80.8035
P_435



80.8030R
P_439




80.8031R
P_443



80.8033R
P_447




80.8035R
P_451



80.6023
P_455




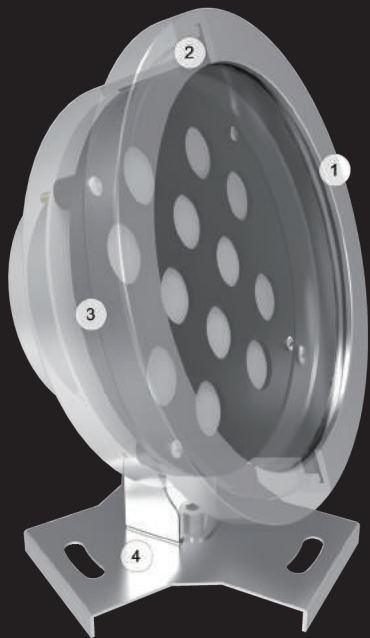海南·温德姆酒店
Wyndham Hotel · Hainan



- 1.316/316L 不锈钢灯体
- 2.IP68 密封结构
- 3. 安全电压光源模块
- 4. 表面安装支架

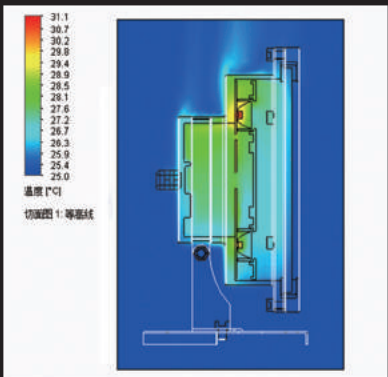- 1.316/316L stainless steel housing
- 2.IP68 seal structure
- 3.Safety low voltage lamp module
- 4.Surface mounted bracket



优异的散热性能
Excellent heat
dissipation



- 备有嵌入式安装方式
- 1. 灯体
- 2. 预埋件

- Recessed mounted available
- 1.Main housing
- 2.Recessed box



多种尺寸灯体及多种功率选择
Different sizes and power
categories



多种不同的配光角度选择
Different options of beam
angle light distribution



- 配备三米长外接电缆线及防吸水器，
防止水汽从电缆处浸入灯体
- 3 meters length external cable
attached with anti-condensation
device



DALI DMX512 RDM 可控
DALI DMX512 RDM
control available



80.8030



材质: 316L# 不锈钢灯体;
316# 不锈钢紧固螺丝;
硅胶圈密封;
铜镀镍防水接头;
8mm 钢化安全玻璃

安装: 适应环境温度: -30°C~ +50°C;
可调角度范围: 垂直方向, ±60°; 水平方向, 不可调

线材: 单色常亮: 1 条 3 米两芯线, 线径 7.5mm

包装: 灯具净重: 0.5kg
内盒尺寸: 80x80x100mm
外箱尺寸: 340x340x420mm
包装容量: 64 灯 / 箱
包装毛重: 34kg

Material: 316L stainless steel housing;
316 stainless steel external fasten screws;
Anti-aging waterproof silicone gasket;
8mm clear safety glass

Finishing: Stainless steel

Installation: Ambient temperature: -30°C~ +50°C ;
Tilttable: 0 ~ 60°

Packaging: Single color: 1x3m length 2cores Ø7.5mm power supply cable;
Nickled plated brass waterproof cable gland
Net weight: 0.5kg
Outer carton: 340x340x420mm(64pcs/ctn)



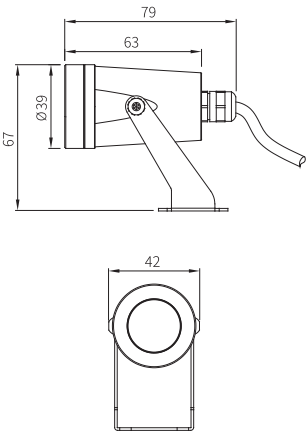
Compact size













Anti-condensation kit





80.8030



 LED 2.5W 4000k 8°			H(m) 2.0 5.0 10.0 20.0	medlux 903 144 36 9	maxlux 1428 237 60 15
 LED 2.5W 4000k 15°			H(m) 2.0 5.0 10.0 20.0	medlux 627 102 24 6	maxlux 921 150 36 9
 LED 2.5W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 69 12 2.7 1.2	maxlux 93 15 3.9 1.8
 LED 2.5W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 27 4.2 0.9 0.3	maxlux 36 5.1 1.5 0.6
 LED 2.5W 4000k 30x65°			H(m) 2.0 5.0 10.0 20.0	medlux 528 130.5 32.4 14.4	maxlux 654.6 163.5 41.1 18.3

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
80.8030.A1V12	1X2.5W	2200K-5700K	Ra>80	325lm	2.5W	260lm	104lm/W	ON/OFF	8°/15°/40°/60°/30x65°

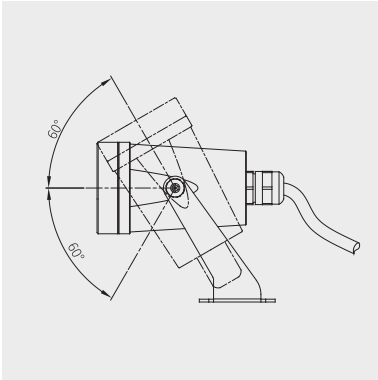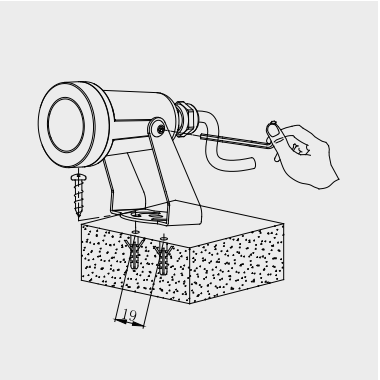Installation:





80.8031



材质: 316L# 不锈钢灯体;
316# 不锈钢紧固螺丝;
硅胶圈密封;
铜镀镍防水接头;
5mm 钢化安全玻璃

安装: 适应环境温度: -30°C~ +50°C;
可调角度范围: 垂直方向, 0 ~ 90°; 水平方向, 0 ~ 350°

线材: 单色常亮: 1 条 3 米两芯线, 线径 7.5mm;
DMX512 控制: 1 条 3 米两芯电源线, 线径 7.5mm;
2 条 3 米四芯信号线, 线径 6.5mm

包装: 灯具净重: 2.1kg
内盒尺寸: 165x165x175mm
外箱尺寸: 510x340x365mm
包装容量: 12 灯 / 箱
包装毛重: 27kg

Material: 316L stainless steel housing;
316 stainless steel external fasten screws;
Anti-aging waterproof silicone gasket;
5mm clear safety glass

Finishing: Stainless steel

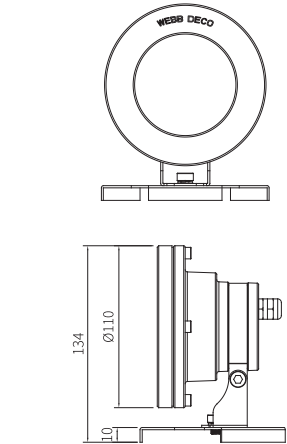
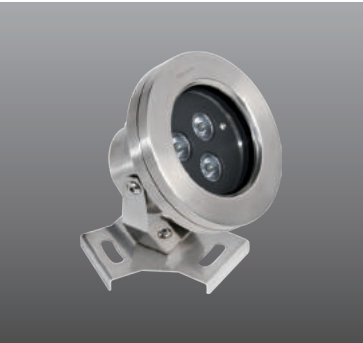
Installation: Ambient temperature: -30°C~ +50°C ;
Tilttable: 0 ~ 90°
Rotation angle: 0 ~ 350°
Single color: 1x3m length 2cores Ø7.5mm power supply cable;
DMX512 controllable: 1x3m length 2cores Ø7.5mm power supply cable;
2x3m length 4cores Ø6.5mm signal supply cable;
Nickled plated brass waterproof cable gland













Packaging: Net weight: 2.1kg
Outer carton: 510x340x365mm(12pcs/ctn)



Anti-condensation kit





80.8031



 LED 6W 4000k 8°			H(m) 2.0 5.0 10.0 20.0	medlux 2076.9 331.2 82.8 20.7	maxlux 3408.6 545.1 138 34.5
 LED 6W 4000k 15°			H(m) 2.0 5.0 10.0 20.0	medlux 1442.1 234.6 55.2 13.8	maxlux 2118.3 345 82.8 20.7
 LED 6W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 380 62.5 14 3.9	maxlux 565 90 22 5.8
 LED 6W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 158.7 27.6 6.2 2.7	maxlux 213.8 34.5 8.9 4.1
 LED 6W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 62.1 9.6 2 0.6	maxlux 82.8 11.7 3.4 1.3
 LED 6W 4000k 30x65°			H(m) 2.0 5.0 10.0 20.0	medlux 1214.4 300.1 74.5 33.1	maxlux 1505.5 376 94.5 42

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
80.8031.A3V12	3X2W	2200k-5700K	Ra>80	780lm	6W	620lm	103lm/W	ON/OFF	8°/15°/25°/40°/60°/30°x65°
80.8031.A3FV12	3X2W	RGB		252lm	6W	202lm	33.7lm/W	DMX512	8°/15°/25°/40°/60°/30°x65°

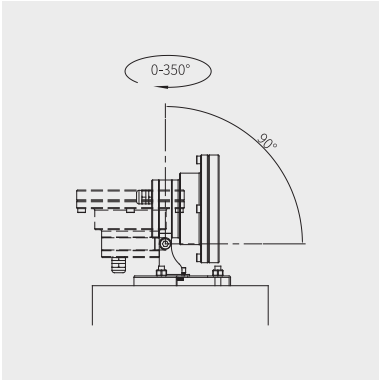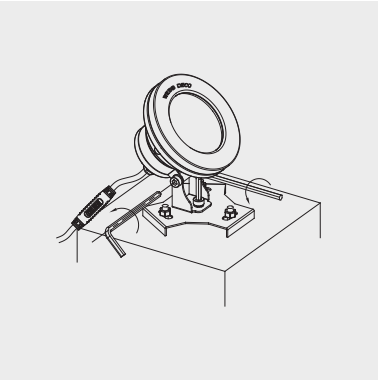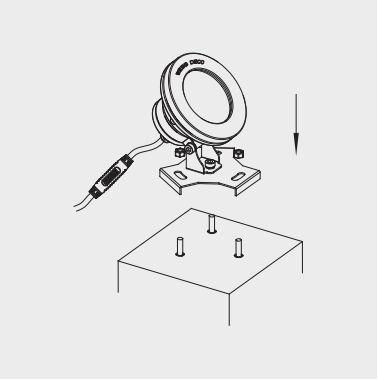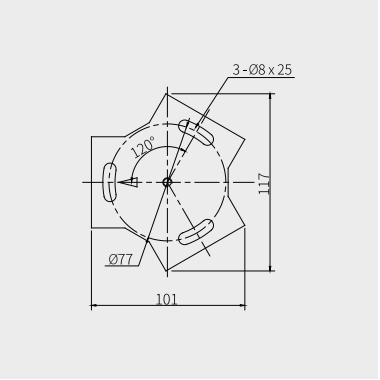Installation :





80.8033



- 材质：

316L# 不锈钢灯体；
316# 不锈钢紧固螺丝；
硅胶胶圈密封；
铜镀镍防水接头；
5mm 钢化安全玻璃
- 安装：

适应环境温度：-30℃～ +50℃；
可调角度范围：垂直方向，0 ～ 90°； 水平方向，0 ～ 350°
- 线材：

单色常亮：1 条 3 米两芯线，线径 7.5mm；
DMX512 控制：1 条 3 米两芯电源线， 线径 7.5mm；
2 条 3 米四芯信号线， 线径 6.5mm
- 包装：

灯具净重： 2.8kg
内盒尺寸： 205x205x190mm
外箱尺寸： 420x420x400mm
包装容量： 8 灯 / 箱
包装毛重： 24kg

- Material:

316L stainless steel housing;
316 stainless steel external fasten screws;
Anti-aging waterproof silicone gasket;
5mm clear safety glass
- Finishing:

Stainless steel
- Installation:

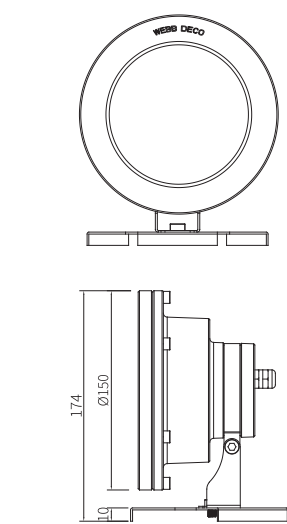
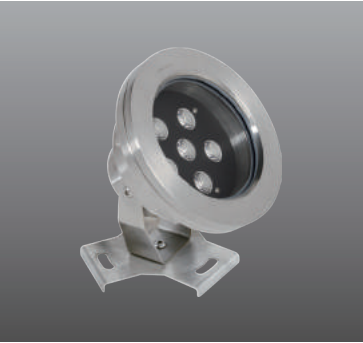
Ambient temperature: -30℃～ +50℃ ;
Tilttable: 0 ～ 90°
Rotation angle:0 ～ 350°
Single color: 1x3m length 2cores Ø7.5mm power supply cable;
DMX512 controllable: 1x3m length 2 cores Ø7.5mm power supply cable;
2x3m length 4cores Ø6.5mm signal supply cable;
Nickled plated brass waterproof cable gland
- Packaging:













Net weight: 2.8kg
Outer carton: 420x420x400mm(8pcs/ctn)



Anti-condensation kit





80.8033



 LED 12W 4000k 8°			H(m) 2.0 5.0 10.0 20.0	medlux 4153.8 662.4 165.6 41.1	maxlux 6717.2 1090.2 276 69
 LED 12W 4000k 15°			H(m) 2.0 5.0 10.0 20.0	medlux 2884.2 469.2 110.4 27.6	maxlux 4236.6 690 165.6 41.4
 LED 12W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 759 124.2 27.6 7	maxlux 1131.6 179.4 41.1 11
 LED 12W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 317.4 55.2 12.4 5.4	maxlux 427.6 69 17.8 8.2
 LED 12W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 124.2 19.2 4 1.2	maxlux 165.6 23.4 6.8 2.6
 LED 12W 4000k 30x65°			H(m) 2.0 5.0 10.0 20.0	medlux 2428.8 600.2 149 66.2	maxlux 3001 752 189 84

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
80.8033.A6V12	6X2W	2200K-5700K	Ra>80	1560lm	12W	1246lm	104lm/W	ON/OFF	8°/15°/25°/40°/60°/30°x65°
80.8033.A9V12	9X2W	2200K-5700K	Ra>80	2340lm	18W	1870lm	104lm/W	ON/OFF	8°/15°/25°/40°/60°/30°x65°
80.8033.A6FV12	6X2W	RGB		505lm	12W	402lm	33.6lm/W	DMX512	8°/15°/25°/40°/60°/30°x65°
80.8033.A9FV12	9X2W	RGB		760lm	18W	608lm	33.7lm/W	DMX512	8°/15°/25°/40°/60°/30°x65°

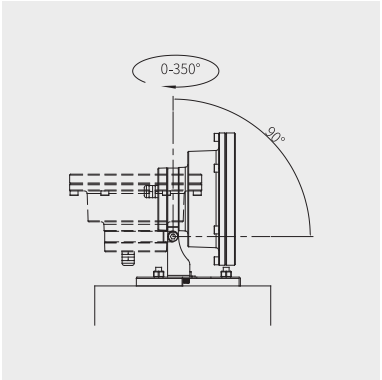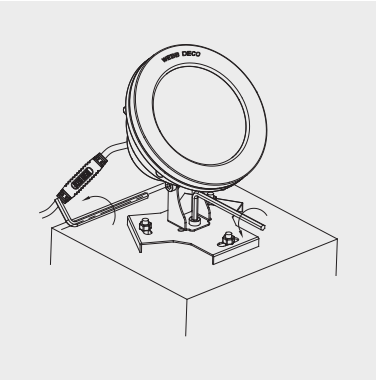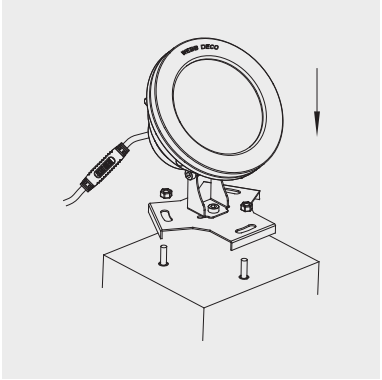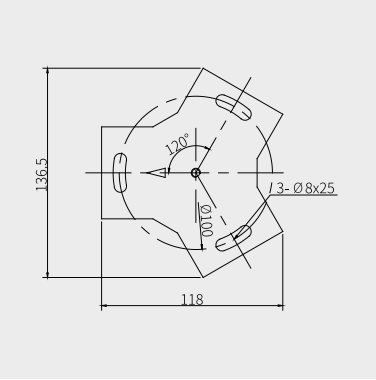Installation :





80.8035



材质: 316L# 不锈钢灯体;
316# 不锈钢紧固螺丝;
硅胶胶圈密封;
铜镀镍防水接头;
5mm 钢化安全玻璃

安装: 适应环境温度: -30°C~ +50°C;
可调角度范围: 垂直方向, 0 ~ 90°; 水平方向, 0 ~ 350°

线材: 单色常亮: 1 条 3 米两芯线, 线径 7.5mm;
DMX512 控制: 1 条 3 米两芯电源线, 线径 7.5mm;
2 条 3 米四芯信号线, 线径 6.5mm

包装: 灯具净重: 3.8kg
内盒尺寸: 245x245x190mm
外箱尺寸: 505x255x405mm
包装容量: 4 灯 / 箱
包装毛重: 16.5kg

Material: 316L stainless steel housing;
316 stainless steel external fasten screws;
Anti-aging waterproof silicone gasket;
5mm clear safety glass

Finishing: Stainless steel

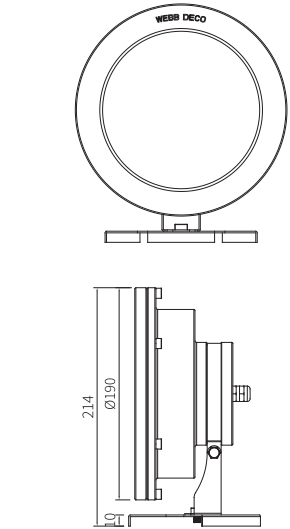
Installation: Ambient temperature: -30°C~ +50°C ;
Tilttable: 0 ~ 90°
Rotation angle:0 ~ 350°
Single color: 1x3m length 2cores Ø7.5mm power supply cable;
DMX512 controllable: 1x3m length 2cores Ø7.5mm power supply cable;
2x3m length 4cores Ø6.5mm signal supply cable;
Nickled plated brass waterproof cable gland













Packaging: Net weight: 3.8kg
Outer carton: 505x255x405mm(4pcs/ctn)



Anti-condensation kit





80.8035



 LED 24W 4000k 8°			H(m) 2.0 5.0 10.0 20.0	medlux 8307.6 1324.8 331.2 82.8	maxlux 13434.4 2180.4 552 138
 LED 24W 4000k 15°			H(m) 2.0 5.0 10.0 20.0	medlux 5768.4 938.4 220.8 55.2	maxlux 8473.2 1380 331.2 82.8
 LED 24W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 1518 248.4 55.2 14	maxlux 2263.2 358.8 82.8 22
 LED 24W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 634.8 110.4 24.8 10.8	maxlux 855.2 138 35.6 16.4
 LED 24W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 248.4 38.4 8 2.4	maxlux 331.2 46.8 13.6 5.2
 LED 24W 4000k 30x65°			H(m) 2.0 5.0 10.0 20.0	medlux 4857.6 1200.4 298 132.4	maxlux 6022 1504 378 168

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
80.8035.A12V12	12X2W	2200K-5700K	Ra>80	3120lm	24W	2490lm	104lm/W	ON/OFF	8°15°25°40°60°30°x65°
80.8035.A18V12	18X2W	2200K-5700K	Ra>80	3120lm	36W	2490lm	104lm/W	ON/OFF	8°15°25°40°60°30°x65°
80.8035.A12FV12	12X2W	RGB		1008lm	24W	806lm	33.6lm/W	DMX512	8°15°25°40°60°30°x65°
80.8035.A18FV12	18X2W	RGB		1512lm	36W	1210lm	33.6lm/W	DMX512	8°15°25°40°60°30°x65°

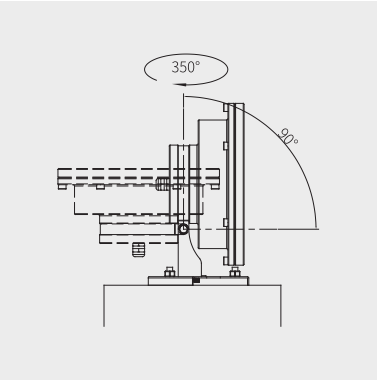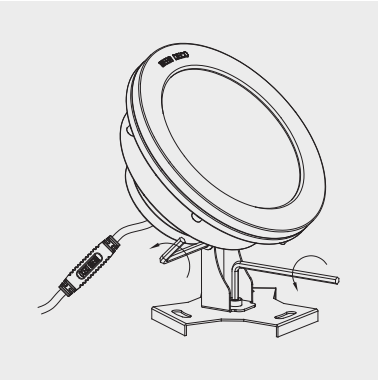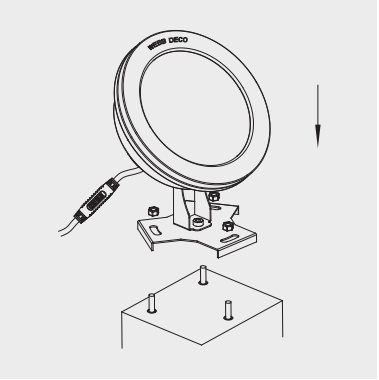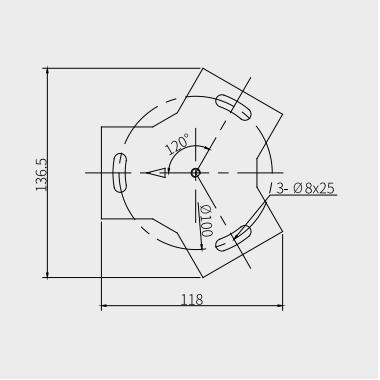Installation:





80.8030R



材质: 316L# 不锈钢灯体;
316# 不锈钢紧固螺丝;
硅胶圈密封;
PP 塑料预埋件;
铜镀镍防水接头;
8mm 钢化安全玻璃

安装: 适应环境温度: -30°C~ +50°C;
可调角度范围: 不可调

线材: 单色常亮: 1 条 3 米两芯线, 线径 7.5mm

包装: 灯具净重: 0.5kg
内盒尺寸: 80x80x100mm
外箱尺寸: 340x340x420mm
包装容量: 64 灯 / 箱
包装毛重: kg

Material: 316L stainless steel housing;
316 stainless steel external fasten screws;
Anti-aging waterproof silicone gasket;
8mm clear safety glass

Finishing: Stainless steel

Installation: Ambient temperature: -30°C~ +50°C
Single color: 1x3m length 2cores Ø7.5mm power supply cable;
Nickled plated brass waterproof cable gland

Packaging: Net weight: 0.5kg
Outer carton: 340x340x420mm(64pcs/ctn)



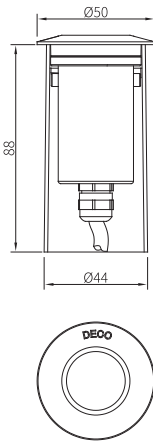
Compact size













Anti-condensation kit





80.8030R



 LED 2.5W 4000k 8°			H(m) 2.0 5.0 10.0 20.0	medlux 903 144 36 9	maxlux 1428 237 60 15
 LED 2.5W 4000k 15°			H(m) 2.0 5.0 10.0 20.0	medlux 627 102 24 6	maxlux 921 150 36 9
 LED 2.5W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 69 12 2.7 1.2	maxlux 93 15 3.9 1.8
 LED 2.5W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 27 4.2 0.9 0.3	maxlux 36 5.1 1.5 0.6
 LED 2.5W 4000k 30x65°			H(m) 2.0 5.0 10.0 20.0	medlux 528 130.5 32.4 14.4	maxlux 654.6 163.5 41.1 18.3

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
80.8030R.A1V12	1X2.5W	2200K-5700K	Ra>80	325lm	2.5W	260lm	104lm/W	ON/OFF	8°/15°/40°/60°/30x65°

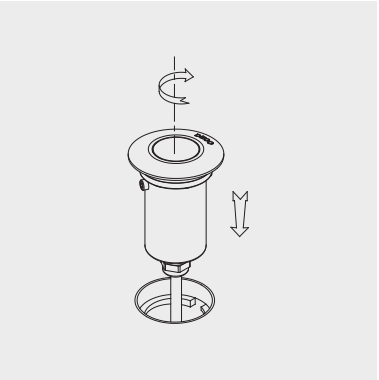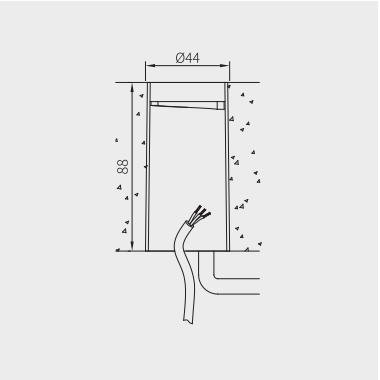Installation:





80.8031R



材质: 316L# 不锈钢灯体;
316# 不锈钢紧固螺丝;
PP 塑料预埋件;
硅胶圈密封;
铜镀镍防水接头;
10mm 钢化安全玻璃

安装: 适应环境温度: -30°C~ +50°C;
可调角度范围: 不可调

线材: 单色常亮: 1 条 3 米两芯线, 线径 7.5mm;
DMX512 控制: 1 条 3 米两芯电源线, 线径 7.5mm;
2 条 3 米四芯信号线, 线径 6.5mm

包装: 灯具净重: 2.1kg
内盒尺寸: 165x165x175mm
外箱尺寸: 510x340x365mm
包装容量: 12 灯 / 箱
包装毛重: 27kg

Material: 316L stainless steel housing;
316 stainless steel external fasten screws;
Anti-aging waterproof silicone gasket;
10mm clear safety glass

Finishing: Stainless steel

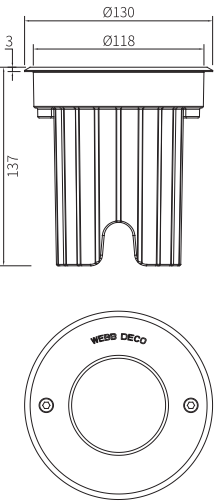
Installation: Ambient temperature: -30°C~ +50°C ;
Single color: 1x3m length 2cores Ø7.5mm power supply cable;
DMX512 controllable: 1x3m length 2cores Ø7.5mm power supply cable;
2x3m length 4cores Ø6.5mm signal supply cable;
Nickled plated brass waterproof cable gland













Packaging: Net weight: 2.1 kg
Outer carton: 510x340x365mm(12pcs/ctn)



Anti-condensation kit



80.8031R



 LED 6W 4000k 8°			H(m) 2.0 5.0 10.0 20.0	medlux 2076.9 331.2 82.8 20.7	maxlux 3408.6 545.1 138 34.5
 LED 6W 4000k 15°			H(m) 2.0 5.0 10.0 20.0	medlux 1442.1 234.6 55.2 13.8	maxlux 2118.3 345 82.8 20.7
 LED 6W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 380 62.5 14 3.9	maxlux 565 90 22 5.8
 LED 6W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 158.7 27.6 6.2 2.7	maxlux 213.8 34.5 8.9 4.1
 LED 6W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 62.1 9.6 2 0.6	maxlux 82.8 11.7 3.4 1.3
 LED 6W 4000k 30x65°			H(m) 2.0 5.0 10.0 20.0	medlux 1214.4 300.1 74.5 33.1	maxlux 1505.5 376 94.5 42

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
80.8031R.A3V12	3X2W	2200k-5700K	Ra>80	780lm	6W	620lm	103lm/W	ON/OFF	8°/15°/25°/40°/60°/30°x65°
80.8031R.A3FV12	3X2W	RGB		252lm	6W	202lm	33.7lm/W	DMX512	8°/15°/25°/40°/60°/30°x65°

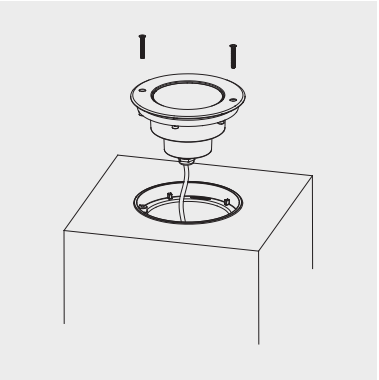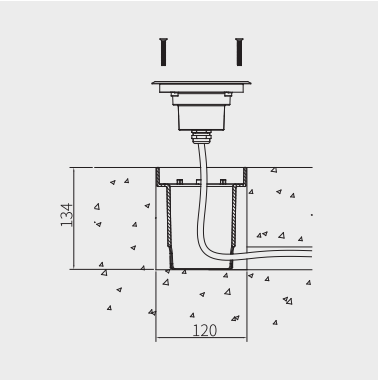Installation:





80.8033R



材质: 316L# 不锈钢灯体;
316# 不锈钢紧固螺丝;
PP 预埋件;
硅胶圈密封;
铜镀镍防水接头;
12mm 钢化安全玻璃

安装: 适应环境温度: -30°C~ +50°C;
可调角度范围: 不可调

线材: 单色常亮: 1 条 3 米两芯线, 线径 7.5mm;
DMX512 控制: 1 条 3 米两芯电源线, 线径 7.5mm;
2 条 3 米四芯信号线, 线径 6.5mm

包装: 灯具净重: 2.9kg
内盒尺寸: 205x205x190mm
外箱尺寸: 420x420x400mm
包装容量: 8 灯 / 箱
包装毛重: 24.8kg

Material: 316L stainless steel housing;
316 stainless steel external fasten screws;
Anti-aging waterproof silicone gasket;
12mm clear safety glass

Finishing: Stainless steel

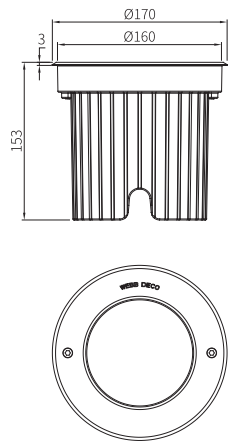
Installation: Ambient temperature: -30°C~ +50°C
Single color: 1x3m length 2cores Ø7.5mm power supply cable;
DMX512 controllable: 1x3m length 2cores Ø7.5mm power supply cable;
2x3m length 4cores Ø6.5mm signal supply cable;
Nickled plated brass waterproof cable gland













Packaging: Net weight: 2.9kg
Outer carton: 420x420x400mm(8pcs/ctn)



Anti-condensation kit



80.8033R



 LED 12W 4000k 8°			H(m) 2.0 5.0 10.0 20.0	medlux 4153.8 662.4 165.6 41.1	maxlux 6717.2 1090.2 276 69
 LED 12W 4000k 15°			H(m) 2.0 5.0 10.0 20.0	medlux 2884.2 469.2 110.4 27.6	maxlux 4236.6 690 165.6 41.4
 LED 12W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 759 124.2 27.6 7	maxlux 1131.6 179.4 41.1 11
 LED 12W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 317.4 55.2 12.4 5.4	maxlux 427.6 69 17.8 8.2
 LED 12W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 124.2 19.2 4 1.2	maxlux 165.6 23.4 6.8 2.6
 LED 12W 4000k 30x65°			H(m) 2.0 5.0 10.0 20.0	medlux 2428.8 600.2 149 66.2	maxlux 3001 752 189 84

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
80.8033R.A6V12	6X2W	2200K-5700K	Ra>80	1560lm	12W	1246lm	104lm/W	ON/OFF	8°/15°/25°/40°/60°/30°x65°
80.8033R.A9V12	9X2W	2200K-5700K	Ra>80	2340lm	18W	1870lm	104lm/W	ON/OFF	8°/15°/25°/40°/60°/30°x65°
80.8033R.A6FV12	6X2W	RGB		505lm	12W	402lm	33.6lm/W	DMX512	8°/15°/25°/40°/60°/30°x65°
80.8033R.A9FV12	9X2W	RGB		760lm	18W	608lm	33.7lm/W	DMX512	8°/15°/25°/40°/60°/30°x65°

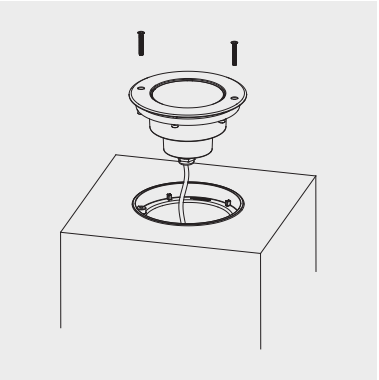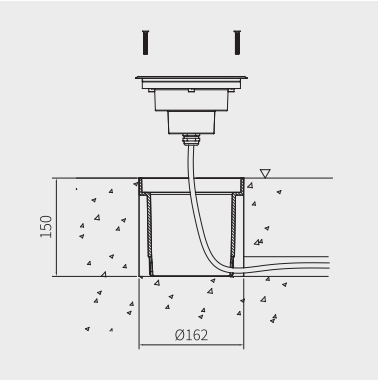Installation:





80.8035R



- 材质：

316L# 不锈钢灯体；
316# 不锈钢紧固螺丝；
PP 塑料预埋件；
硅胶圈圈密封；
铜镀镍防水接头；
12mm 钢化安全玻璃
- 安装：

适应环境温度：-30℃～ +50℃；
可调角度范围：不可调
- 线材：

单色常亮：1 条 3 米两芯线，线径 7.5mm；
DMX512 控制：1 条 3 米两芯电源线，线径 7.5mm；
2 条 3 米四芯信号线，线径 6.5mm
- 包装：

灯具净重：3.8kg
内盒尺寸：245x245x190mm
外箱尺寸：505x255x405mm
包装容量：4 灯 / 箱
包装毛重：16.5kg

- Material:

316L stainless steel housing;
316 stainless steel external fasten screws;
Anti-aging waterproof silicone gasket;
12mm clear safety glass
- Finishing:

Stainless steel
- Installation:

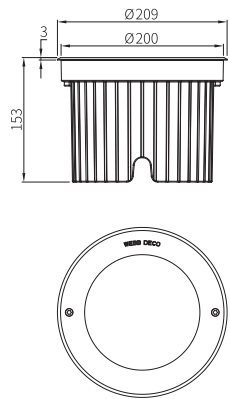
Ambient temperature: -30℃～ +50℃
Single color: 1x3m length 2cores Ø7.5mm power supply cable;
DMX512 controllable: 1x3m length 2cores Ø7.5mm power supply cable;
2x3m length 4cores Ø6.5mm signal supply cable;
Nickled plated brass waterproof cable gland
- Packaging:













Net weight: 3.8kg
Outer carton: 505x255x405mm(4pcs/ctn)



Anti-condensation kit



80.8035R



 LED 24W 4000k 8°			H(m) 2.0 5.0 10.0 20.0	medlux 8307.6 1324.8 331.2 82.8	maxlux 13434.4 2180.4 552 138
 LED 24W 4000k 15°			H(m) 2.0 5.0 10.0 20.0	medlux 5768.4 938.4 220.8 55.2	maxlux 8473.2 1380 331.2 82.8
 LED 24W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 1518 248.4 55.2 14	maxlux 2263.2 358.8 82.8 22
 LED 24W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 634.8 110.4 24.8 10.8	maxlux 855.2 138 35.6 16.4
 LED 24W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 248.4 38.4 8 2.4	maxlux 331.2 46.8 13.6 5.2
 LED 24W 4000k 30x65°			H(m) 2.0 5.0 10.0 20.0	medlux 4857.6 1200.4 298 132.4	maxlux 6022 1504 378 168


Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
80.8035R.A12V12	12X2W	2200K-5700K	Ra>80	3120lm	24W	2490lm	104lm/W	ON/OFF	8°15°25°40°60°30°x65°
80.8035R.A18V12	18X2W	2200K-5700K	Ra>80	3120lm	36W	2490lm	104lm/W	ON/OFF	8°15°25°40°60°30°x65°
80.8035R.A12FV12	12X2W	RGB		1008lm	24W	806lm	33.6lm/W	DMX512	8°15°25°40°60°30°x65°
80.8035R.A18FV12	18X2W	RGB		1512lm	36W	1210lm	33.6lm/W	DMX512	8°15°25°40°60°30°x65°

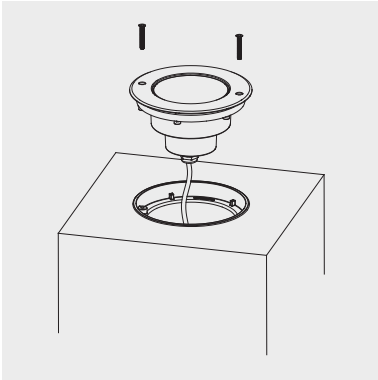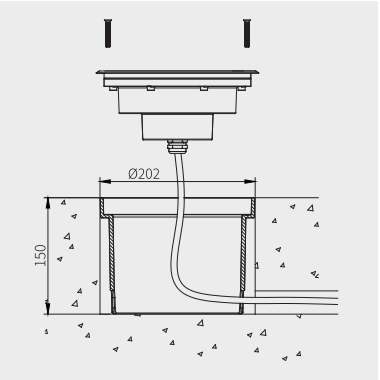Installation:





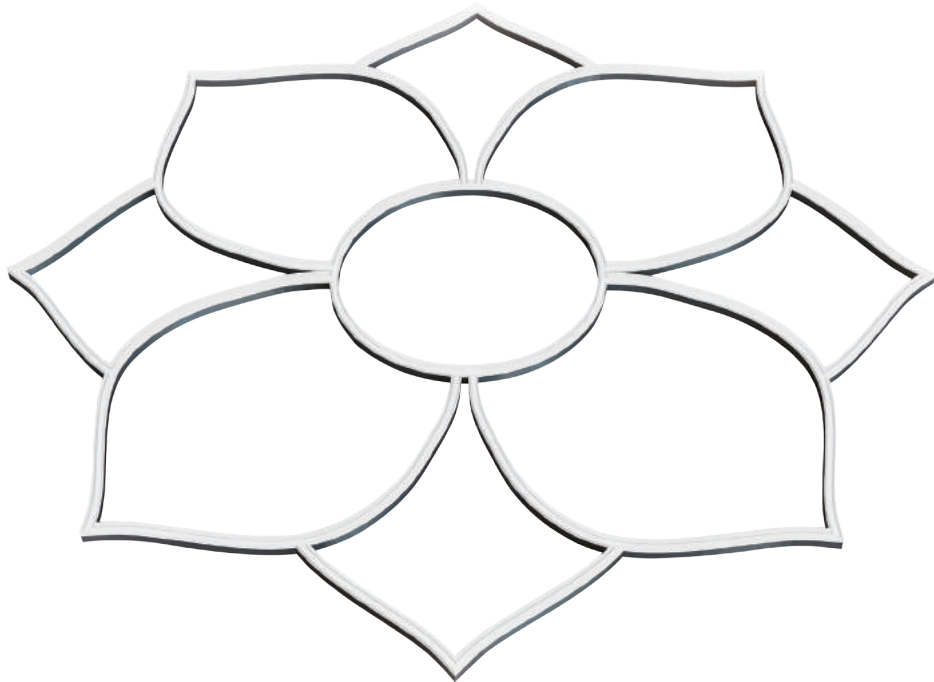80.6023



材质: 304# 不锈钢灯体;
304# 不锈钢紧固螺丝;
特制抗 UV 树脂全灌封;
铜镀镍防水接头

安装: 适应环境温度: -30°C~ +50°C

线材: 1 条两芯电源线, 长度定制, 线径 7.0mm

包装: 包装尺寸

Material: 304 stainless steel housing & external fasten screws;
UV stabilized & special toughened plastic filler

Finishing: Stainless steel

Installation: Ambient temperature: -30°C~ +50°C ;
Single Color: One piece of 1m length 2-cores cable

Packaging: Customization



80.6023-1



80.6023-2



80.6023-3







80.6023-4

80.6023



LED 12W/M
160°



Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
80.6023A.D48V12/M-Ø2850	48x0.23W/M	2200K-5700K	Ra>80	1400lm/M	12W/M	660lm	55lm/W	ON/OFF	160°
80.6023B.D48V12/M-Ø5730	48x0.23W/M	2200K-5700K	Ra>80	1400lm/M	12W/M	650lm	55lm/W	ON/OFF	160°

Installation:

