

WEBB
DECO

WEBB DECO

GENERAL CATALOGUE PROGRAM
2019-2020

LED 壁灯

Wall Luminaires /
Recessed Wall
Luminaires



20.0506S
P_087



20.0506D
P_087



20.0515S
P_091



20.0515D
P_091



20.0507S
P_095



20.0507D
P_095



20.0508S
P_099



20.0508D
P_099



20.0509S
P_103



20.0509D
P_103



20.8503S
P_107



20.8503D
P_107



20.8504S
P_111



20.8504D
P_111



20.0703
P_115



20.0704
P_119



20.0517
P_123



20.0501
P_125



20.3011
P_127



20.3012
P_129



20.3013
P_131



20.3014
P_133



20.4030
P_137



20.4031
P_139



20.4032
P_141



20.4034
P_143



20.4035
P_145




20.4041
P_147




20.4037
P_149




20.T040
P_153

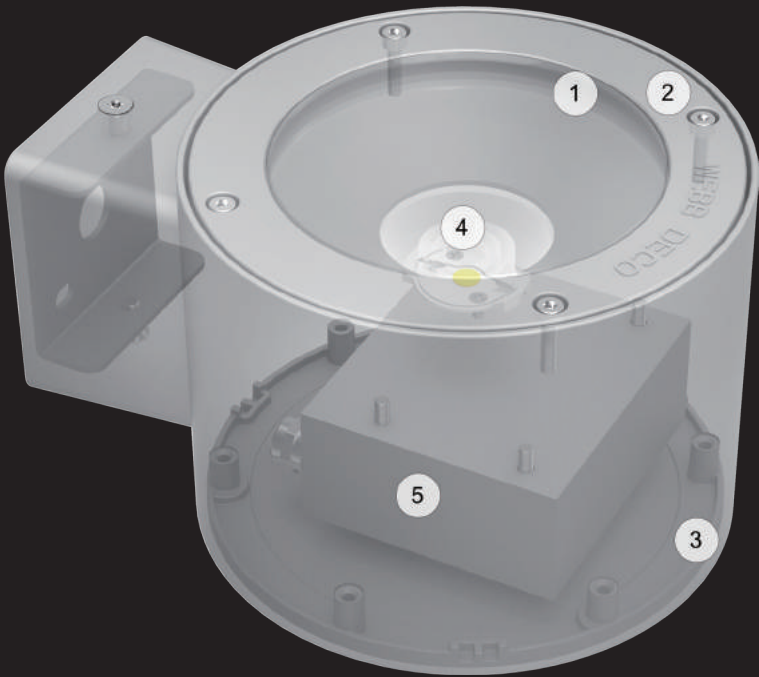


- 1/2. 找平的玻璃与面盖设计
防止上照壁灯积水积尘
- 3. 气体流动散热设计
- 4.COB 光源模组，搭配先进
- 5.Integrated LED driver

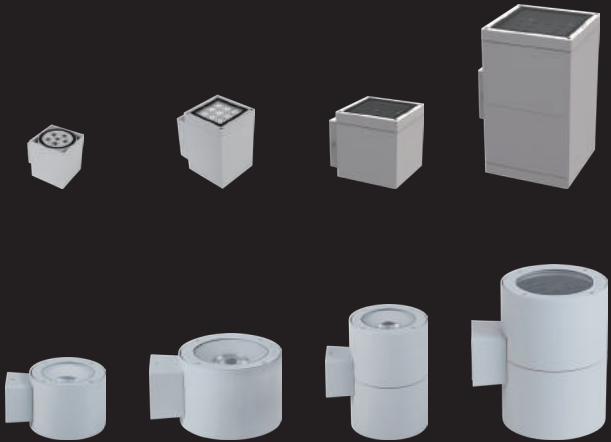

- 方形、圆形家族式经典外观设计
- 单向、双向上下照，大小不同外观尺寸多种选择
- Family range of square and cylinder typical design
- Up/down; up and down options in different

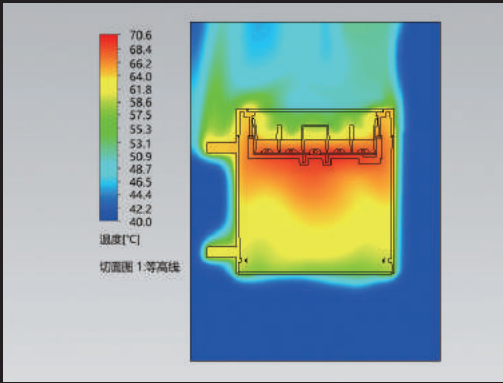

优异的散热性
Excellent heat dissipatio

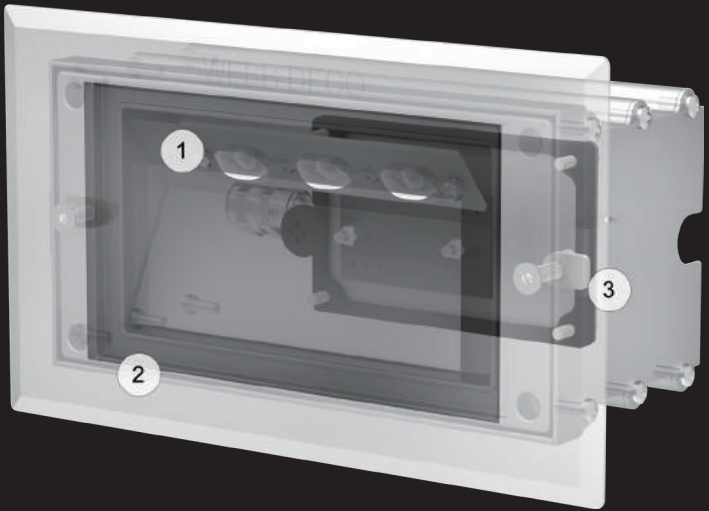


- 1. 深度防眩光源模块
- 2. 安全玻璃与不锈钢防腐面盖
- 3. 紧凑灯体设计，减少开孔
- 1.Deep anti-glare lamp module
- 2.Tempered safety glass with 316 stainless steel trim
- 3.Compact size design reduce the installation depth



多种不同的配光角度选择
Different options of beam
angle light distribution




偏配光设计，适用于人行步道及广场
Asymmetric beam angle improved
visual comfort to the pedestrian



超宽角度配光，最大化灯具安装距离，减少用灯数量
Super-wide light distribution enlarge installation
distance

20.0506S / 20.0506D



材质: ADC12 铝合金灯体、压盖；
304# 不锈钢紧固螺丝；
硅胶密封垫；
铜镀镍防水接头；
3mm 钢化安全玻璃

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度：-30℃～ +50℃；
适应环境湿度：100%；
灯具禁止安装在低洼处

线材: 单色常亮：1 条 0.4 米两 / 三芯电源线，线径 7.0mm；
DMX512 控制：1 条 0.4 米两 / 三芯电源线，线径 7.0mm；
2 条 0.4 米四芯信号线，线径 6.0mm

包装: 20.0506S
灯具净重：0.5kg
外箱尺寸：430x295x250mm （36 灯 / 箱）
20.0506D
灯具净重：0.66kg
外箱尺寸：430x295x350mm （36 灯 / 箱）

Material: ADC12 corrosion-resistant die-cast aluminum housing;
Anti-aging waterproof silicone gasket;
3mm clear safety glass;
304 stainless steel external fasten screws.

Finishing: Double layers of DUPONT UV-resistant polyester powder coating

Installation: Ambient temperature: -30℃～ +50℃ ;
Single color: 1x0.4m length 3-cores Ø7.0mm power supply cable;
DMX512 controllable: 1x0.4m length 3-cores Ø7.0mm power supply cable;
2x0.4m lenght 4-cores Ø6.0mm data cables.
Nickled plated brass waterproof cable gland



Packaging: 20.0506S
Net weight: 0.5kg
Outer carton:430x295x250mm (36pcs/ctn)
20.0506D
Packaging: Net weight: 0.66kg
Outer carton: 430x295x350mm (36pcs/ctn)













No accumulation
of dust & water on
surface glass



20.0506S

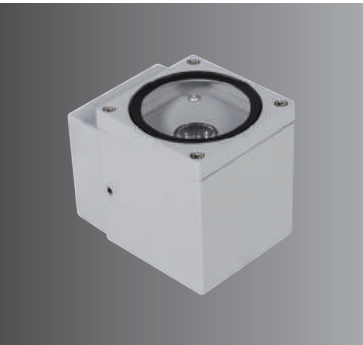












 LED 2.5W 4000k 3°			H(m) 2.0 5.0 10.0 20.0	medlux 2575.4 411.9 101.9 25.7	maxlux 5335.4 853.9 213.3 53.3
 LED 2.5W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 721 117 27.6 6.9	maxlux 1059.2 172.5 41.4 10.4
 LED 2.5W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 189.8 31.1 6.9 1.8	maxlux 282.9 44.9 10.4 2.8
 LED 2.5W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 79.4 11 3.1 1.4	maxlux 106.9 17.3 4.5 1.8
 LED 2.5W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 31 4.2 1 0.3	maxlux 41.4 6 1.4 0.7

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.0506S.A1V12	1X2.5W	2200K-5700K	Ra>80	320lm	2.5W	255lm	102lm/W	ON/OFF	3°/10°/25°/40°/60°/90°
20.0506S.A1V220	1X2.5W	2200K-5700K	Ra>80	320lm	4W	255lm	63lm/W	ON/OFF	3°/10°/25°/40°/60°/90°
20.0506D.A2V12	2X2.5W	2200K-5700K	Ra>80	650lm	2.5W+2.5W	510lm	102lm/W	ON/OFF	3°/10°/25°/40°/60°/90°
20.0506D.A2V220	2X2.5W	2200K-5700K	Ra>80	650lm	4W+4W	510lm	63lm/W	ON/OFF	3°/10°/25°/40°/60°/90°





20.0506D

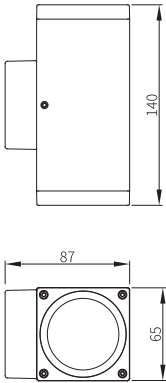


 LED 3W 4000k 3°			H(m) 2.0 5.0 10.0 20.0	medlux 2575.4 411.9 101.9 25.7	maxlux 5335.4 853.9 213.3 53.3
 LED 3W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 721 117 27.6 6.9	maxlux 1059.2 172.5 41.4 10.4
 LED 3W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 189.8 31.1 6.9 1.8	maxlux 282.9 44.9 10.4 2.8
 LED 3W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 79.4 11 3.1 1.4	maxlux 106.9 17.3 4.5 1.8
 LED 3W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 31 4.2 1 0.3	maxlux 41.4 6 1.4 0.7

Installation :

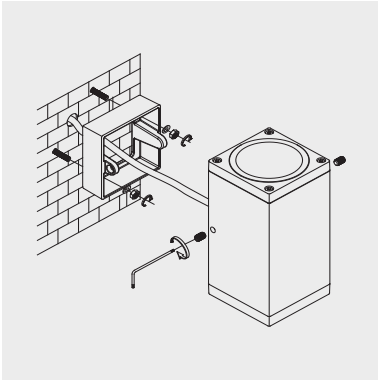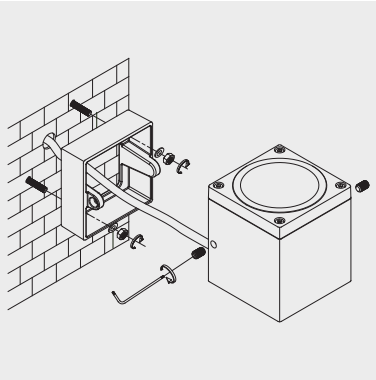

20.0515S / 20.0515D



材质: ADC12 铝合金灯体、压盖；
304# 不锈钢紧固螺丝；
硅胶密封垫；
铜镀镍防水接头；
3mm 钢化安全玻璃

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度：-30℃～ +50℃；
灯具禁止安装在低洼处

线材: 单色常亮：1 条 0.4 米两 / 三芯电源线，线径 7.0mm；
DMX512 控制：1 条 0.4 米两 / 三芯电源线，线径 7.0mm；
2 条 0.4 米四芯信号线，线径 6.0mm

包装: 20.0515S
包装：灯具净重：1.2kg
外箱尺寸：450x305x345mm（12 灯 / 箱）
20.0515D
灯具净重：1.8kg
外箱尺寸：420x300x470mm（12 灯 / 箱）

Material: ADC12 corrosion-resistant die-cast aluminum housing;
Anti-aging waterproof silicone gasket;
3mm clear safety glass;
304 stainless steel external fasten screws

Finishing: Double layers of DUPONT UV-resistant polyester powder coating



Installation: Ambient temperature: -30℃～ +50℃ ;
Single color: 1x0.4m length 3-cores Ø7.0mm power supply cable;
DMX512 controllable: 1x0.4m length 3-cores Ø7.0mm power supply cable;
2x0.4m lenght 4-cores Ø6.0mm data cables.
Nickled plated brass waterproof cable gland









Packaging: 20.0515S
Net weight: 1.2kg
Outer carton: 450x305x345mm (12pcs/ctn)
20.0515D
Net weight: 1.8kg
Outer carton: 420x300x470mm (12pc/ctn)





20.0515S

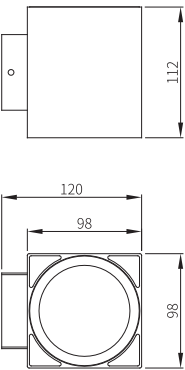
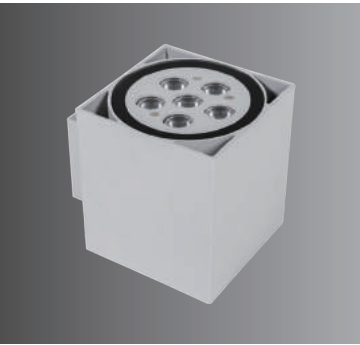










 LED 8W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 1874.7 304.9 71.7 17.9	maxlux 2753.7 448.5 107.6 26.9
 LED 8W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 493.3 80.7 17.9 4.5	maxlux 735.5 116.6 26.9 7.1
 LED 8W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 206.3 35.8 8 3.6	maxlux 278 44.8 11.7 4.5
 LED 8W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 80.7 10.9 2.6 0.6	maxlux 107.6 15.2 4.5 1.8

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.0515S.A4V24	4X2W	2200K-5700K	Ra>80	1040lm	8W	780lm	97.5lm/W	ON/OFF	10°/25°/40°/60°/90°
20.0515S.A4V220	4X2W	2200K-5700K	Ra>80	1040lm	10W	780lm	78lm/W	ON/OFF	10°/25°/40°/60°/90°
20.0515D.A8V24	8X2W	2700K-5700K	Ra>80	2080lm	8W+8W	1600lm	100lm/W	ON/OFF	10°/25°/40°/60°/90°
20.0515D.A8V220	8X2W	2200K-5700K	Ra>80	2080lm	10W+10W	1600lm	80lm/W	ON/OFF	10°/25°/40°/60°/90°




20.0515D

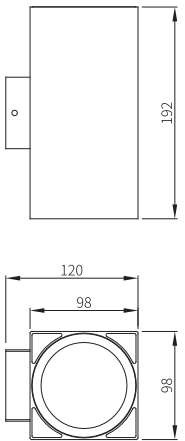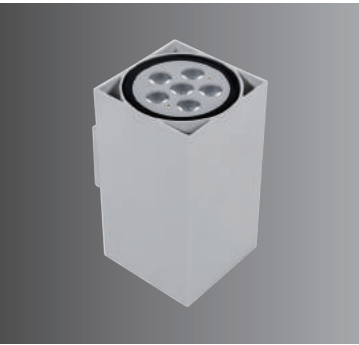


 LED 8W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 1874.7 304.9 71.7 17.9	maxlux 2753.7 448.5 107.6 26.9
 LED 8W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 493.3 80.7 17.9 4.5	maxlux 735.5 116.6 26.9 7.1
 LED 8W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 206.3 35.8 8 3.6	maxlux 278 44.8 11.7 4.5
 LED 8W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 80.7 10.9 2.6 0.6	maxlux 107.6 15.2 4.5 1.8

Installation:

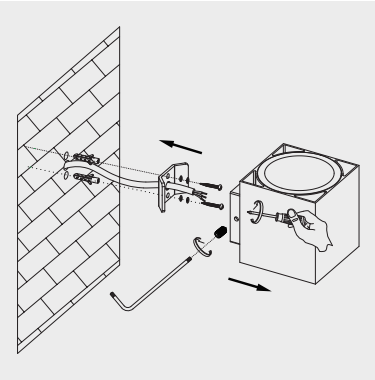

20.0507S / 20.0507D



材质: ADC12 铝合金灯体、压盖；
304# 不锈钢紧固螺丝；
硅胶密封垫；
铜镀镍防水接头；
3mm 钢化安全玻璃

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度：-30℃～ +50℃；
适应环境湿度：100%；
灯具禁止安装在低洼处

线材: 单色常亮：1 条 0.4 米两 / 三芯电源线，线径 7.0mm；
DMX512 控制：1 条 0.4 米两 / 三芯电源线，线径 7.0mm；
2 条 0.4 米四芯信号线，线径 6.0mm


包装: 20.0507S
灯具净重：1.7kg
外箱尺寸：350x320x400mm（8 灯 / 箱）
.....
20.0507D
灯具净重：2.4kg
外箱尺寸：350x320x430mm（8 灯 / 箱）

Material: ADC12 corrosion-resistant die-cast aluminum housing;
Anti-aging waterproof silicone gasket;
3mm clear safety glass;
304 stainless steel external fasten screws

Finishing: Double layers of DUPONT UV-resistant polyester powder coating

Installation: Ambient temperature: -30℃～ +50℃ ;
Single color: 1x0.4m length 3-cores Ø7.0mm power supply cable;
DMX512 controllable: 1x0.4m length 3-cores Ø7.0mm power supply cable;
2x0.4m lenght 4-cores Ø6.0mm data cables.
Nickled plated brass waterproof cable gland



Packaging: 20.0507S
Net weight: 1.7kg
Outer carton:350x320x400mm (8pcs/ctn)
.....
20.0507D
Net weight:2.4kg
Outer carton : 350x320x430mm (8pcs/ctn)

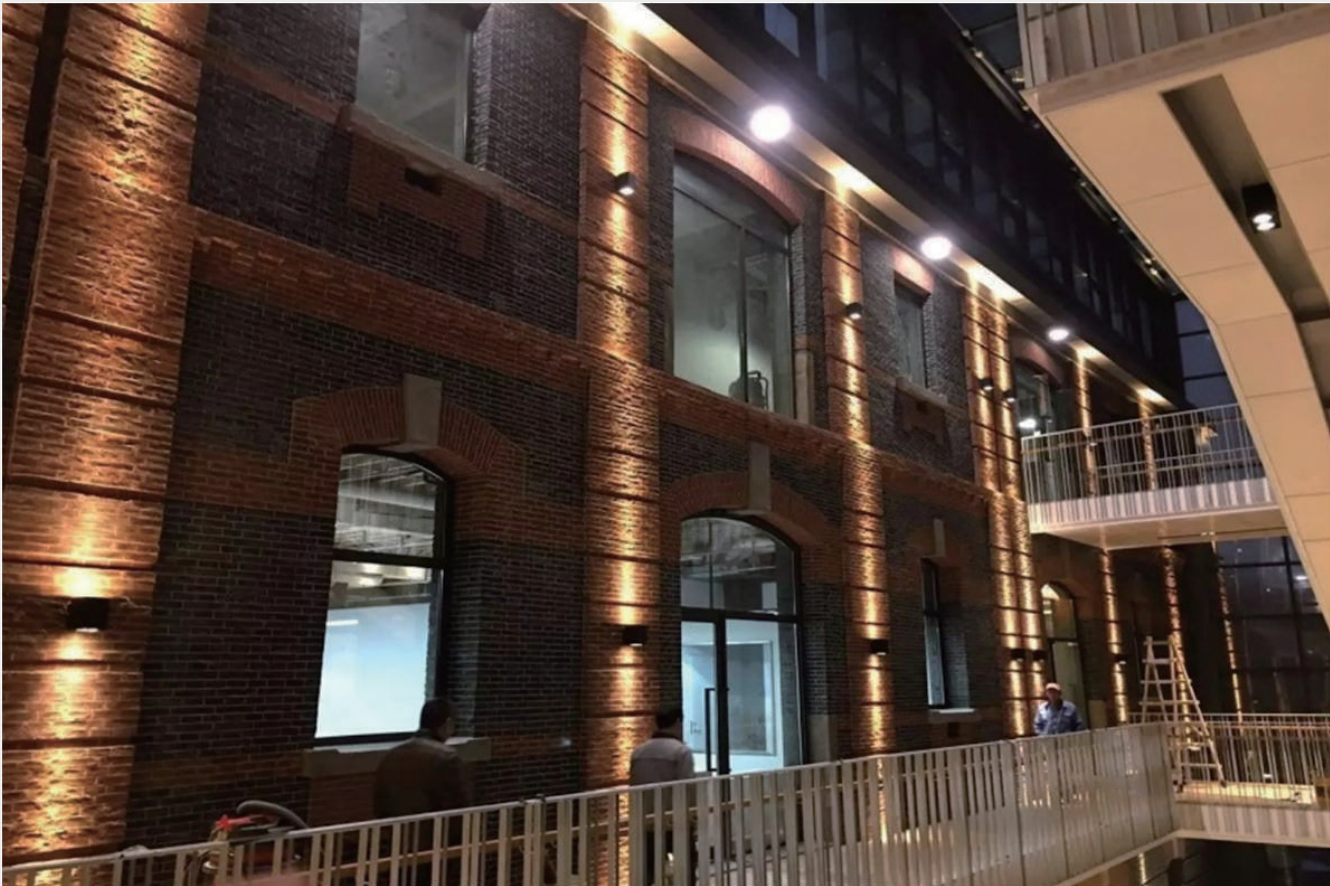

No accumulation
of dust & water on
surface glass



20.0507S

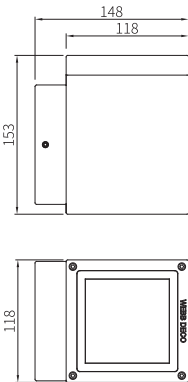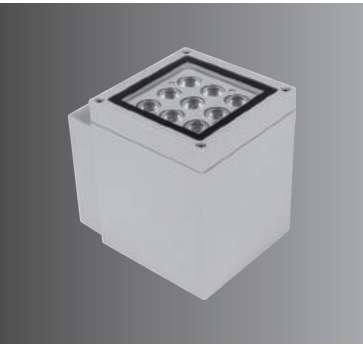


 LED 10W 4000k 8°			H(m) 2.0 5.0 10.0 20.0	medlux 3323.2 529.8 132.4 32.8	maxlux 5453.4 872 220.8 63.2
 LED 10W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 2343.3 381.1 89.6 22.3	maxlux 3442.1 560.6 134.5 33.6
 LED 10W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 616.6 100.8 22.3 5.6	maxlux 919.3 145.7 33.6 8.8
 LED 10W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 257.8 44.7 10 4.5	maxlux 347.5 56 14.6 5.6
 LED 10W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 100.8 13.6 3.2 0.75	maxlux 134.5 19 5.6 2.2

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.0507S.A9V12	9X1.1W	2700K-5700K	Ra>80	1300lm	10W	975lm	97.5lm/W	ON/OFF	10°
20.0507S.A9V220	9X1.1W	2200K-5700K	Ra>80	1300lm	12.5W	975lm	78lm/W	ON/OFF	10°
20.0507S.D9V24	9X1.1W	2700K-5700K	Ra>80	1230lm	10W	900lm	90lm/W	ON/OFF	15°/25°/40°/60°/90°
20.0507S.D9V220	9X1.1W	2200K-5700K	Ra>80	1230lm	12.5W	900lm	72lm/W	ON/OFF	15°/25°/40°/60°/90°
20.0507D.A18V12	18X1.1W	2700K-5700K	Ra>80	2600lm	10W+10W	1950lm	97.5lm/W	ON/OFF	10°
20.0507D.A18V220	18X1.1W	2200K-5700K	Ra>80	2600lm	12W+12W	1950lm	82lm/W	ON/OFF	10°
20.0507D.D18V24	18X1.1W	2700K-5700K	Ra>80	2475lm	10W+10W	1850lm	92.5lm/W	ON/OFF	15°/25°/40°/60°/90°
20.0507D.D18V220	18X1.1W	2200K-5700K	Ra>80	2475lm	12W+12W	1850lm	77lm/W	ON/OFF	15°/25°/40°/60°/90°





20.0507D

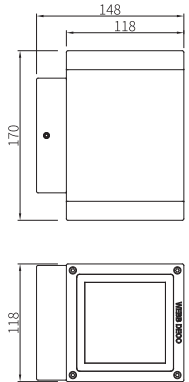

 LED 10W 4000k 8°			H(m) 2.0 5.0 10.0 20.0	medlux 3323.2 529.8 132.4 32.8	maxlux 5453.4 872 220.8 63.2
 LED 10W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 2343.3 381.1 89.6 22.3	maxlux 3442.1 560.6 134.5 33.6
 LED 10W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 616.6 100.8 22.3 5.6	maxlux 919.3 145.7 33.6 8.8
 LED 10W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 257.8 44.7 10 4.5	maxlux 347.5 56 14.6 5.6
 LED 10W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 100.8 13.6 3.2 0.75	maxlux 134.5 19 5.6 2.2

Installation :

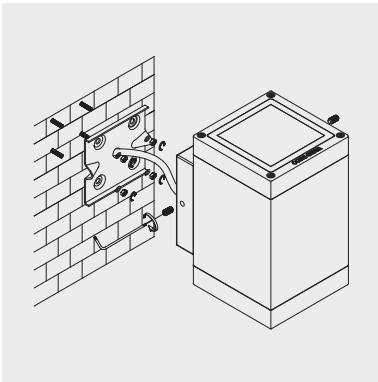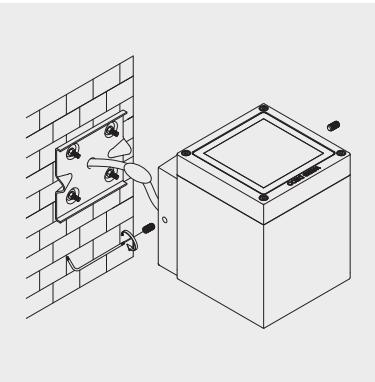

20.0508S / 20.0508D



材质: ADC12 铝合金灯体、压盖;
304# 不锈钢紧固螺丝;
硅胶密封垫;
铜镀镍防水接头;
3mm 钢化安全玻璃

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30°C~ +50°C;
适应环境湿度: 100%;
灯具禁止安装在低洼处

线材: 单色常亮: 1 条 0.4 米两 / 三芯电源线, 线径 7.0mm;
DMX512 控制: 1 条 0.4 米两 / 三芯电源线, 线径 7.0mm;
2 条 0.4 米四芯公母接头线, 线径 6.0mm

包装: 20.0508S
灯具净重: 2.5kg
外箱尺寸: 350x320x400mm (8 灯 / 箱)
20.0508D
灯具净重: 4.5kg
外箱尺寸: 425x405x355mm (4 灯 / 箱)

Material: ADC12 corrosion-resistant die-cast aluminum housing;
Anti-aging waterproof silicone gasket;
3mm clear safety glass;
304 stainless steel external fasten screws

Finishing: Double layers of DUPONT UV-resistant polyester powder coating

Installation: Ambient temperature: -30°C~ +50°C ;
Single color: 1x0.4m length 3-cores Ø7.0mm power supply cable;
DMX512 controllable: 1x0.4m length 3-cores Ø7.0mm power supply cable;
2x0.4m length 4-cores Ø6.0mm data cables.
Nickled plated brass waterproof cable gland



Packaging: 20.0508S
Net weight: 2.5kg
Outer carton: 350x320x400mm(8pcs/ctn)
20.0508D
Net weight: 4.5kg
Outer carton: 425x405x355mm(4pcs/ctn)



No accumulation
of dust & water on
surface glass



20.0508S

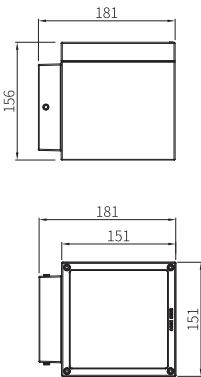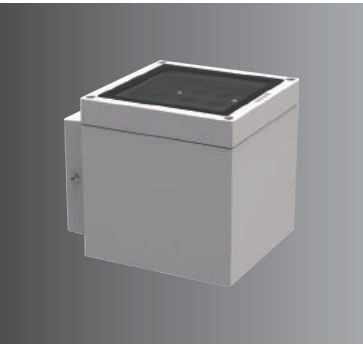


 LED 24W 4000k 8°			H(m) 2.0 5.0 10.0 20.0	medlux 7975.6 1271.5 317.7 78.7	maxlux 13088.1 2092.8 528 151.6
 LED 24W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 5623.9 914.6 215 53.5	maxlux 8261 1345.4 322.8 80.6
 LED 24W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 1479.8 214.9 53.5 13.4	maxlux 2206.3 349.6 80.6 21.1
 LED 24W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 618.7 107.2 24 10.8	maxlux 834 134.4 35 13.4
 LED 24W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 241.9 32.6 7.6 1.8	maxlux 322.8 45.6 13.4 5.2

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.0508S.A16V24	16X1.6W	2700K-5700K	Ra>80	3380lm	26W	2535lm	97.5lm/W	ON/OFF	7°/10°
20.0508S.A16V220	16X1.3W	2200K-5700K	Ra>80	2704lm	27W	2028lm	77lm/W	ON/OFF	7°/10°
20.0508S.D24V24	24X1W	2700K-5700K	Ra>80	3000lm	24W	2300lm	95.8lm/W	ON/OFF	15°/25°/40°/60°/90°
20.0508S.D24V220	24X1W	2200K-5700K	Ra>80	3000lm	27W	2300lm	85lm/W	ON/OFF	15°/25°/40°/60°/90°
20.0508D.A32V24	32X1.5W	2200K-5700K	Ra>80	6400lm	24W+24W	5000lm	104lm/W	ON/OFF	7°/10°
20.0508D.A32V220	32X1.5W	2200K-5700K	Ra>80	6400lm	27W+27W	5000lm	92.5lm/W	ON/OFF	7°/10°
20.0508D.D48V24	48X1W	2200K-5700K	Ra>80	6000lm	24W+24W	4500lm	93.6lm/W	ON/OFF	15°/25°/40°/60°/90°
20.0508D.D48V220	48X1W	2200K-5700K	Ra>80	6000lm	27W+27W	4500lm	83.5lm/W	ON/OFF	15°/25°/40°/60°/90°




20.0508D

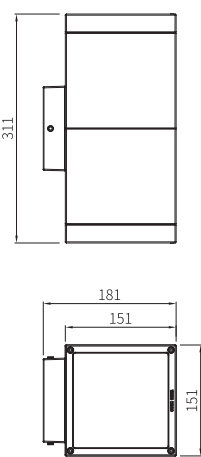

 LED 24W 4000k 8°			H(m) 2.0 5.0 10.0 20.0	medlux 7975.6 1271.5 317.7 78.7	maxlux 13088.1 2092.8 528 151.6
 LED 24W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 5623.9 914.6 215 53.5	maxlux 8261 1345.4 322.8 80.6
 LED 24W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 1479.8 214.9 53.5 13.4	maxlux 2206.3 349.6 80.6 21.1
 LED 24W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 618.7 107.2 24 10.8	maxlux 834 134.4 35 13.4
 LED 24W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 241.9 32.6 7.6 1.8	maxlux 322.8 45.6 13.4 5.2

Installation:

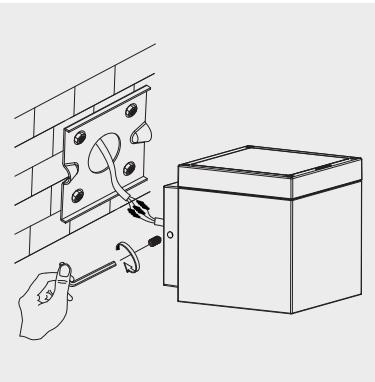

20.0509S / 20.0509D



- 材质：


ADC12 铝合金灯体、压盖；
304# 不锈钢紧固螺丝；
硅胶密封垫；
铜镀镍防水接头；
4mm 钢化安全玻璃
- 表面处理：

双层耐侯耐腐蚀静电粉末喷涂
- 安装：

适应环境温度：-30℃～ +50℃；
灯具禁止安装在低洼处
- 线材：

单色常亮： 1 条 0.4 米两 / 三芯电源线，线径 7.0mm；
DMX512 控制： 1 条 0.4 米两 / 三芯电源线，线径 7.0mm；
2 条 0.4 米四芯信号线，线径 6.0mm
- 包装：

20.0509S
灯具净重： 4.2kg
外箱尺寸： 470x240x420mm （4 灯 / 箱）
.....
20.0509D
灯具净重： 6.3kg
外箱尺寸： 255x230x365mm （1 灯 / 箱）



- Material:

ADC12 corrosion-resistant die-cast aluminum housing;
Anti-aging waterproof silicone gasket;
3mm clear safety glass;
304 stainless steel external fasten screws
- Finishing:

Double layers of DUPONT UV-resistant polyester powder coating
- Installation:

Ambient temperature: -30℃～ +50℃ ;
Single color: 1x0.4m length 3-cores Ø7.0mm power supply cable;
DMX512 controllable: 1x0.4m length 3-cores Ø7.0mm power supply cable;
2x0.4m lenght 4-cores Ø6.0mm data cables.
Nickled plated brass waterproof cable gland
- Packaging:



20.0509S
Net weigth:4.2kg
Outer carton 470x240x420mm(4pcs/ctn)
.....
20.0509D
Net weight: 6.3kg
Outer carton :255x230x365mm(1pc/ctn)



No accumulation
of dust & water on
surface glass



20.0509S

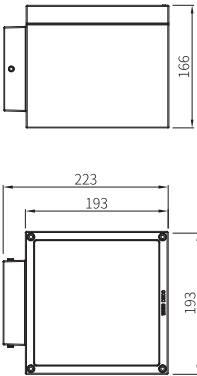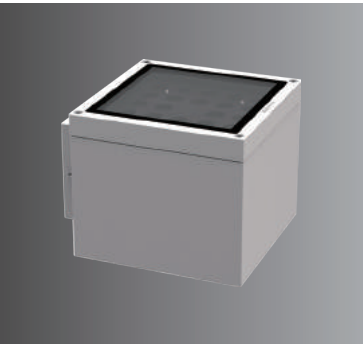


 LED 36W 4000k 6°			H(m) 2.0 5.0 10.0 20.0	medlux 12462 1987.2 496.8 124.2	maxlux 20451 3270.6 828 237
 LED 36W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 8435.8 137.1 322.5 80.2	maxlux 12391.5 2018.1 484.2 120.9
 LED 36W 4000k 15°			H(m) 2.0 5.0 10.0 20.0	medlux 5411 865.3 216.7 53.8	maxlux 7879.8 1261.3 314.6 80
 LED 36W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 2219.7 322.3 80.2 20.1	maxlux 3309.4 524.4 120.9 30.1
 LED 36W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 928 160.8 36 16.2	maxlux 125.1 201.6 52.5 20.1
 LED 36W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 362.8 48.9 11.4 2.7	maxlux 484.2 68.4 20.1 7.8

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.0509S.A24V36	24x1.5W	2700K-5700K	Ra>80	4680lm	36W	3510lm	97.5lm/W	ON/OFF	7°/10°
20.0509S.A24V220	24X1.5W	2200K-5700K	Ra>80	4680lm	40W	3510lm	87.5lm/W	ON/OFF	7°/10°
20.0509S.D36V24	36X1W	2700K-5700K	Ra>80	4500lm	36W	3350lm	93lm/W	ON/OFF	15°/25°/40°/60°/90°
20.0509S.D36V220	36X1W	2200K-5700K	Ra>80	4500lm	40W	3350lm	83.5lm/W	ON/OFF	15°/25°/40°/60°/90°
20.0509D.D72V220	72x1W	2200K-5700K	Ra>80	9000lm	40W+40W	6700lm	83.7lm/W	ON/OFF	15°/25°/40°/60°/90°
20.0509D.A48V220	48X1.5W	2200K-5700K	Ra>80	9360lm	40W+40W	7480lm	93.5lm/W	ON/OFF	7°/10°




20.0509D

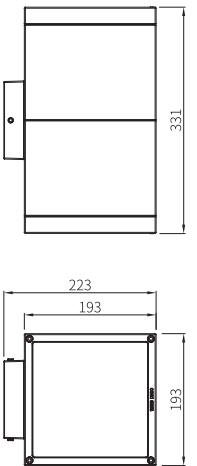


 LED 36W 4000k 6°			H(m) 2.0 5.0 10.0 20.0	medlux 12462 1987.2 496.8 124.2	maxlux 20451 3270.6 828 237
 LED 36W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 8435.8 137.1 322.5 80.2	maxlux 12391.5 2018.1 484.2 120.9
 LED 36W 4000k 15°			H(m) 2.0 5.0 10.0 20.0	medlux 5411 865.3 216.7 53.8	maxlux 7879.8 1261.3 314.6 80
 LED 36W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 2219.7 322.3 80.2 20.1	maxlux 3309.4 524.4 120.9 30.1
 LED 36W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 928 160.8 36 16.2	maxlux 125.1 201.6 52.5 20.1
 LED 36W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 362.8 48.9 11.4 2.7	maxlux 484.2 68.4 20.1 7.8

Installation:

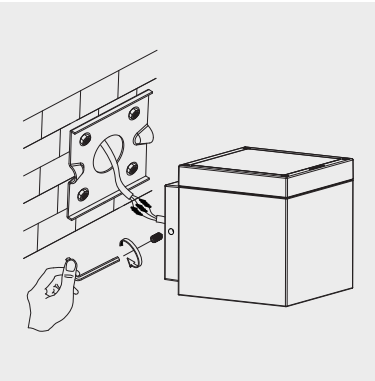

20.8503S / 20.8503D



材质: ADC12 铝合金灯体;
304# 不锈钢紧固螺丝;
硅胶密封垫;
铜镀镍防水接头;
3mm 钢化安全玻璃

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30°C~ +50°C;
可调角度范围: 不可调;
灯具禁止安装在低洼处

线材: 单色常亮: 1 条 0.4 米两 / 三芯电源线, 线径 7.0mm;
DMX512 控制: 1 条 0.4 米两 / 三芯电源线, 线径 7.0mm;
2 条 0.4 米四芯信号线, 线径 6.0mm

包装: 20.8503S
灯具净重: 2.5kg
外箱尺寸: 445x385x320mm (8 灯 / 箱)
20.8503D
灯具净重: 4kg
外箱尺寸: 445x385x275mm (4 灯 / 箱)

Material: ADC12 corrosion-resistant die-cast aluminum housing;
3mm clear safety glass;
Anti-aging waterproof silicone gasket;
304 stainless steel external fasten screws

Finishing: Double layers of DUPONT UV-resistant polyester powder coating

Installation: Ambient temperature: -30°C~ +50°C ;
Single color: 1x0.5m length 2-cores Ø7.0mm power supply cables;
Nickled plated brass waterproof cable gland


Packaging: 20.8503S
Net weight: 2.5kg
Outer carton: 445x385x320mm(8pcs/ctn)
20.8503D
Net weight: 4kg
Outer carton: 445x385x275mm(4pcs/ctn)



No accumulation
of dust & water on
surface glass



20.8503S

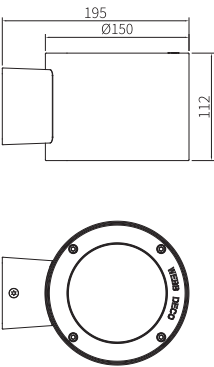


 LED 24W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 5624.1 914.7 215.1 53.7	maxlux 8261.1 1345.5 322.8 80.7
 LED 24W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 1479.9 242.1 53.7 13.5	maxlux 2206.5 349.8 80.7 21.3
 LED 24W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 618.9 107.4 24 10.8	maxlux 834 134.4 35.1 13.5
 LED 24W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 242.1 32.7 7.8 1.8	maxlux 322.8 45.6 13.5 5.4

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.8503S.A12V24	12x2W	2200K-5700K	Ra>80	3120lm	24W	2440lm	101.5lm/W	ON/OFF	10°/25°/40°/60°
20.8503S.A12V220	12x2W	2200K-5700K	Ra>80	3120lm	26W	2440lm	90lm/W	ON/OFF	10°/25°/40°/60°
20.8503S.A12FV24	12x2W	RGB		1008lm	24W	780lm	32.5lm/W	DMX512	10°/25°/40°/60°
20.8503S.B1V220	1x20W	2700K-5700K	Ra>80	2700lm	24W	2100lm	105lm/W	ON/OFF	12°/24°/36°
20.8503D.A24V220	24X1.9W	2200K-5700K	Ra>80	5930lm	26W+26W	4700lm	90lm/W	ON/OFF	10°/25°/40°/60°
20.8503D.B2V220	2X20W	2700K-5700K	Ra>80	5700lm	24W+24W	4520lm	94lm/W	ON/OFF	12°/25°/40°




20.8503D

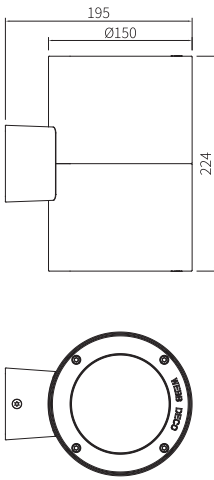


 LED 24W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 5624.1 914.7 215.1 53.7	maxlux 8261.1 1345.5 322.8 80.7
 LED 24W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 1479.9 242.1 53.7 13.5	maxlux 2206.5 349.8 80.7 21.3
 LED 24W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 618.9 107.4 24 10.8	maxlux 834 134.4 35.1 13.5
 LED 24W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 242.1 32.7 7.8 1.8	maxlux 322.8 45.6 13.5 5.4

Installation:

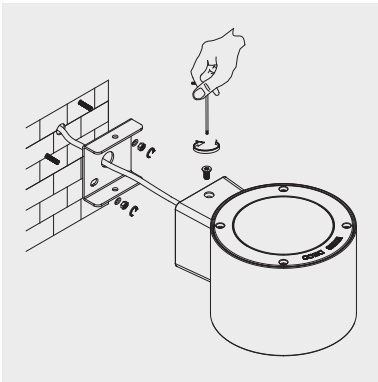

20.8504S / 20.8504D



- 材质:** ADC12 铝合金灯体;
304# 不锈钢紧固螺丝;
硅胶密封垫;
铜镀镍防水接头;
4mm 钢化安全玻璃
- 表面处理:** 双层耐侯耐腐蚀静电粉末喷涂
- 安装:** 适应环境温度: -30℃~ +50℃;
可调角度范围: 不可调;
灯具禁止安装在低洼处
- 线材:** 单色常亮: 1 条 0.4 米三芯电源线, 线径 7.0mm;
DMX512 控制: 1 条 0.4 米三芯电源线, 线径 7.0mm;
2 条 0.4 米四芯信号线, 线径 6.0mm
- 包装:** 20.8504S
灯具净重: 4kg
外箱尺寸: 565x485x185mm (4 灯 / 箱)
20.8504D
灯具净重: 6.5kg
外箱尺寸: 275x235x315mm (1 灯 / 箱)


- Material:** ADC12 corrosion-resistant die-cast aluminum housing;
3mm clear safety glass;
Anti-aging waterproof silicone gasket;
304 stainless steel external fasten screws
- Finishing:** Double layers of DUPONT UV-resistant polyester powder coating
- Installation:** Ambient temperature: -30℃~ +50℃ ;
Single color: 1x0.5m length 2-cores Ø7.0mm power supply cables
Nickled plated brass waterproof cable gland
- Packaging:** 20.8504S
Net weight: 4kg
Outer carton: 565x485x185mm(4pcs/ctn)
20.8504D
Net weight: 6.5kg
Outer carton: 275x235x315mm(1pc/ctn)











No accumulation
of dust & water on
surface glass



20.8504S

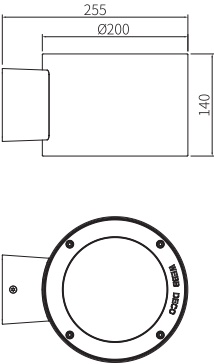










 LED 36W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 8436.1 1372 322.6 80.5	maxlux 12391.6 2018.2 484.2 121
 LED 36W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 2219.8 363.1 80.5 20.2	maxlux 3309.7 524.7 121 31.9
 LED 36W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 928.3 161.1 36 16.2	maxlux 1251 201.6 52.6 20.2
 LED 36W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 363.1 49 11.7 2.7	maxlux 4848.2 68.4 20.2 8.1

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.8504S.A18V220	18X1.8W	2200K-5700K	Ra>80	4200lm	36W	3320lm	92.4lm/W	ON/OFF	10°/25°/40°/60°
20.8504S.A18FV220	18X1.8W	RGB		1360lm	36W	1080lm	30lm/W	DMX512	10°/25°/40°/60°
20.8504S.B1V220	1X31W	2700K-5700K	Ra>80	4180lm	36W	3310lm	91.8lm/W	ON/OFF	12°/25°/40°
20.8504D.A36V220	36X1.75W	2200K-5700K	Ra>80	8190lm	35W+35W	6242.5lm	89lm/W	ON/OFF	10°/25°/40°/60°
20.8504D.A36FV220	36X1.75W	RGB		2650lm	35W+35W	1985lm	28.5lm/W	DMX512	10°/25°/40°/60°
20.8504D.B2V220	2X31W	2700K-5700K	Ra>80	8350lm	35W+35W	6550lm	94.5lm/W	ON/OFF	12°/25°/40°




20.8504D

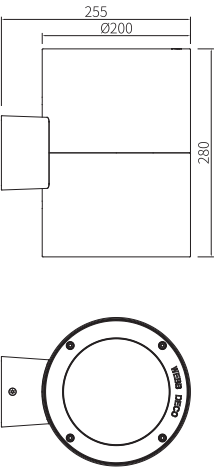

 LED 36W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 8436.1 1372 322.6 80.5	maxlux 12391.6 2018.2 484.2 121
 LED 36W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 2219.8 363.1 80.5 20.2	maxlux 3309.7 524.7 121 31.9
 LED 36W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 928.3 161.1 36 16.2	maxlux 1251 201.6 52.6 20.2
 LED 36W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 363.1 49 11.7 2.7	maxlux 4848.2 68.4 20.2 8.1

Installation:

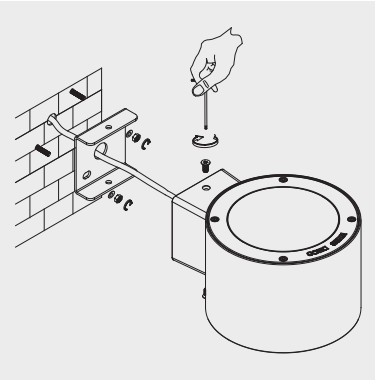



20.0703



材质: ADC12 铝合金灯体、压盖；
3.0mm304# 不锈钢面板；
硅胶密封垫；
铜镀镍防水接头；
6mm 钢化安全玻璃；
304# 不锈钢紧固螺丝

表面处理: 双层耐候耐腐蚀静电粉末喷涂

安装: 适应环境温度：-30℃～ +50℃；
灯具禁止安装在低洼处

线材: 单色常亮： 1 条 0.4 米两 / 三芯电源线，线径 7.0mm；
DMX512 控制： 1 条 0.4 米两 / 三芯电源线，线径 7.0mm；
2 条 0.4 米四芯信号线，线径 6.0mm

包装: 灯具净重： 2.5kg
内盒尺寸： 200x200x115mm
外箱尺寸： 415x415x255mm
包装容量： 8 灯 / 箱
包装毛重： 21kg

Material: ADC12 corrosion-resistant die-cast aluminum housing;
Anti-aging waterproof silicone gasket;
6mm clear safety glass;
304/316 stainless steel front cover & external fasten screws


Finishing: Double layers of DUPONT UV-resistant polyester powder coating

Installation: Ambient temperature: -30℃～ +50℃ ;
Single color: 1x0.4m length 3-cores Ø7.0mm power supply cable;
DMX512 controllable: 1x0.4m length 3-cores Ø7.0mm power supply cable;
2x0.4m lenght 4-cores Ø6.0mm data cables.
Nickled plated brass waterproof cable gland


Packaging: Net weight: 2.5kg
Outer carton: 415x415x255mm(8pcs/ctn)



Flush mounting &
Covered mounting





Maximum luminaire
spacing



20.0703





LED 9W
4000k
60°x90°




H(m)	medlux	maxlux
2.0	93.6	268.7
5.0	23.7	67.2
10.0	5.9	16.7
20.0	2.7	7.8

LED 9W
4000k
80°x135°




H(m)	medlux	maxlux
2.0	84.1	241.7
5.0	21.2	60.4
10.0	5.2	15.6

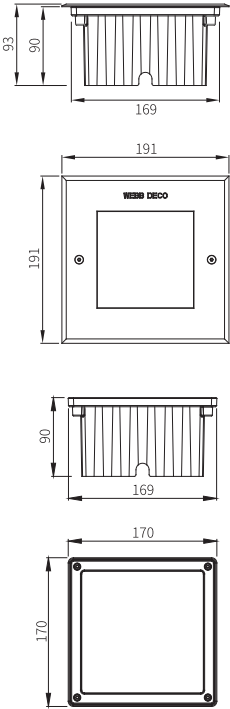

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.0703.A4V24	4X2.2W	2200K-5700K	Ra>80	1170lm	9W	878lm	97.5lm/W	ON/OFF	60°x90°/Asymmetric 80°x135°
20.0703.A4V220	4X2.2W	2200K-5700K	Ra>80	1170lm	11.5W	878lm	76lm/W	ON/OFF	60°x90°/Asymmetric 80°x135°

Installation:

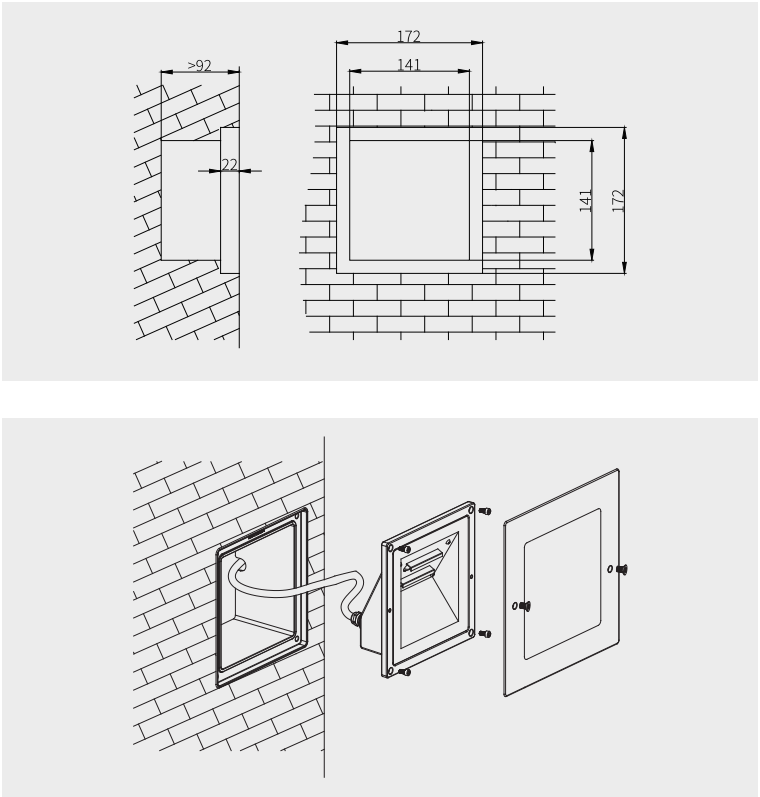



20.0704



材质: ADC12 铝合金灯体、压盖；
3.0mm304# 不锈钢面板；
硅胶密封垫；
铜镀镍防水接头；
6mm 钢化安全玻璃；
304# 不锈钢紧固螺丝

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度：-30℃～ +50℃；
灯具禁止安装在低洼处

线材: 单色常亮： 1 条 0.4 米两 / 三芯电源线，线径 7.0mm；
DMX512 控制： 1 条 0.4 米两 / 三芯电源线，线径 7.0mm；
2 条 0.4 米四芯信号线，线径 6.0mm



包装: 灯具净重： 1.4kg
内盒尺寸： 225x140x105mm
外箱尺寸： 530x255x220mm
包装容量： 8 灯 / 箱
包装毛重： 12.5kg

Material: ADC12 corrosion-resistant die-cast aluminum housing;
Anti-aging waterproof silicone gasket;
6mm clear safety glass;
304/316 stainless steel front cover & external fasten screws

Finishing: Double layers of DUPONT UV-resistant polyester powder coating

Installation: Ambient temperature: -30℃～ +50℃ ;
Single color: 1x0.4m length 3-cores Ø7.0mm power supply cable;
DMX512 controllable: 1x0.4m length 3-cores Ø7.0mm power supply cable;
2x0.4m lenght 4-cores Ø6.0mm data cables.
Nickled plated brass waterproof cable gland

Packaging: Net weight: 1.4kg
Outer carton: 530x225x220mm(8pcs/ctn)





Maximum luminaire spacing


20.0704



LED 6W
4000k
80°x135°




H(m)	medlux	maxlux
2.0	56.1	161.1
5.0	14.1	40.2
10.0	3.5	10.4




Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.0704.A3V12	3X2W	2200K-5700K	Ra>80	780lm	6W	585lm	97.5lm/W	ON/OFF	Asymmetric 80°x135°
20.0704.A3V220	3X2W	2200K-5700K	Ra>80	780lm	8W	585lm	73lm/W	ON/OFF	Asymmetric 80°x135°

Installation:

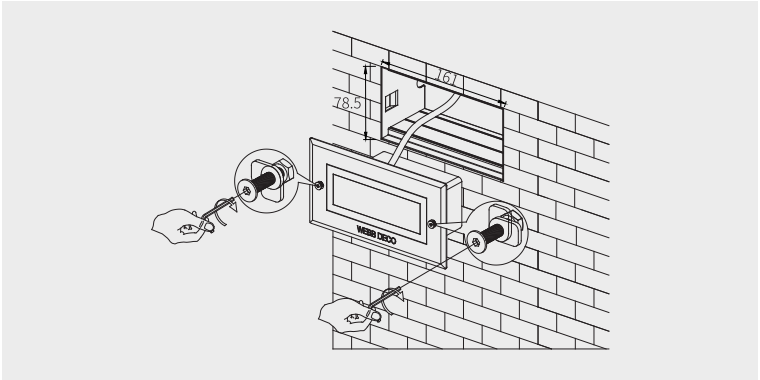



20.0517



材质: ADC12 铝合金灯体、压盖；
304# 不锈钢紧固螺丝；
硅胶密封垫；
铜镀镍防水接头；
3mm 钢化安全玻璃

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度：-30℃～ +50℃；
灯具禁止安装在低洼处

线材: 单色常亮： 1 条 0.4 米三芯电源线，线径 7.0mm；
DMX512 控制： 1 条 0.4 米三芯电源线，线径 7.0mm；
2 条 0.4 米四芯信号线，线径 6.0mm

包装: 灯具净重： 2.2kg
内盒尺寸： 215x200x215mm
外箱尺寸： 445x415x450mm
包装容量： 8 灯 / 箱
包装毛重： 19kg


Material: ADC12 corrosion-resistant die-cast aluminum housing;
Anti-aging waterproof silicone gasket;
3mm clear safety glass;
304 stainless steel external fasten screws

Finishing: Double layers of DUPONT UV-resistant polyester powder coating


Installation: Ambient temperature: -30℃～ +50℃ ;
Single color: 1x0.4m length 3-cores Ø7.0mm power supply cable;
DMX512 controllable: 1x0.4m length 3-cores Ø7.0mm power supply cable;
2x0.4m lenght 4-cores Ø6.0mm data cables.
Nickled plated brass waterproof cable gland

Packaging: Net weight: 2.2kg
Outer carton: 445x415x450mm(8pcs/ctn)

20.0517

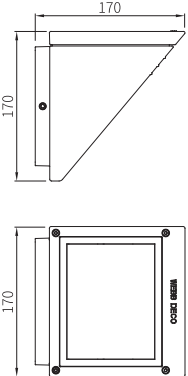

Installation:

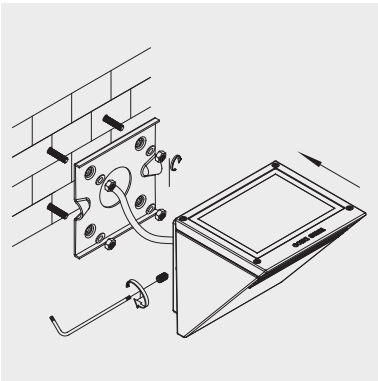


 LED 20W 4000k 7°			H(m) 2.0 5.0 10.0 20.0	medlux 6646.6 1059.8 264.9 66.2	maxlux 13787.5 1744.3 441.6 126.4
 LED 20W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 4686.7 762.2 179.2 44.7	maxlux 6884.2 1121.2 269 67.2
 LED 20W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 1233.2 201.7 44.7 11.2	maxlux 1838.7 291.5 67.2 17.7
 LED 20W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 515.7 89.5 20 9	maxlux 695 112 29.2 11.2
 LED 20W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 201.7 27.2 6.5 1.5	maxlux 269 38 11.2 4.5
 LED 20W 4000k 80x120°			H(m) 2.0 5.0 10.0 20.0	medlux 22.4 56.4 14.1 3.5	maxlux 638.4 82.3 20.5 4.5

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.0517.A10V220	10X2W	2200K-5700K	Ra>80	2600lm	24W	2070lm	86.5lm/W	ON/OFF	7°/10°/25°/40°/60°/ Asymmetric 80×120°
20.0517.A10CV220	10X2W	2200K-5700K	Ra>80	2600lm	24W	2070lm	86.5lm/W	DMX512	7°/10°/25°/40°/60°/ Asymmetric 80×120°
20.0517.A15FV220	15X1.33W	RGB		850lm	24W	680lm	28.6lm/W	DMX512	7°/10°/25°/40°/60°/ Asymmetric 80×120°



20.0501



材质: ADC12 铝合金灯体;
304# 不锈钢紧固螺丝;
硅胶密封垫;
铜镀镍防水接头;
4mm 钢化安全玻璃

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30℃~ +50℃;
灯具禁止安装在低洼处

线材: 单色常亮: 1 条 0.4 米三芯电源线, 线径 7.5mm;
DMX512 控制: 1 条 0.4 米三芯电源线, 线径 7.5mm;
2 条 0.4 米四芯信号线, 线径 6.0mm

包装: 灯具净重: 10.5kg
外箱尺寸: 310x310x340mm
包装容量: 1 灯 / 箱
包装毛重: 11kg



Material: ADC12 corrosion-resistant die-cast aluminum housing;
304 stainless steel external fasten screws;
Anti-aging waterproof silicone gasket;
4mm clear safety glass

Finishing: Double layers of DUPONT UV-resistant polyester powder coating

Installation: Ambient temperature: -30℃~ +50℃ ;
Single color: 1x0.4m length 3-cores Ø7.5mm power supply cable;
DMX512 controllable: 1x0.4m length 3-cores Ø7.5mm power supply cable;
2x0.4m lenght 4-cores Ø6.0mm data cables.
Nickled plated brass waterproof cable gland

Packaging: Net weight: 10.5kg
Outer carton: 310x310x340mm (1pc/ctn)

20.0501

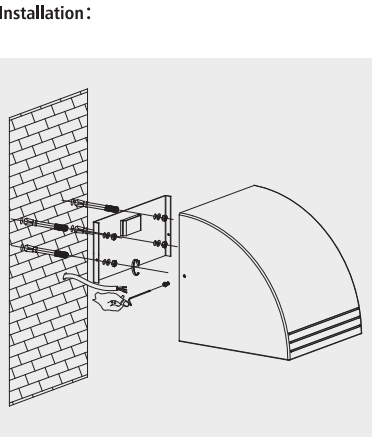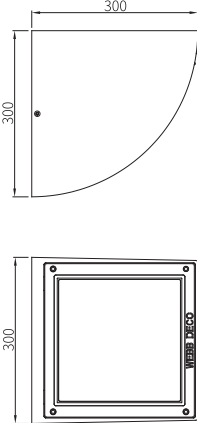

 LED 52W 4000k 6°			H(m) 2.0 5.0 10.0 20.0	medlux 19462 3187 764 184.2	maxlux 31451 4706 1228 337
 LED 52W 4000k 10°			H(m) 2.0 5.0 10.0 20.0	medlux 8435.8 137.1 322.5 80.2	maxlux 12391.5 2018.1 484.2 120.9
 LED 52W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 2219.7 322.3 80.2 20.1	maxlux 3309.4 524.4 120.9 30.1
 LED 52W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 928 160.8 36 16.2	maxlux 125.1 201.6 52.5 20.1
 LED 52W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 362.8 48.9 11.4 2.7	maxlux 484.2 68.4 20.1 7.8

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.0501.A24V220	24X2W	2200K-5700K	Ra>80	6350lm	53W	4700lm	90lm/W	ON/OFF	6°/10°/25°/40°/60°
20.0501.A24CV220	24X2W	2200K-5700K	Ra>80	6350lm	53W	4700lm	90lm/W	DMX512	6°/10°/25°/40°/60°
20.0501.A24FV220	24X2W	RGB		2060lm	53W	1600lm	30lm/W	DMX512	6°/10°/25°/40°/60°
20.0501.A24SV220	24X2W	RGBW		2850lm	53W	2150lm	42lm/W	DMX512	6°/10°/25°/40°/60°



20.3011




材质: ADC12 铝合金灯体;
304# 不锈钢紧固螺丝;
硅胶密封垫;
铜镀镍防水接头;
抗 UV PC 胶罩

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30℃~ +50℃;
可调角度范围: 水平方向, 不可调; 垂直方向, 0 ~ 90°
灯具禁止安装在低洼处

线材: 单色常亮: 1 条 0.4 米两 / 三芯电源线, 线径 7.0mm

包装: 灯具净重: 0.36kg
内盒尺寸: 100x60x65mm
外箱尺寸: 420x260x220mm
包装容量: 48 灯 / 箱
包装毛重: 18.5kg




Material: ADC12 corrosion-resistant die-cast aluminum housing;
Anti-aging waterproof silicone gasket;
Anti-UV PC diffuser;
304 stainless steel external fasten screws

Finishing: Double layers of DUPONT UV-resistant polyester powder coating



Installation: Ambient temperature: -30℃~ +50℃ ;
Tilttable: 0 ~ 90° ;
Single color: 1x0.4m length 3-cores Ø7.0mm power supply cable;
Nickled plated brass waterproof cable gland

Packaging: Net weight: 0.36kg
Outer carton: 420x260x220mm(48pcs/ctn)

20.3011





LED 4.5W
4000k
10X80°



H(m)	medlux	maxlux
2.0	1232.5	1633.5
5.0	306.9	405.5
10.0	74.4	102.3
20.0	34.2	45.5


LED 4.5W
4000k
20X60°



H(m)	medlux	maxlux
2.0	950.4	1178.2
5.0	234.9	294.3
10.0	58.3	74
20.0	26	33

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.3011.A3V12	3X1.5W	2200K-5700K	Ra>80	585lm	4.5W	438lm	97.5lm/W	ON/OFF	10°x80°/20°x60°

Installation:

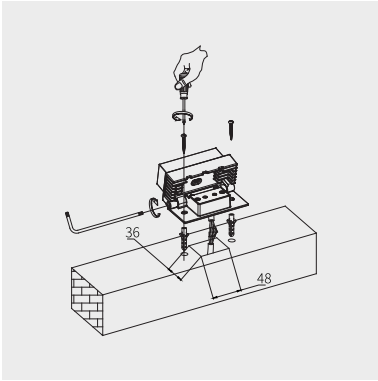



20.3012



- 材质：


ADC12 铝合金灯体；
304# 不锈钢紧固螺丝；
硅胶密封垫；
铜镀镍防水接头；
抗 UV PC 胶罩
- 表面处理：

双层耐侯耐腐蚀静电粉末喷涂
- 安装：

适应环境温度：-30℃～ +50℃；
可调角度范围：水平方向，不可调；垂直方向，0 ～ 90°
灯具禁止安装在低洼处
- 线材：

单色常亮： 1 条 0.4 米两 / 三芯电源线，线径 7.0mm
- 包装：

灯具净重： 0.7kg
内盒尺寸： 195x100x110mm
外箱尺寸： 415x405x355mm
包装容量： 24 灯 / 箱
包装毛重： 18kg



- Material:


ADC12 corrosion-resistant die-cast aluminum housing;
Anti-aging waterproof silicone gasket;
Anti-UV PC diffuser;
304 stainless steel external fasten screws
- Finishing:

Double layers of DUPONT UV-resistant polyester powder coating
- Installation:



Ambient temperature: -30℃～ +50℃ ;
Tilttable: 0 ～ 90° ;
Single color: 1x0.4m length 3-cores Ø7.0mm power supply cable;
Nickled plated brass waterproof cable gland
- Packaging:

Net weight: 0.7kg
Outer carton: 415x405x355mm(24pcs/ctn)

20.3012





LED 6W
4000k
10X150°



H(m)	medlux	maxlux
2.0	1195.2	1584
5.0	297.7	393.2
10.0	72.1	99.2
20.0	33.1	44.1


LED 6W
4000k
20X150°



H(m)	medlux	maxlux
2.0	1045.8	1386
5.0	260.5	344.1
10.0	63.1	86.8
20.0	28.9	38.6


Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.3012.A3V12	3X2W	2200K-5700K	Ra>80	780lm	6W	585lm	97.5lm/W	ON/OFF	10°x150°/20°x150°
20.3012.A3V220	3X2W	2200K-5700K	Ra>80	780lm	8W	585lm	73.1lm/W	ON/OFF	10°x150°/20°x150°

Installation：

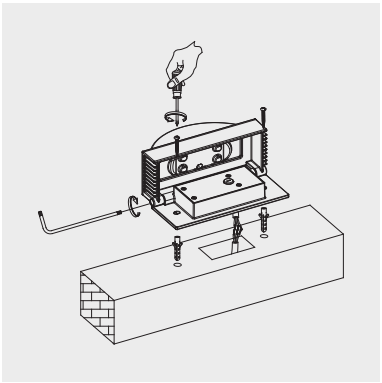



20.3013



- 材质：


ADC12 铝合金灯体；
304# 不锈钢紧固螺丝；
硅胶密封垫；
铜镀镍防水接头；
3mm 钢化安全玻璃
- 表面处理：

双层耐侯耐腐蚀静电粉末喷涂
- 安装：

适应环境温度：-30℃～+50℃；
可调角度范围：水平方向，不可调；垂直方向，不可调
灯具禁止安装在低洼处
- 线材：

单色常亮： 1 条 0.4 米两 / 三芯电源线，线径 7.0mm
- 包装：

灯具净重： 0.55kg
内盒尺寸： 125x105x100mm
外箱尺寸： 440x390x325mm
包装容量： 36 灯 / 箱
包装毛重： 21kg



- Material:


ADC12 corrosion-resistant die-cast aluminum housing;
Anti-aging waterproof silicone gasket;
3mm clear safety glass;
304 stainless steel external fasten screws
- Finishing:

Double layers of DUPONT UV-resistant polyester powder coating
- Installation:



Ambient temperature: -30℃～+50℃ ;
Single color: 1x0.4m length 3-cores Ø7.0mm power supply cable;
Nickled plated brass waterproof cable gland
- Packaging:

Net weight: 0.55kg
Outer carton: 440x390x325mm(36pcs/ctn)

20.3013


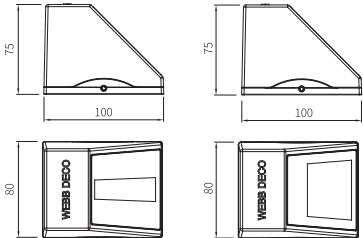


LED 3W
4000k
10X80°



H(m)	medlux	maxlux
2.0	821.3	1088.5
5.0	204	270.3
10.0	49.3	68.2
20.0	22.8	30.3



LED 3W
4000k
80x135°



H(m)	medlux	maxlux
2.0	28	80.5
5.0	7	20.1
10.0	1.8	5.2
20.0	0.7	2.3

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.3013.A1V12	1X2.5W	2200K-5700K	Ra>80	315lm	2.5W	240lm	97lm/W	ON/OFF	10°x150°/20°x150°
20.3013.A1V220	1X2.5W	2200K-5700K	Ra>80	315lm	3.5W	240lm	68.5lm/W	ON/OFF	10°x150°/20°x150°

Installation：

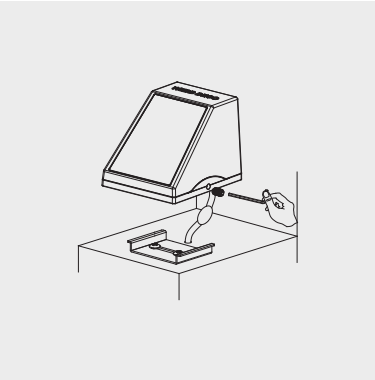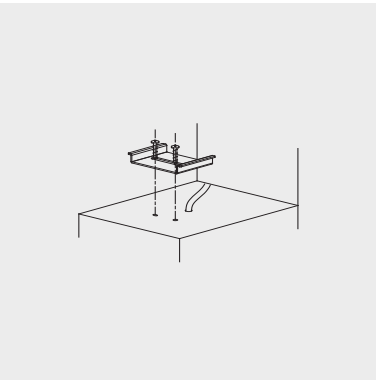



20.3014



材质: ADC12 铝合金灯体、压盖；
304# 不锈钢紧固螺丝；
硅胶密封垫；
铜镀镍防水接头；
3mm 钢化安全玻璃


表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度：-30℃～ +50℃；
可调角度范围：水平方向，不可调；垂直方向，不可调
灯具禁止安装在低洼处



线材: 单色常亮： 1 条 0.4 米两 / 三芯电源线，线径 7.0mm；
DMX512 控制： 1 条 0.4 米两 / 三芯电源线，线径 7.0mm；
2 条 0.4 米四芯信号线，线径 6.0mm

包装: 灯具净重： 1.6kg
内盒尺寸： 232x53x143mm
外箱尺寸： 440x235x295mm
包装容量： 16 灯 / 箱
包装毛重： 27kg

20.3014




LED 9W
4000k
8°x170°



H(m)	medlux	maxlux
2.0	4830	6523
5.0	1205.3	1651
10.0	295.2	402.1
20.0	130.7	186.3

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.3014.A6V24	6X1.5W	2200K-5700K	Ra>80	1170lm	9W	877lm	97.5lm/W	ON/OFF	8°x170°
20.3014.A6V220	6X1.5W	2200K-5700K	Ra>80	877.5lm	11.5W	875lm	74lm/W	ON/OFF	8°x170°
20.3014.A9FV24	9X1W	RGB		378lm	9W	283.5lm	31.5lm/W	DMX512	8°x170°
20.3014.A9FV220	9X1W	RGB		378lm	11.5W	283lm	24.6lm/W	DMX512	8°x170°

Installation:

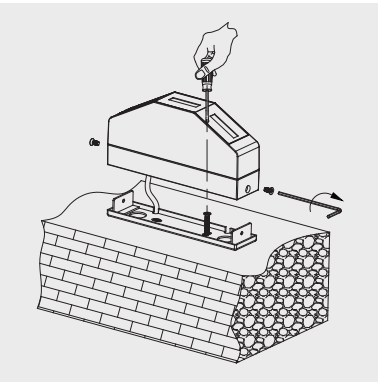



重庆·力帆中心
Lifan Center · Chongqin



20.4030



- 材质：

6063 铝合金型材；
304# 不锈钢紧固螺丝；
硅胶密封垫；
铜镀镍防水接头；
抗 UV PC 胶罩
- 安装：

适应环境温度：-30℃～ +50℃；
可调角度范围：不可调；
灯具禁止安装在低洼处
- 线材：

单色常亮：2 条 0.2 米两芯公母接头线，线径 7.0mm；
DMX512 控制：2 条 0.2 米六芯公母接头线，线径 7.5mm
- 包装：

灯具净重：0.2kg
内盒尺寸：75x55x150mm
外箱尺寸：315x235x325mm
包装容量：32 灯 / 箱
包装毛重：7.4kg

- Material:


Corrosion-resistant aluminum housing;
Anti-aging waterproof silicone gasket;
Anti-UV PC diffuser;
304 stainless steel external fasten screws
- Finishing:

Double layers of DUPONT UV-resistant polyester powder coating
- Installation:


Ambient temperature: -30℃～ +50℃ ;
Single color: 2x0.2m length 2-cores Ø7.0mm power supply cable with waterproof connector;
DMX512 controllable: 2x0.2m length 6-cores Ø7.5mm cable with waterproof connector;
Nickled plated brass waterproof cable gland
- Packaging:

Net weight: 0.2kg
Outer carton: 315x235x325mm(32pcs/ctn)

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.4030.D9V12	9x0.3W	2700K-5700K	Ra>80	345lm	2.7W	260lm	96lm/W	ON/OFF	150°
20.4030.D9SV15	6x0.2W+3X0.2W	RGBW		103lm	1.8W	58lm	32lm/W	DMX512	150°
20.4030.D9FV12	9x0.2W	RGB		75lm	1.8W	41lm	23lm/W	DMX512	150°

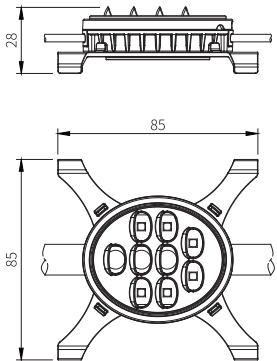

Installation：

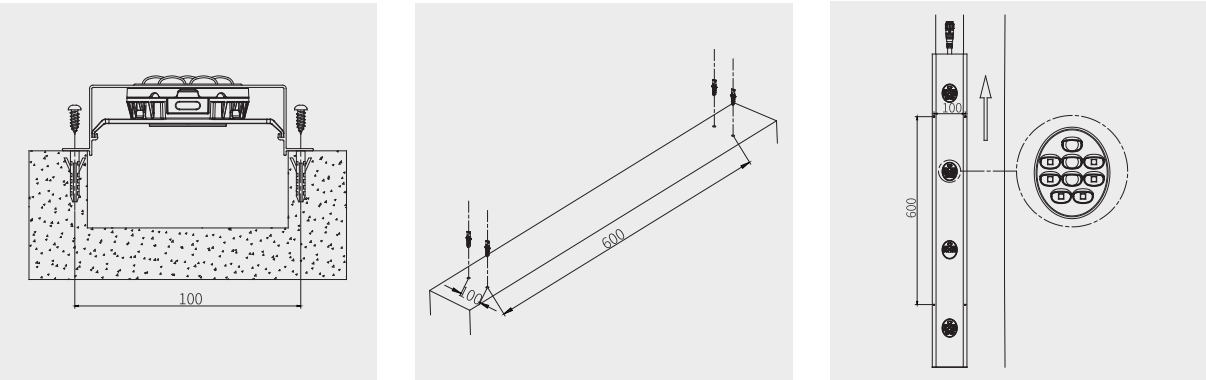



20.4031




材质: ADC12 铝合金灯体;
304# 不锈钢紧固螺丝;
硅胶密封垫;
铜镀镍防水接头;
抗 UV PC 胶罩

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30℃~ +50℃;
可调角度范围: 不可调;
灯具禁止安装在低洼处

线材: 单色常亮: 2 条 0.2 米两芯公母接头线, 线径 7.0mm;
DMX512 控制: 1 条 0.4 米两芯电源线, 线径 7.0mm;
2 条 0.2 米四芯公母接头线, 线径 6.0mm

包装: 灯具净重: 0.2kg
内盒尺寸: 75x55x150mm
外箱尺寸: 315x235x325mm
包装容量: 32 灯 / 箱
包装毛重: 7.4kg



Material: ADC12 corrosion-resistant die-cast aluminum housing;
Anti-UV PC diffuser;
Anti-aging waterproof silicone gasket;
304 stainless steel external fasten screws

Finishing: Double layers of DUPONT UV-resistant polyester powder coating


Installation: Ambient temperature: -30℃~ +50℃ ;
Single color: 2x0.2m length 2-cores Ø7.0mm power supply cable with waterproof connector;
DMX512 controllable: 1x0.4m length 2-cores Ø7.0mm power supply cable & 2x0.2m length 4-cores Ø6.0mm data cables with waterproof connector;
Nickled plated brass waterproof cable gland

Packaging: Net weight: 0.2kg
Outer carton: 315x235x325mm(32pcs/ctn)


Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.4031.D1V12	1X1W	2700K-5700K	Ra>80	125lm	1W	95lm	95lm/W	ON/OFF	150°
20.4031.D9SV24	6x0.22W+3X0.2W	RGBW	Ra>80	115lm	2W	90lm	45lm/W	DMX512	150°



IP68 Waterproof male-female connector

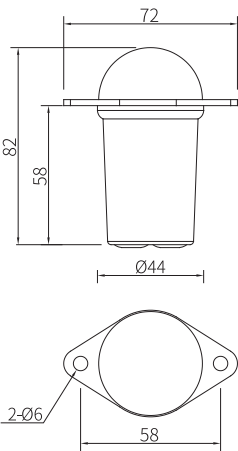


Installation :

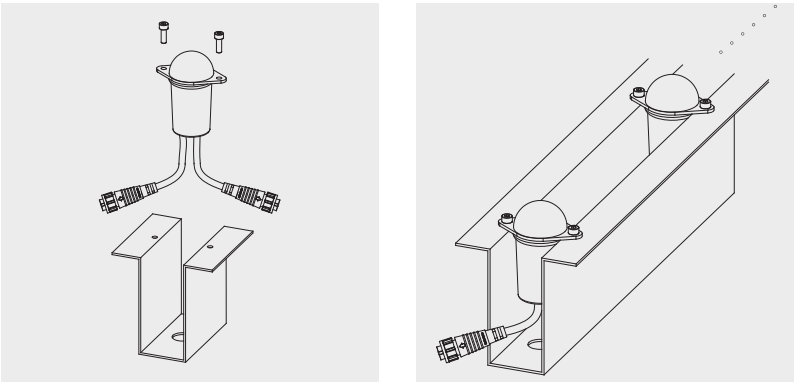



20.4032



材质: ADC12 铝合金灯体;
304# 不锈钢紧固螺丝;
硅胶密封垫;
铜镀镍防水接头;
抗 UV PC 胶罩

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30°C~ +50°C;
可调角度范围: 不可调;
灯具禁止安装在低洼处

线材: 单色常亮: 2 条 0.2 米 2 芯公母接头线, 线径 7.0mm;
DMX512 控制: 2 条 0.2 米 6 芯公母接头线, 线径 7.5mm

包装: 灯具净重: 0.26kg
包装尺寸: 690x470x285mm
包装容量: 100 灯 / 箱
包装毛重: 27kg

Material: ADC12 corrosion-resistant die-cast aluminum housing;
Anti-UV PC diffuser;
Anti-aging waterproof silicone gasket;
304 stainless steel external fasten screws

Finishing: Double layers of DUPONT UV-resistant polyester powder coating


Installation: Ambient temperature: -30°C~ +50°C ;
Single color: 2x0.2m length 2-cores Ø7.0mm power supply cable with waterproof connector;
DMX512 controllable: 2x0.2m length 6-cores Ø7.5mm cable with waterproof connector;
Nickled plated brass waterproof cable gland

Packaging: Net weight: 0.26kg
Outer carton: 690x470x285mm(100pcs/ctn)


Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.4032.D3V24	3X1W	2200K-5700K	Ra>80	360lm	3W	265lm	88lm/W	ON/OFF	150°
20.4032.D3CV24	3X1W	2200K-5700K	Ra>80	360lm	3W	265lm	88lm/W	DMX512	150°
20.4032.D6V24	6X0.82W	2200K-5700K	Ra>80	600lm	5W	450lm	90lm/W	ON/OFF	150°
20.4032.D6CV24	6X0.82W	2200K-5700K	Ra>80	600lm	5W	450lm	90lm/W	DMX512	150°
20.4032.E3SV12	3X1.6W	RGBW		290lm	5W	217.5lm	43.5lm/W	DMX512	150°



IP68 Waterproof male-female connector

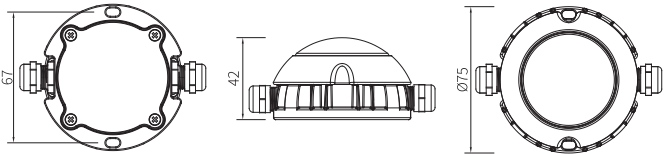


Installation:

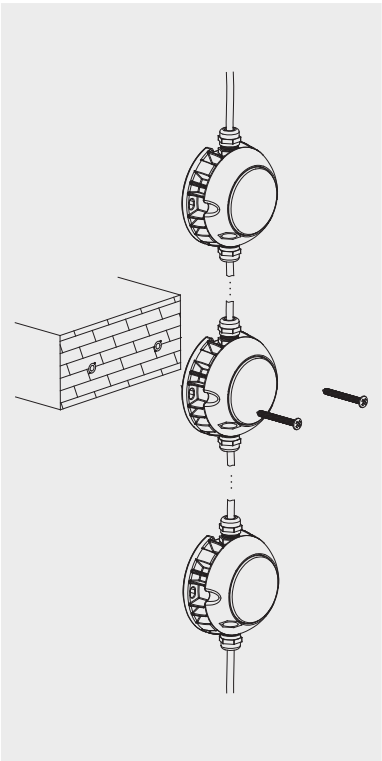



20.4034



材质：ADC12 铝合金灯体；
304# 不锈钢紧固螺丝；
硅胶密封垫；
铜镀镍防水接头；
抗 UV PC 胶罩

表面处理：双层耐侯耐腐蚀静电粉末喷涂

安装：适应环境温度：-30℃～ +50℃；
可调角度范围：不可调；
灯具禁止安装在低洼处

线材：单色常亮： 2 条 0.2 米 2 芯公母接头线，线径 7.0mm；
DMX512 控制： 2 条 0.2 米 6 芯公母接头线，线径 7.5mm

包装：灯具净重： 0.23kg
包装尺寸： 495x472x330mm
包装容量： 50 灯 / 箱
包装毛重： 13kg

Material: ADC12 corrosion-resistant die-cast aluminum housing;
Anti-UV PC diffuser;
Anti-aging waterproof silicone gasket;
304 stainless steel external fasten screws

Finishing: Double layers of DUPONT UV-resistant polyester powder coating


Installation: Ambient temperature: -30℃～ +50℃ ;
Single color: 2x0.2m length 2-cores Ø7.0mm power supply cable with waterproof connector;
DMX512 controllable: 2x0.2m length 6-cores Ø7.5mm cable with waterproof connector;
Nickled plated brass waterproof cable gland

Packaging: Net weight: 0.23kg
Outer carton: 495x472x330mm(50pcs/ctn)


Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.4034.D3V24	3X0.65W	2200K-5700K	Ra>80	240lm	2W	180lm	90lm/W	ON/OFF	150°
20.4034.D3CV24	3X0.65W	2200K-5700K	Ra>80	240lm	2W	180lm	90lm/W	DMX512	150°
20.4034.D9FV12	9X0.2W	RGB		76lm	1.8W	56lm	31.5lm/W	DMX512	150°
20.4034.D9SV12	6x0.2W+3x0.2W	RGB+W		118lm	2W	88lm	44lm/W	DMX512	150°



IP68 Waterproof male-female connector

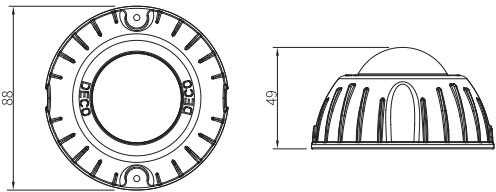


Installation：

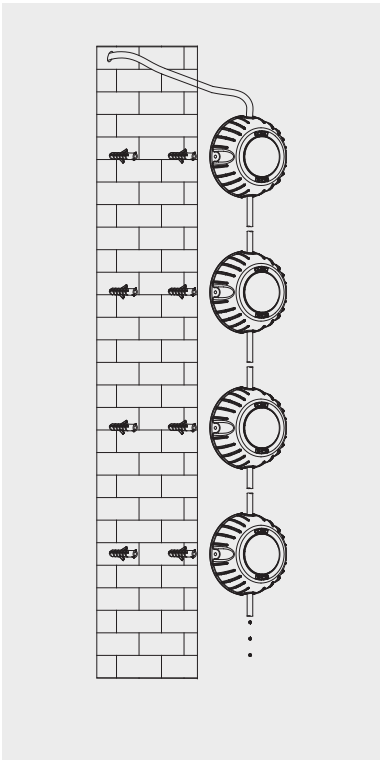



20.4035



材质: ADC12 铝合金灯体;
304# 不锈钢紧固螺丝;
硅胶密封垫;
铜镀镍防水接头;
抗 UV PC 胶罩;

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30°C~ +50°C;
可调角度范围: 不可调;
灯具禁止安装在低洼处

线材: 单色常亮: 2 条 0.2 米 2 芯公母接头线, 线径 7.0mm;
DMX512 控制: 2 条 0.2 米 6 芯公母接头线, 线径 7.5mm

包装: 灯具净重: 0.32kg
包装尺寸: 705X680X365mm
包装容量: 40 灯 / 箱
包装毛重: 14kg

Material: ADC12 corrosion-resistant die-cast aluminum housing;
Anti-UV PC diffuser;
Anti-aging waterproof silicone gasket;
304 stainless steel external fasten screws

Finishing: Double layers of DUPONT UV-resistant polyester powder coating


Installation: Ambient temperature: -30°C~ +50°C ;
Single color: 2x0.2m length 2-cores Ø7.0mm power supply cable with waterproof connector;
DMX512 controllable: 2x0.2m length 6-cores Ø7.5mm cable with waterproof connector;
Nickled plated brass waterproof cable gland

Packaging: Net weight: 0.32kg


Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.4035.D6V24	6X0.67W	2200K-5700K	Ra>80	490lm	4W	370lm	92.5lm/W	ON/OFF	150°
20.4035.D6CV24	6X0.67W	2200K-5700K	Ra>80	490lm	4W	370lm	92.5lm/W	DMX512	150°
20.4035.D12FV24	12X0.2W	RGB		101lm	2.4W	76lm	31.5lm/W	DMX512	150°
20.4035.E3SV12	3X1.6W	RGBW		290lm	5W	217.5lm	43.5lm/W	DMX512	150°



IP68 Waterproof male-female connector

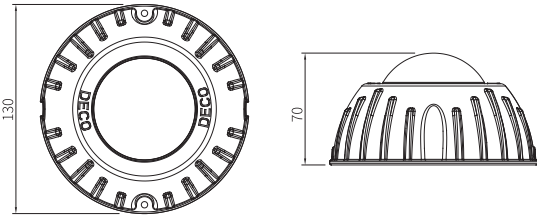


Installation:

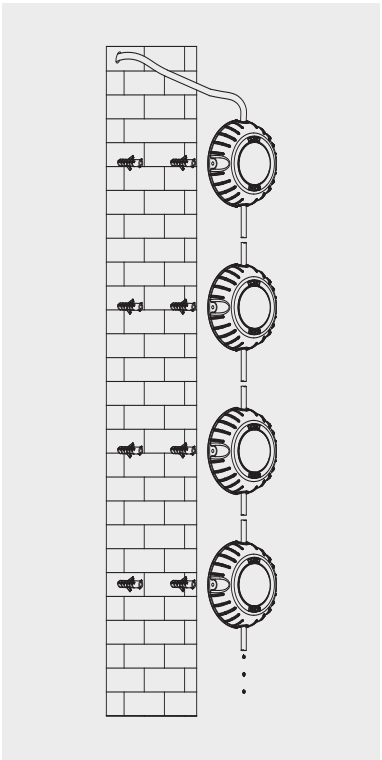



20.4041



材质: ADC12 铝合金灯体;
304# 不锈钢紧固螺丝;
硅胶密封垫;
铜镀镍防水接头;
抗 UV PC 胶罩

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30°C~ +50°C;
可调角度范围: 不可调;
灯具禁止安装在低洼处

线材: 单色常亮: 2 条 0.2 米 2 芯公母接头线, 线径 7.0mm;
DMX512 控制: 2 条 0.2 米 6 芯公母接头线, 线径 7.5mm

包装: 灯具净重: 0.23kg
包装尺寸: 565x410x275mm
包装容量: 80 灯 / 箱
包装毛重: 20kg

Material: ADC12 corrosion-resistant die-cast aluminum housing;
Anti-UV PC diffuser;
Anti-aging waterproof silicone gasket;
304 stainless steel external fasten screws

Finishing: Double layers of DUPONT UV-resistant polyester powder coating


Installation: Ambient temperature: -30°C~ +50°C ;
Single color: 2x0.2m length 2-cores Ø7.0mm power supply cable with waterproof connector;
DMX512 controllable: 2x0.2m length 6-cores Ø7.5mm cable with waterproof connector;
Nickled plated brass waterproof cable gland

Packaging: Net weight: 0.23kg
Outer carton: 565x410x275mm(80pcs/ctn)


Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.4041.D9FV12	9X0.2W	RGB		76lm	1.8W	56.7lm	31.5lm/W	DMX512	150°
20.4041.D9SV12	9x0.2w	RGBW		102lm	1.8W	78lm	43lm/W	DMX512	150°
20.4041.D3V24	3X1W	2200K-5700K	Ra>80	370lm	3W	280lm	92.5lm/W	ON/OFF	150°
20.4041.D3CV24	3X1W	2200K-5700K	Ra>80	370lm	3W	280lm	92.5lm/W	DMX512	150°



IP68 Waterproof male-female connector

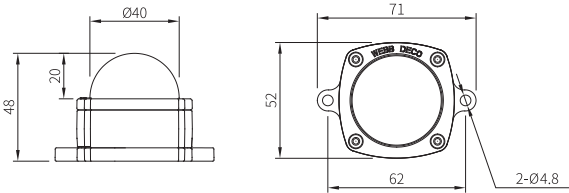


Installation:

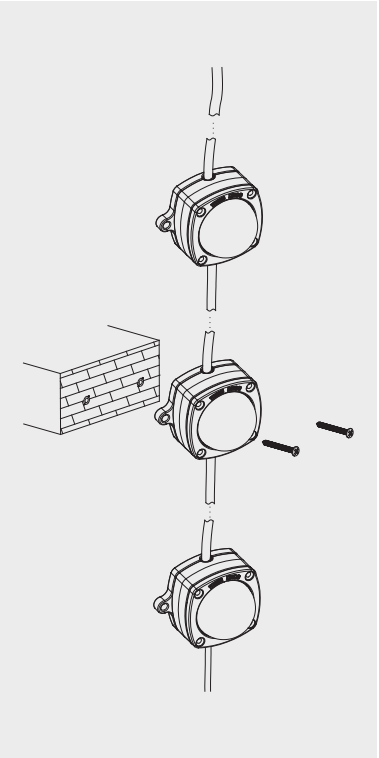



20.4037



材质: ADC12 铝合金灯体;
304# 不锈钢紧固螺丝;
硅胶密封垫;
铜镀镍防水接头;
3mm 钢化安全玻璃

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30℃~ +50℃;
可调角度范围: 水平方向, 不可调; 垂直方向, ±90°
灯具禁止安装在低洼处

线材: 单色常亮: 1 条 0.5 米两芯电源线, 线径 7.0mm

包装: 灯具净重: 0.6kg
内盒尺寸: 185x135x75mm
外箱尺寸: 560x385x250mm
包装容量: 30 灯 / 箱
包装毛重: 16kg

Material: ADC12 corrosion-resistant die-cast aluminum housing;
3mm clear safety glass;
Anti-aging waterproof silicone gasket;
304 stainless steel external fasten screws

Finishing: Double layers of DUPONT UV-resistant polyester powder coating

Installation: Ambient temperature:-30℃~ +50℃ ;
Tilttable: +/-90° ;
Single color: 1x0.5m length 2-cores Ø7.0mm power supply cables;
Nickled plated brass waterproof cable gland

Packaging: Net weight: 0.6kg
Outer carton: 560x385x250mm



20.4037A




20.4037L




20.4037W


20.4037



20.4037A





20.4037W

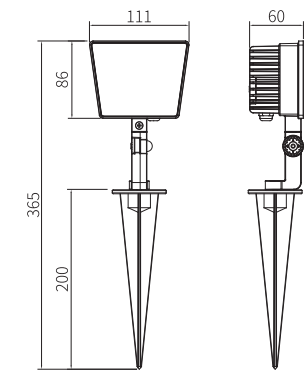



20.4037L

LED 8W
4000k
10°





H(m)	medlux	maxlux
2.0	1874.7	2753.7
5.0	304.9	448.5
10.0	71.7	107.6
20.0	17.9	26.9

LED 8W
4000k
15°





H(m)	medlux	maxlux
2.0	1168.7	1702
5.0	186.8	272.4
10.0	46.8	67.9
20.0	11.6	17.2

LED 8W
4000k
25°



H(m)	medlux	maxlux
2.0	493.3	735.5
5.0	80.7	116.6
10.0	17.9	26.9
20.0	4.5	7.1








LED 8W
4000k
80X135°



H(m)	medlux	maxlux
2.0	74.8	214.9
5.0	18.9	53.7
10.0	4.7	13.9
20.0	2.1	6.2


Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.4037A.B1V48	1X8W	2700K-5700K	Ra>80	1060lm	8W	880lm	110lm/W	ON/OFF	120°
20.4037A.A5V24	5X1.6W	2200K-5700K	Ra>80	1040lm	8W	820lm	102lm/W	ON/OFF	10°/15°/25°/10°x80°/Asymmetric 80°x135°
20.4037L.B1V48	1X8W	2700K-5700K	Ra>80	1060lm	8W	880lm	110lm/W	ON/OFF	120°
20.4037L.A5V24	5X1.6W	2200K-5700K	Ra>80	1040lm	8W	820lm	102lm/W	ON/OFF	10°/15°/25°/10°x80°/Asymmetric 80°x135°

Installation :

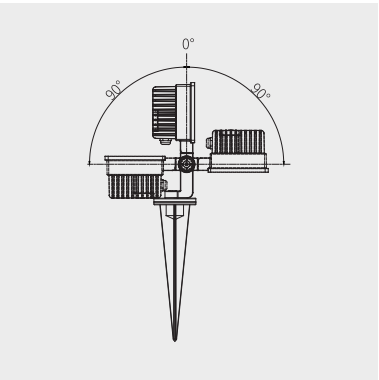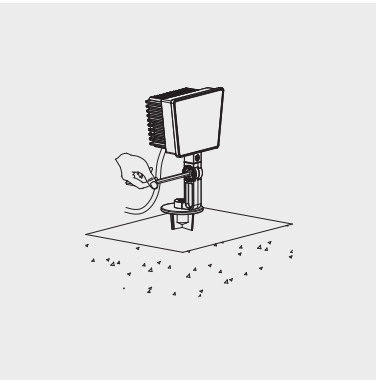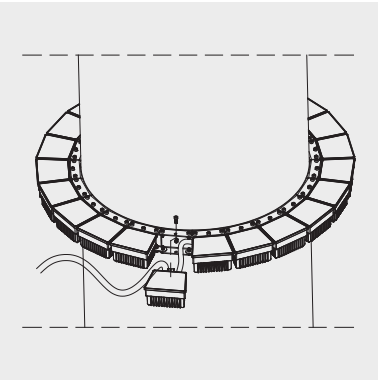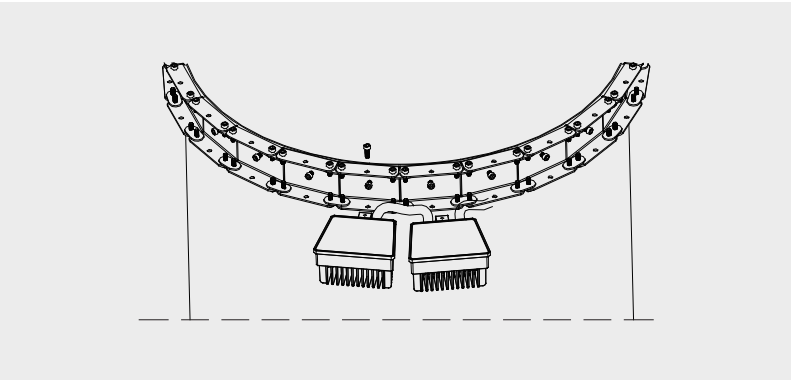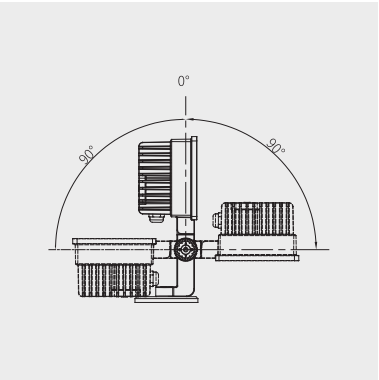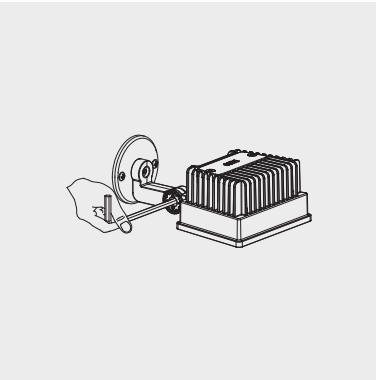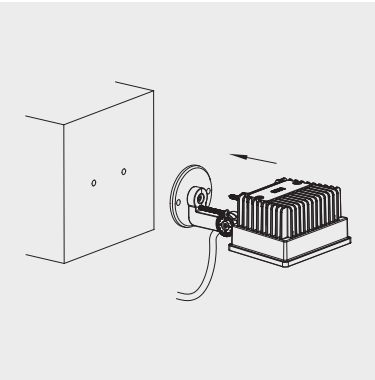



20.T040



材质: ADC12 铝合金灯体;
304# 不锈钢紧固螺丝;
硅胶密封垫;
铜镀镍防水接头;
3mm 钢化安全玻璃

表面处理: 双层耐侯耐腐蚀静电粉末喷涂

安装: 适应环境温度: -30℃~ +50℃;
可调角度范围: 不可调;
灯具禁止安装在低洼处

线材: 单色常亮: 2 条 0.2 米两芯公母接头线, 线径 7.0mm;
DMX512 控制: 2 条 0.2 米六芯公母接头线, 线径 7.5mm

包装: 灯具净重: 0.4kg
包装尺寸: 985x340x310mm
包装容量: 80 灯 / 箱
包装毛重: 33kg

Material: ADC12 corrosion-resistant die-cast aluminum housing;
3mm clear safety glass;
Anti-aging waterproof silicone gasket;
304 stainless steel external fasten screws

Finishing: Double layers of DUPONT UV-resistant polyester powder coating


Installation: Ambient temperature: -30℃~ +50℃ ;
Single color: 2x0.2m length 2-cores Ø7.0mm power supply cable with waterproof connector;
DMX512 controllable: 2x0.2m length 6-cores Ø7.5mm cable with waterproof connector;
Nickled plated brass waterproof cable gland









Packaging: Netweight: 0.4kg
Outer carton: 985x340x310mm(80pcs/ctn)



IP68 Waterproof male-female connector

20.T040

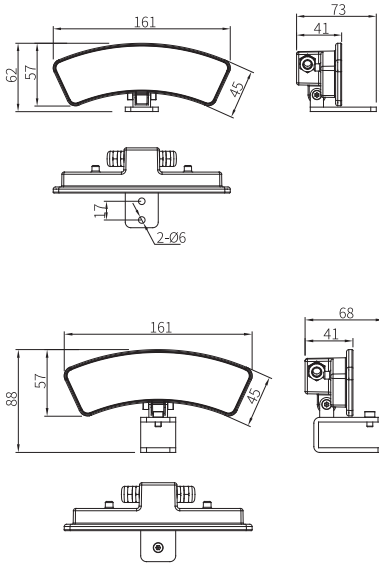

 LED 8W 4000k 15°			H(m) 2.0 5.0 10.0 20.0	medlux 1168.7 186.8 46.8 11.6	maxlux 1702 272.4 67.9 17.2
 LED 8W 4000k 25°			H(m) 2.0 5.0 10.0 20.0	medlux 493.3 80.7 17.9 4.5	maxlux 735.5 116.6 26.9 7.1
 LED 24W 4000k 40°			H(m) 2.0 5.0 10.0 20.0	medlux 206.3 35.8 8 3.6	maxlux 278 44.8 11.7 4.5
 LED 24W 4000k 60°			H(m) 2.0 5.0 10.0 20.0	medlux 80.7 10.9 2.6 0.6	maxlux 107.6 15.2 4.5 1.8

Model No.	LED Qty X Power	LED Color	CRI	Light source Luminous Flux @4000K	System Power	Luminaire Luminous Flux @4000K	Luminaire Efficacy	Control Mode	Beam Angle
20.T040.D4V24	4X1W	2200K-5700K	Ra>80	500lm	4W	385lm	96lm/W	ON/OFF	15°/25°/40°/60°
20.T040.A4V24	4X2W	2200K-5700K	Ra>80	1050lm	8W	800lm	100lm/W	ON/OFF	10°/25°/40°/60°

Installation:

